



BEVERAGE-AIR®

2019
CATALOG



**YOUR COMPLETE
REFRIGERATION
SOURCE**

888-845-9800 | beverage-air.com



BEVERAGE-AIR

DELIVERING UNMATCHED VALUE AND QUALITY SINCE 1944

Founded in 1944 by John Buffington, Beverage-Air is a leading manufacturer of commercial refrigeration equipment for the food service industry. Our legacy of innovation began with the invention of the first horizontal bottle cooler over 70 years ago. Beverage-Air is defined by a resolute commitment to our customers, the industry, and the environment.

In 2008, the Ali Group acquired Beverage-Air. The Ali Group is one of the largest and most diversified global leaders in the food service equipment industry. Founded in 1963 by Luciano Berti, Ali Group today employs more than 10,000 people in 30 countries and operates 57 manufacturing facilities worldwide.

Beverage-Air corporate headquarters is located in Winston-Salem, North Carolina, and in an effort to leverage efficiencies in manufacturing and distribution, all of these operations are now based in Brookville, Pennsylvania. The Brookville operation is a state of the art facility, employing committed people, many of whom have worked in the industry their entire professional lives. Often second and third generation employees work side by side to drive innovating thinking and quality manufacturing.

**On behalf of everyone at Beverage-Air, we would like to thank you
for your continued support of the Beverage-Air brand.**





Beverage-Air has a full range of premium refrigeration and food service equipment solutions to meet the diverse needs of convenience stores, supermarkets, restaurants, and other retail environments.





BEVERAGE-AIR

AFTERMARKET SERVICES

As a Beverage-Air customer, our commitment to you continues with the ongoing support of our aftermarket services. This program provides you access to a full range of support tools.

YOU HAVE ACCESS TO THE FOLLOWING:

- Ongoing technical support via telephone
- Product Customization
- Qualified parts distributor network
- Qualified network of reputable service technicians
- 24/7 Service and maintenance dispatch
- Online manuals & parts breakdown
- Online warranty claims processing
(warranty on page 150)

CUSTOMER COMMITMENT

Committed to innovation, excellence, and customer satisfaction, Beverage-Air continually works to leverage efficiencies in manufacturing and distribution to benefit our customers.

WE COMMIT ALL OF THE FOLLOWING TO YOU:

- Industry-leading quality and customer satisfaction
- Award-winning product innovation
- Competitive pricing
- Factory Inventory
- Energy efficient products
- Complete aftermarket services

Factory Headquarters Sales Office

3779 Champion Blvd
Winston-Salem, NC 27105
Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

24/7 Warranty Service Dispatch

(877) 866-1223

Factory Technical Service

Phone: (800) 684-1199
Fax: (800) 262-9381

Factory Customer Service

Phone: (888) 845-9800
Fax: (800) 253-5168



TABLE OF CONTENTS

Top Mount Reach-Ins 4

HR/HF	Horizon Series	6
-------	----------------	---

Bottom Mount Reach-Ins 12

RB/FB	Vista Series	14
HBR/HBF	Horizon Series	18
RI	RI Series	22

Spec Line 26

PR/PH/PF	P-Series	28
CT	Cross-Temp Series	36
CF/BF	Blast Chillers	40
BC	Williams Blast Chillers	42

Glass Door Merchandisers 46

MT	Marketeer Series	48
MM	MarketMax Series	50
CR/CF/CTF	Countertop Units	54
BDC/NC	Dipping Cabinets	56

Open Air Merchandisers 62

BZ	Breeze Series	64
VM	VueMax	66

Food Prep Tables 70

SPE	Elite Series	72
DP	Pizza Prep Tables	86

Worktops & Undercounters 96

WTR/WTF	Worktops	98
UCR/UCF	Undercounters	110

Chef Bases 120

WTRC/WTFC	Chef Bases	122
-----------	------------	-----

Bar & Wine Equipment 126

DD/DZ/BM	Direct Draw	128
BM23/DZ24	Bar Mobile	132
BB/DZ	Back Bar	134
DW	Bottle Coolers	144
GF/FLG	Glass & Plate Chiller	146

Milk Coolers 152

SM	Single Access	155
ST	Dual Access	156

Beverage-Air

Warranty	158
Contacts/Directory	160





TOP MOUNT REACH-INS

DESIGNED TO EXCEED EXPECTATIONS IN TOUGH KITCHEN ENVIRONMENTS

HORIZON[®] SERIES

Heavy Duty Construction

2" CFC and HCFC-free foamed-in place polyurethane insulation

Full electronic Control

with one-touch defrost

Multiple finish options

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

Cam-lift hinges

with 120 degree stay open feature

LED lighting standard

Back rack airflow distribution system

Anti-microbial door handles

Self-closing doors

6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order

**HC models featuring environmentally friendly,
energy efficient R290 refrigerant**



**DESIGNED TO PERFORM IN
HIGH AMBIENT CONDITIONS**

**3 YEAR PARTS AND LABOR /
ADDITIONAL 2 YEAR COMPRESSOR PART WARRANTY**

MADE IN USA



BACK CHANNEL
to promote air flow



FIELD REVERSIBLE DOORS
for flexibility to get your kitchen set
up exactly how you want it

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves
- Wine models

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



HORIZON® SERIES

REFRIGERATORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

		MODEL NUMBERS				MAINTAINS PRODUCT TEMPERATURES OF 36-38 °F									
MODEL WIDTH	DOOR TYPE	STANDARD FINISH	FINISH P	FINISH S	FINISH PS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	
26" 1 SECTION	SOLID	HR1HC-1S	HRP1HC-1S	HRS1HC-1S	HRPS1HC-1S	1/3	115	1/4	4.3	21.17	26	33.63	78.5	326	
	HALF SOLID	HR1HC-1HS	HRP1HC-1HS	HRS1HC-1HS	HRPS1HC-1HS	2/3								324	
	GLASS	HR1HC-1G	HRP1HC-1G	HRS1HC-1G	HRPS1HC-1G	1/3	115	1/4	4.3	22.28				429	
	HALF GLASS	HR1HC-1HG	HRP1HC-1HG	HRS1HC-1HG	HRPS1HC-1HG	2/3								356	
35" 1 WIDE SECTION	SOLID	HR1W-1S	HRP1W-1S	HRS1W-1S	HRPS1W-1S	1/3	115	1/3	5.8	30.76	35	33.63	78.5	418	
	GLASS	HR1W-1G	HRP1W-1G	HRS1W-1G	HRPS1W-1G									429	
52" 2 SECTIONS	SOLID	HR2-1S	HRP2-1S	HRS2-1S	HRPS2-1S	2/6	115	1/3	8.4	46.88	52	33.63	78.5	506	
	HALF SOLID	HR2-1HS	HRP2-1HS	HRS2-1HS	HRPS2-1HS									543	
	GLASS	HR2-1G	HRP2-1G	HRS2-1G	HRPS2-1G									571	
	HALF GLASS	HR2-1HG	HRP2-1HG	HRS2-1HG	HRPS2-1HG									543	
78" 3 SECTIONS	SOLID	HR3-1S	HRP3-1S	HRS3-1S	HRPS3-1S	3/9	115	1/2	10	71.52	78	33.63	78.5	791	
	HALF SOLID	HR3-1HS	HRP3-1HS	HRS3-1HS	HRPS3-1HS									791	
	GLASS	HR3-1G	HRP3-1G	HRS3-1G	HRPS3-1G									737	
	HALF GLASS	HR3-1HG	HRP3-1HG	HRS3-1HG	HRPS3-1HG									791	

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

FINISH OPTIONS REFRIGERATOR & FREEZER		
SUFFIX	EXTERIOR	INTERIOR
(standard)	Stainless steel front with continuous coil coated sides	Corrosion resistant aluminum
P	Stainless steel front with stainless steel sides	Corrosion resistant aluminum
S	Stainless steel front with continuous coil coated sides	Stainless steel
PS	Stainless steel front with stainless steel sides	Stainless steel

AVAILABLE OPTIONS	
SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: HR2-1S-18	

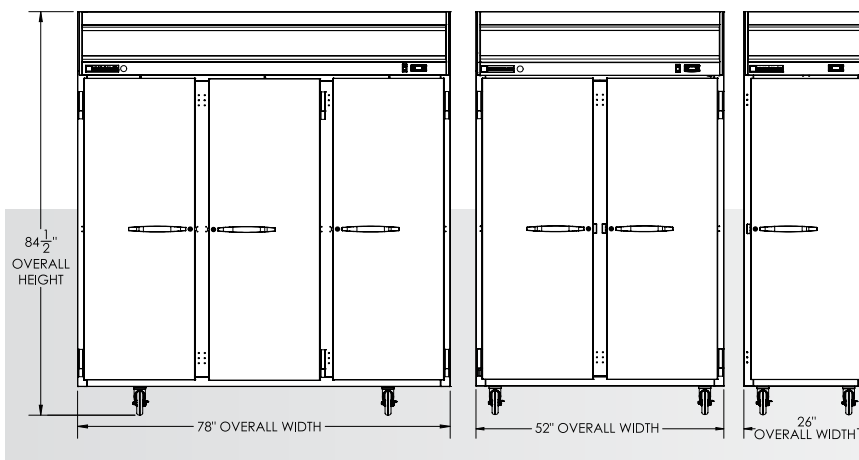

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

REFLECTORS

MAIN HANGING PRODUCT TEMPERATURES OF 10 °F


		MODEL NUMBERS												
MODEL WIDTH	DOOR TYPE	STANDARD FINISH	FINISH P	FINISH S	FINISH PS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	HF1HC-1S	HFP1HC-1S	HFS1HC-1S	HFPS1HC-1S	1/3	115	3/4	8.8	21.06	26	33.63	78.5	336
	HALF SOLID	HF1HC-1HS	HFP1HC-1HS	HFS1-1HS	HFPS1HC-1HS	2/3								340
	GLASS	HF1HC-1G	HFP1HC-1G	HFS1HC-1G	HFPS1HC-1G	1/3								368
	HALF GLASS	HF1HC-1HG	HFP1HC-1HG	HFS1HC-1HG	HFPS1HC-1HG	2/3								360
35" 1 WIDE SECTION	SOLID	HF1W-1S	HFP1W-1S	HFS1W-1S	HFPS1W-1S	1/3	115	1/2	7.8	30.76	35	33.63	78.5	334
52" 2 SECTIONS	SOLID	HF2-1S	HFP2-1S	HFS2-1S	HFPS2-1S	2/6	115	3/4	12	49	52	33.63	78.5	568
	HALF SOLID	HF2-1HS	HFP2-1HS	HFS2-1HS	HFPS2-1HS	4/6								550
	GLASS	HF2-1G	HFP2-1G	HFS2-1G	HFPS2-1G	2/6	115	1	16					625
	HALF GLASS	HF2-1HG	HFP2-1HG	HFS2-1HG	HFPS2-1HG	4/6								550
78" 3 SECTIONS	SOLID	HF3-5S	HFP3-5S	HFS3-5S	HFPS3-5S	3/9	208	1	8.4	74	78	33.5	78.5	732
	HALF SOLID	HF3-5HS	HFP3-5HS	HFS3-5HS	HFPS3-5HS	6/9								732
	GLASS	HF3-5G	HFP3-5G	HFS3-5G	HFPS3-5G	3/9	208	1-1/2	16					732
	HALF GLASS	HF3-5HG	HFP3-5HG	HFS3-5HG	HFPS3-5HG	6/9								732

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

ADAPTIVE DEFROST

- Reduces energy consumption up to 15%
- Units are able to provide a consistent product temperature throughout the cabinet even during defrost cycles
- Reduces the overall time defrosting versus traditional timed defrost
- Example: Adaptive Defrost: 48 min total in 4 cycles versus 60 min in 3 cycles (Traditional 8HR)
- High Ambient and Humidity testing shows the system's ability to perform better in high usage environments under unfavorable conditions

Increased Consistency of Product Temperatures (Fahrenheit)

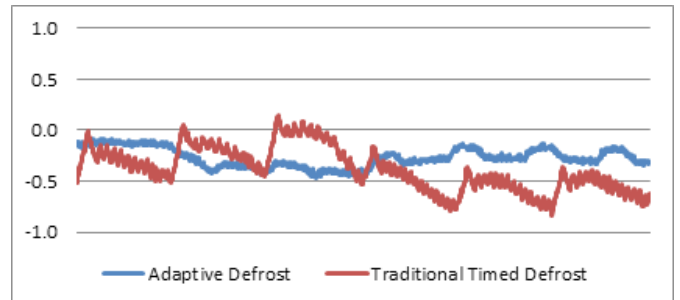

Top Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
-------------	---------	-------------

SHELVING / ORGANIZERS

Epoxy Coated Wire Shelf	H Series Flat Shelving 1 Door Unit	403-889D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving HR1W Units	403-888D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving 2 Door Unit	403-887D-01
Epoxy Coated Center Shelf	H Series Flat Shelving 3 Door Unit	403-893D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving 3 Door Unit	403-887D-01
S/S Shelves	H Series Flat Shelving 1 Door Unit	403-889D-04
S/S Shelves	H Series Flat Shelving 1 Door Wide Unit	403-888D-04
S/S Shelves	H Series Flat Shelving 2 & 3 Door Unit	403-887D-04
S/S Shelves	H Series Flat Shelving 3 Door Unit-Center	403-893D-04
Shelf Clip	Any H Series Unit	403-169A

MOUNTING


6" Caster	Any H Series Unit (set of four)	61C01-001A
3" Caster	Any H Series Unit (set of four)	61C01-013A
6" Black Leg	Any H Series Unit (set of four)	58B02S001A
6" Seismic/Flanged Legs	Any H Series Unit (set of four)	00C31-055A

ADDITIONAL ACCESSORIES

Door Lock	Any Glass Door H Series Unit (per door)	61C11S032A
S/S Breakers Half Door	Any H Series Unit	61C08-019A
S/S Breakers Full Door	Any H Series Unit	61C08-020A

TRAY SLIDE KITS

TYPE "A" STANDARD & EXTRA WIDE UNITS		
1 tray slide set for: one 18x26" pan, or two 14x18" pans	H-Series	10601211S
TYPE "A/C" STANDARD & EXTRA WIDE UNITS		
1 tray slide set for: one 18x26" pan, or two 14x18" pans, or two 12x20" pans	H-Series	10601201S
KIT #4 EPOXY COATED WIRE ROD TRAY SLIDE		
19 SETS PER 1/2 SECTION	H Series - 1 Door Unit	61C31-251A-01 (2)
	H Series - 2 Door Unit	61C31-251A-02 (2)
	H Series - 3 Door	61C31-251A-03 (2)

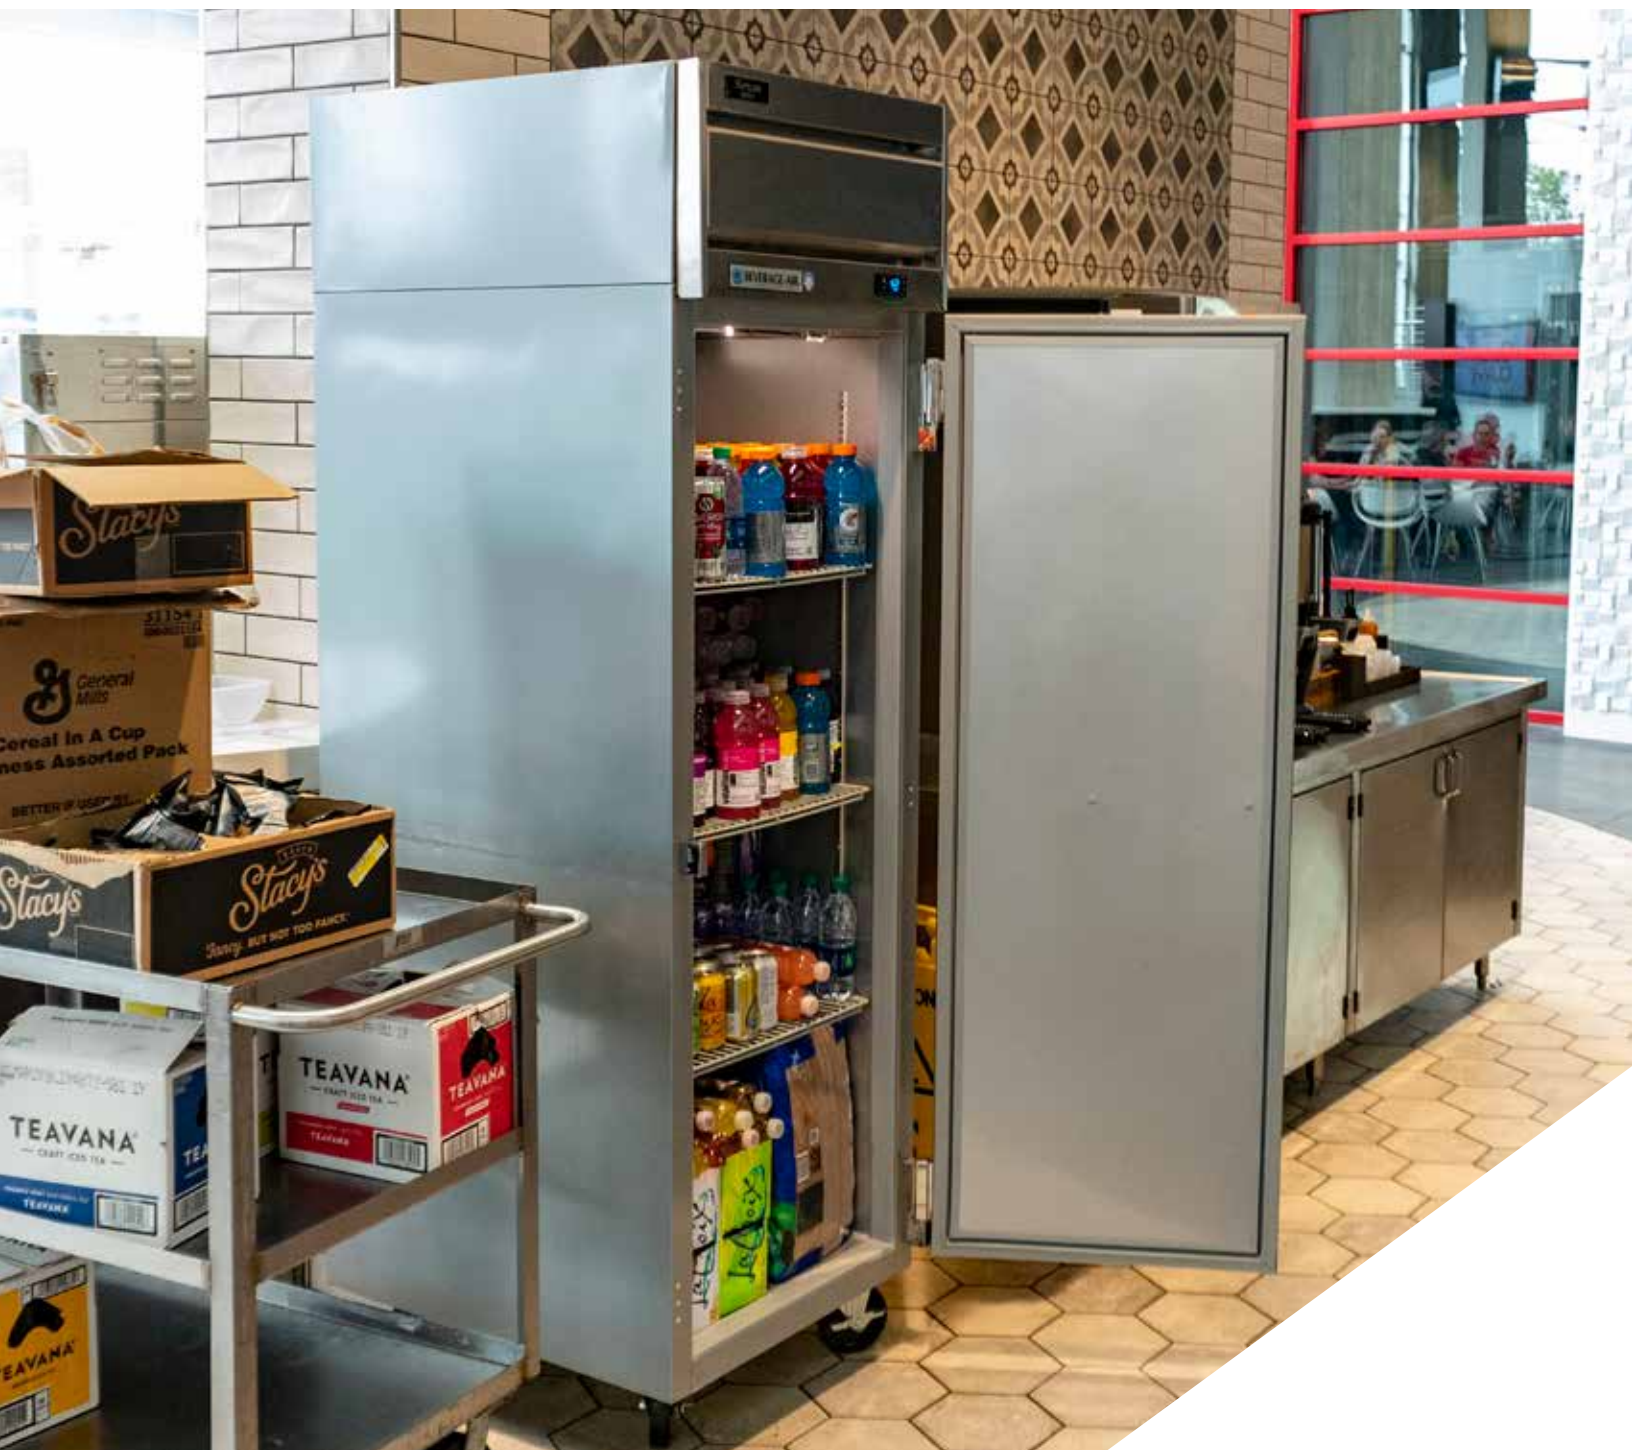





BOTTOM MOUNT REACH-INS

MULTIPLE OPTIONS TO MEET ANY COOLING CHALLENGE OR ENVIRONMENT

VISTA® SERIES

Full electronic control

Door locks standard

(solid doors only, optional on glass door models)

One piece grille

Cartridge style door hinges

with 120 degree stay-open feature

LED lighting standard

Anti-microbial door handles

Self-closing doors

Right and left hand hinged models available

(specify at time of order)

6" heavy duty casters standard

(3" casters or 6" leg option available
at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 2 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



DOOR LOCKS STANDARD

on solid door units for loss prevention
(available as an option for glass doors)



ANTI-MICROBIAL HANDLES

destroy or inhibit microorganisms,
helping prevent the spread of germs

AVAILABLE DOORS

- Solid (one full-door)
- Glass (one full-door)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides

INTERIOR FINISHES

- Corrosion resistant aluminum

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



VISTA® SERIES

REFRIGERATORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	SOLID	RB23HC-1S	1/3	115	1/4	3	23.1	27	33.75	78	316
	GLASS	RB23HC-1G									346
30" 1 SECTION	SOLID	RB27HC-1S	1/3	115	1/4	3	25.88	30	33.75	78	358
	GLASS	RB27HC-1G									373
52" 2 SECTIONS	SOLID	RB49HC-1S	2/6	115	1/3	5	46.15	52	33.75	78	536
	GLASS	RB49HC-1G									566
75" 3 SECTIONS	SOLID	RB72HC-1S	3/9	115	1/2	6.2	68.93	75	33.75	78	696
	GLASS	RB72HC-1G									696

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: RB49HC-1S-18	

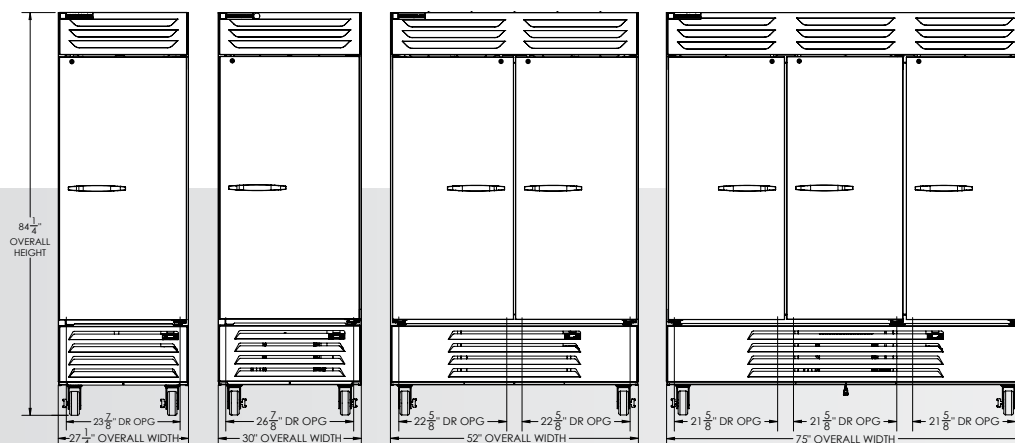

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	SOLID	FB23HC-1S	1/3	115	3/4	7.5	22.5	27.25	33.75	78	408
	GLASS	FB23HC-1G									
30" 1 SECTION	SOLID	FB27HC-1S	1/3	115	3/4	7.5	26.57	30	33.75	78	438
	GLASS	FB27HC-1G									
52" 2 SECTIONS	SOLID	FB49HC-1S	2/6	115	3/4	11	46.2	52	33.75	78	564
	GLASS	FB49HC-1G									
75" 3 SECTIONS	SOLID	FB72-1S	3/9	115	3/4	11.9	68.5	75	33.75	78	725
	GLASS	FB72-G									

*Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.*



HORIZON[®] SERIES

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Full electronic Control

with one-touch defrost

Door locks standard

(solid doors only, optional on glass door models)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Anti-microbial door handles

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 2 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



FULL ELECTRONIC CONTROL
with easy to read digital display



ANTI-MICROBIAL HANDLES
destroy or inhibit microorganisms,
helping prevent the spread of germs

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits
- Wine models
- Dual-temp

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available




HORIZON® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	HBR12HC-1	1/4	115	1/6	2	12.06	24	26	62	250
27" 1 SECTION	SOLID	HBR23HC-1	1/3	115	1/4	3	23.1	27.25	33.75	78	400
	HALF SOLID	HBR23-1-HS	2/3	115	1/3	5.8					400
	GLASS	HBR23HC-1-G	1/3	115	1/4	3					392
	HALF GLASS	HBR23HC-1-HG	2/3	115	1/4	3					436
30" 1 SECTION	SOLID	HBR27HC-1	1/3	115	1/4	3	25.88	30	33.75	78	396
	HALF SOLID	HBR27-1-HS	2/3	115	1/3	5.8					373
	GLASS	HBR27HC-1-G	1/3	115	1/4	3					378
	HALF GLASS	HBR27HC-1-HG	2/3	115	1/4	3					414
47" 2 SECTIONS	SOLID	HBR44HC-1	2/6	115	1/3	5	40.2	47	33.75	78	534
	HALF SOLID	HBR44-1-HS	4/6	115	1/3	8.8					530
	GLASS	HBR44HC-1-G	2/6	115	1/3	5					538
	HALF GLASS	HBR44HC-1-HG	4/6	115	1/3	5					538
52" 2 SECTIONS	SOLID	HBR49HC-1	2/6	115	1/3	5	46.15	52	33.75	78	594
	HALF SOLID	HBR49-1-HS	4/6	115	1/3	8.8					530
	GLASS	HBR49HC-1-G	2/6	115	1/3	5					608
	HALF GLASS	HBR49HC-1-HG	4/6	115	1/3	5					604
75" 3 SECTIONS	SOLID	HBR72HC-1	3/9	115	1/2	6.2	68.93	75	33.75	78	764
	HALF SOLID	HBR72-1-HS	3/9	115	1/2	9.9A					771
	GLASS	HBR72HC-1-G	3/9	115	1/2	6.2					764
	HALF GLASS	HBR72-1-HG	3/9	115	1/2	9.9A					771

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

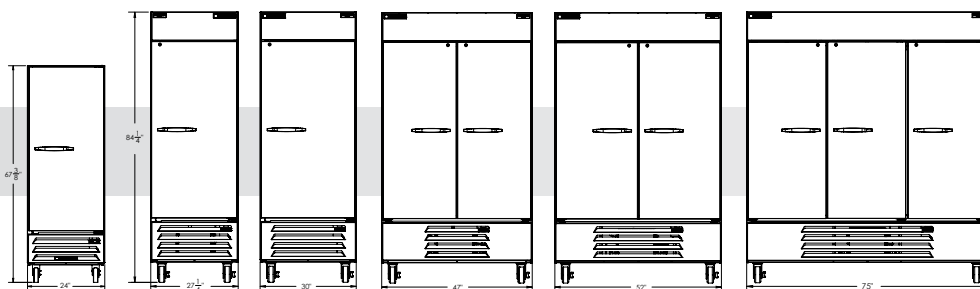

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: HBR49-1-HS-18	

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	HBF12HC-1-S	1/3	115	1/2	5	11.9	24	26	62	284
	GLASS	HBF12HC-1-G									284
27" 1 SECTION	SOLID	HBF23HC-1-S	1/2	115	3/4	7.5	22.5	27.25	33.75	78	412
	HALF SOLID	HBF23-1-HS			1/2	10.9	23				428
	GLASS	HBF23HC-1-G			3/4	7.5	22.5				446
	HALF GLASS	HBF23-1-HG			1/2	10.9	23				452
30" 1 SECTION	SOLID	HBF27HC-1-S	1/2	115	3/4	7.5	26.57	30	33.75	78	516
	HALF SOLID	HBF27-1-HS				11.9	27				516
	GLASS	HBF27-1-G				11.9	26.88				516
47" 2 SECTIONS	SOLID	HBF44-1-S	2/6	115	3/4	11.9	44	47	33.75	78	562
	HALF SOLID	HBF44-1-HS									598
	GLASS	HBF44-1-G									588
52" 2 SECTIONS	SOLID	HBF49HC-1-S	2/6	115	3/4	11	46.2	52	33.75	78	750
	HALF SOLID	HBF49-1-HS				11.9	49				750
	GLASS	HBF49-1-G				11.9	46.2				790
75" 3 SECTIONS	SOLID	HBF72-1	3/9	120/240	1	11.9	68.5	75	33.75	78	758
	HALF SOLID	HBF72-1-HS	3/9	120/240	3/4	11.9	72	75	33.75	78	790
	GLASS	HBF72-5-G	3/9	120/240	1	11.9	68.5	75	33.75	78	858

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 HALF SECTIONS (1 FRIDGE/1 FREEZER)	HALF SOLID	HBRF23-1	2/4	115	R: 1/2 F: 1/3	R: 12 F: 2.8	R: 5.38 F: 5.46	27.25	33.75	78	448
52" 2 SECTIONS (1 FRIDGE/1 FREEZER)	SOLID	HBRF49-1	2/6	115	R: 1/2 F: 1/3	R: 10.9 F: 5.8	R: 22.57 F: 23.1	52	33.75	78	580
	GLASS	HBRF49-1-G									530
75" 3 SECTIONS (FRIDGE/FREEZER)	SOLID	HBRF72-1	3/9	115	R: 1/2 F: 1/3	R: 10.9 F: 8.8	72	75	33.75	78	715
	GLASS	HBRF72-1-G									715

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

RI SERIES

Compact design

to fit challenging kitchen layouts

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Anti-microbial door handles

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

**HC models featuring
environmentally friendly,
energy efficient R290
refrigerant**



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 2 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



FULL ELECTRONIC CONTROL
with easy to read digital display



ANTI-MICROBIAL HANDLES
destroy or inhibit microorganisms,
helping prevent the spread of germs

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)
- Half Glass, Half Solid (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators

REFRIGERATORS (REACH-IN)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	SOLID	RI18HC	1/4	115	1/4	5.5	16.85	27.25	29.25	69	322
	HALF SOLID	RI18HC-HS									328
	GLASS	RI18HC-G									367
	HALF GLASS	RI18HC-HG									334
	HALF GLASS HALF SOLID	RI18HC-HGS									334

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS (PASS-THRU)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	HALF SOLID	RID18HC-HS	1/4	115	1/4	5.5	18.38	27.25	32.63	69	442
	HALF GLASS HALF SOLID	RID18HC-HGS									

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: RI18HC-HS-18	



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Pass-thru models available
- Additional shelves
- Wire shelf divider
- Bottle cartridge kit

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

Bottom Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
-------------	---------	-------------

SHELVING / ORGANIZERS

Epoxy Coated Wire Shelf	RB/FB/HBR/HBF23	403-900D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF27	403-871D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF49	403-873D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF72	403-874D-02
Epoxy Coated Wire Shelf	RI18	403-463D
Shelf Clip	RB/FB/HBR/HBF	403-169A
Flat Wine Rack with Bottle Support	RB/FB/HBR23	403-928D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR27	403-929D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR49	403-930D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR72	403-931D-03
Wire Divider	RI Series	403-719C

MOUNTING

3" Stem w/Brake	RB/FB/HBR/HBF (per caster-2 required per cabinet)	401-633A
3" Stem	RB/FB/HBR/HBF (per caster-2 required per cabinet)	401-634A
6" Caster	RB/FB/HBR/HBF	61C01-014D-01
6" Seismic/Flanged Legs	RB/FB/HBR/HBF Series (set of four)	00C31-055A
3" Caster	RI Series	401-695B
3" Caster With Brake	RI Series	401-696B
6" Caster	RI Series	401-275A
6" Caster With Brake	RI Series	401-276A
6" Black Legs	RI Series	401-405A

ADDITIONAL ACCESSORIES

Door Lock	RB/FB/HBR/HBF (SOLID DOORS)	401-274A
-----------	-----------------------------	----------

TRAY SLIDE KITS

KIT #3 STAINLESS STEEL UNIVERSAL TRAY SLIDE		
8 SETS PER 1/2 SECTION	RB/FB/HBR/HBF 23	61C08-038A-02 (2)
	RB/FB/HBR/HBF 49	61C08-038A-01 (2)







SPEC LINE

SPECIALTY UNITS READY FOR ANY LAYOUT AND PERFORMANCE SOLUTION

P SERIES

Stainless steel breakers

LED lighting

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Expansion valve technology

Freezer only

Anti-microbial door handles

Door locks standard

Solid doors only (optional on glass door models)

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 epoxy coated wire shelves

per section

Removable access panel

for ease of service and maintenance



**MAXIMUM RESISTANCE TO WEAR AND TEAR
WITH STAINLESS STEEL BREAKER CAPS AND DOOR LINERS**

**MODULAR INTERIOR GIVES ULTIMATE FLEXIBILITY
FOR SHELF AND SLIDE COMBINATIONS**

3 YEAR PARTS AND LABOR WARRANTY



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18",
or two 12x20"

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

CONFIGURATIONS

- Reach-in
- Pass-thru
- Roll-in / Roll-thru / Extra-tall
- Dual-temp

Spec Line Refrigeration



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AGENCY CERTIFICATIONS



AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits
- Glass door locks
- Stainless steel shelves
- Chrome-plated shelves
- Kick plate

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

P SERIES

REFRIGERATORS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PR1-1AS	1/3	115	1/3	9.8	20.9	26.50	34.63	77.75	320
	HALF SOLID	PR1-1AHS	2/3	115	1/3	9.8	20.9	26.50	34.63	77.75	320
	GLASS	PR1-1BG	1/3	115	1/3	9.2	20.6	26.50	33.38	77.75	406
	HALF GLASS	PR1-1BHG	2/6	115	1/3	9.2	20.6	26.50	33.38	77.75	398
52" 2 SECTION	SOLID	PR2-1AS	2/6	115	1/3	10.7	43.3	52.13	34.63	77.75	483
	HALF SOLID	PR2-1AHS	4/6	115	1/3	10.7	44.3	52.13	34.63	77.75	483
	GLASS	PR2-1BG	2/6	115	1/2	12	43.3	52.13	33.38	77.75	600
	HALF GLASS	PR2-1BHG	4/6	115	1/2	12	43.3	52.13	33.38	77.75	624
78" 3 SECTIONS	SOLID	PR3-1AS	3/9	115	1/2	13.8	67.9	77.75	34.63	77.75	625
	HALF SOLID	PR3-1AHS	6/9		1/2	13.8	67.9				
	GLASS	PR3-1BG	3/9	115	1/2	13.8	67.9	77.75	33.38	77.75	841
	HALF GLASS	PR3-1BHG	6/9		1/2	13.8	67.9				

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PRD1-1AS	2/3	115	1/3	9.8	22.2	26.50	38.38	77.75	370
	HALF SOLID	PRD1-1AHS	4/3	115	1/3	9.8	22.2	26.50	38.38	77.75	370
	GLASS	PRD1-1BG	2/3	115	1/3	9.2	22.2	26.50	35.88	77.75	471
	HALF GLASS	PRD1-1BHG	4/3	115	1/3	9.2	22.2	26.50	35.88	77.75	436
52" 2 SECTION	SOLID	PRD2-1AS	4/6	115	1/3	10.7	48	52.13	38.38	77.75	682
	HALF SOLID	PRD2-1AHS	8/6	115	1/3	10.7	48	52.13	38.38	77.75	652
	GLASS	PRD2-1BG	4/6	115	1/3	12.8	48	52.13	35.88	77.75	738
	HALF GLASS	PRD2-1BHG	8/6	115	1/3	11.9	48	52.13	35.88	77.75	738
78" 3 SECTIONS	SOLID	PRD3-1AS	6/9	115	1/2	12	75.1	77.75	38.38	77.75	950
	HALF SOLID	PRD3-1AHS	12/9	115	1/2	12	75.1	77.75	38.38	77.75	950
	GLASS	PRD3-1BG	6/9	115	1/2	12	75.1	77.75	35.88	77.75	912
	HALF GLASS	PRD3-1BHG	12/9	115	1/2	12	75.1	77.75	35.88	77.75	912

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

Spec Line Refrigeration

REFRIGERATORS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PRI1-1AS	N/A	115	1/3	9.5	35	36.5	36.13	84	381
		PRI1XT								89.63	390
69" 2 SECTION	SOLID	PRI2-1AS	N/A	115	1/3	13	44.2	68.88	36.13	84	600
		PRI2XT								89.63	630

REFRIGERATORS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PRT1-1AS	N/A	115	1/3	11.8	35	36.5	39.88	84	420
69" 2 SECTION	SOLID	PRT2-1AS	N/A	115	1/2	13	71	68.88	39.88	84	683

Depth measurement includes handles.

DUAL-TEMPS - REACH-IN

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 HALF SECTIONS (1 FRIDGE/1 FREEZER)	HALF SOLID	PRF12-12HC-1HS	2/4	115	R:1/6 F:1/2	R:3 F:7	R:8.56 F:8.56	26.63	34.63	77.75	438
52" 2 SECTIONS (1 FRIDGE/1 FREEZER)	SOLID	PRF-24-241AS	2/6	115	R:1/4 F:1/2	R:6.4 F:11.1	R:23.1 F:23.1	52	33	78.5	701

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

P SERIES

Stainless steel breakers

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Built-in adjustable humidity control

Anti-microbial door handles

Door locks standard

Solid doors only (optional on glass door models)

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 chrome-plated wire shelves

per section

Removable access panel

for ease of service and maintenance

Temperature range from 80-180° F



**MAXIMUM RESISTANCE TO WEAR AND TEAR
WITH STAINLESS STEEL BREAKER CAPS AND DOOR LINERS**

**MODULAR INTERIOR GIVES MAXIMUM FLEXIBILITY
FOR SHELF AND SLIDE COMBINATIONS**

3 YEAR PARTS AND LABOR WARRANTY



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18",
or two 12x20"

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

CONFIGURATIONS

- Reach-in
- Pass-thru
- Roll-in / Roll-thru / Extra-tall

Spec Line Warming Cabinets



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AGENCY CERTIFICATIONS



AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits
- Glass door locks
- Stainless steel shelves
- Kick plate

AVAILABLE OPTIONS

- Left hand hinge doors

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

P SERIES

WARMING CABINETS - REACH IN

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	WATTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PH1-1S	1/3	208-240	1500	6.3	21.5	26.50	35	77.75	320
	HALF SOLID	PH1-1HS	2/3	208-240	1500	6.3	21.5	26.50	35	77.75	320
	GLASS	PH1-1BG	1/3	208-240	1500	6.3	21.5	26.50	33.38	77.75	320
	HALF GLASS	PH1-1BHG	2/3	208-240	1500	6.3	21.5	26.50	33.38	77.75	320
52" 2 SECTIONS	SOLID	PH2-1S	4/6	208-240	1500	13	46.5	52.13	35	77.75	440
	HALF SOLID	PH2-1HS	2/6	208-240	1500	13	46.5	52.13	35	77.75	590
	GLASS	PH2-1BG	2/6	208-240	1500	13	46.5	52.13	33.38	77.75	440
	HALF GLASS	PH2-1BHG	4/6	208-240	1500	13	46.5	52.13	33.38	77.75	440

*Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.*



Spec Line Warming Cabinets

WARMING CABINETS - PASS-THRU

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	WATTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PH1-1S-PT	2/3	208-240	1500	6.3	21.5	26.50	38.38	77.75	320
	HALF SOLID	PH1-1HS-PT	1/3	208-240	1500	6.3	21.5	26.50	38.38	77.75	320
	GLASS	PH1-1BG-PT	1/3	208-240	1500	6.3	21.5	26.50	35.88	77.75	320
	HALF GLASS	PH1-1BHG-PT	2/3	208-240	1500	6.3	21.5	26.50	35.88	77.75	320
52" 2 SECTIONS	SOLID	PH2-1S-PT	2/6	208-240	1500	13	46.5	52.13	38.38	77.75	440
	HALF SOLID	PH2-1HS-PT	2/6	208-240	1500	13	46.5	52.13	38.38	77.75	440
	GLASS	PH2-1BG-PT	2/6	208-240	1500	13	46.5	52.13	35.88	77.75	590
	HALF GLASS	PH2-1BHG-PT	2/6	208-240	1500	13	46.5	52.13	35.88	77.75	590

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

WARMING CABINETS - ROLL-THRU

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	WATTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5"	SOLID	PHI1-1S-PT	2	208-240	1500	6.3	33.6	36.50	36.13	84	325
	SOLID	PHI1-2S-PT	4	208-240	1500	6.3	36.2	36.50	40.63	84.25	325
69"	SOLID	PHI2-1S-PT	4	208-240	1500	13	67.2	68.88	36.13	84	540
	SOLID	PHI2-2S-PT	4	208-240	1500	13	72.4	68.13	40.63	84.25	540

Depth measurement includes handles.

Cross-Temp™ Series

NEW

Easily converts from refrigerator to freezer
exclusive Beverage-Air Cross-Temp™ technology

Temperature range of -15 to 40° F

Modulates coil temp to achieve desired set point
while achieving maximum energy efficiency

Single cabinet configurable to all menu initiatives

Intuitive compressor
adjusts for optimal effectiveness in high-use situations

Quicker pull-down
for both air and product temperatures

Improved product stability

Smart-defrost

Expansion valve

Rapid-recovery after defrost
consistent product temperature and ensures food quality

Door locks standard
Solid doors only (optional on glass door models)

**Featuring environmentally friendly
energy efficient R290 refrigerant**



**EASILY CONVERTS FROM
REFRIGERATOR TO FREEZER**

**VARIABLE SPEED COMPRESSOR TECHNOLOGY
ACHIEVES 30% MORE ENERGY EFFICIENCY
COMPARED TO A SINGLE-SPEED**



EASY-TO-USE CONTROLLER
to quickly adjust set points




VARIABLE SPEED SYSTEM
modulates coil temp

AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)

AGENCY CERTIFICATIONS



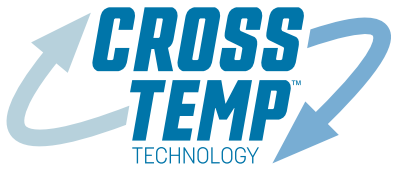

Easily converts from refrigerator to freezer
with Beverage-Air's exclusive Cross-Temp™ technology

Convertible Refrigeration



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters (single section only)
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors



Cross-Temp™ Series

1 SECTION & COMPRESSOR

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -10° TO 38°F

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	CT1HC-1S	1/3	115	4/5	8	23.1	26	33.63	78.5	326
	HALF SOLID	CT1HC-1HS	2/3								324
	GLASS	CT1HC-1G	1/3	115	4/5	8	23.1				429
	HALF GLASS	CT1HC-1HG	2/3								356

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.


2 SECTIONS & COMPRESSORS

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -15° TO 38°F


MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 SECTIONS (STACKED)	HALF SOLID	CT12-12HC-1HS	2/4	115	1: 1/3 2: 1/3	1: 5.8 2: 5.8	1: 9 2: 9	26.63	34.63	77.75	438

Depth measurement includes handles.


For total height, add 6 inches for your mounting choice.

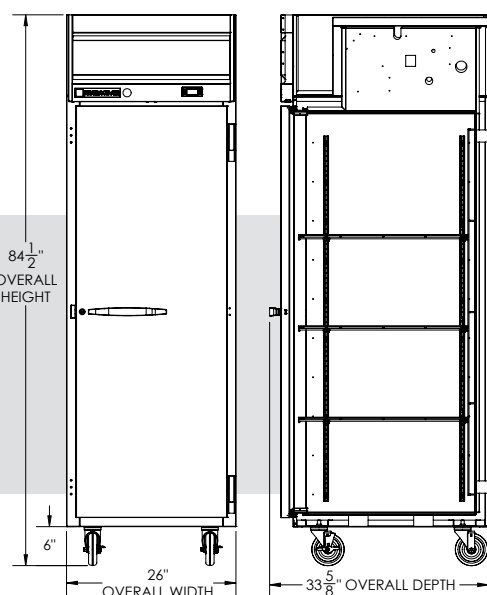

CT1HC

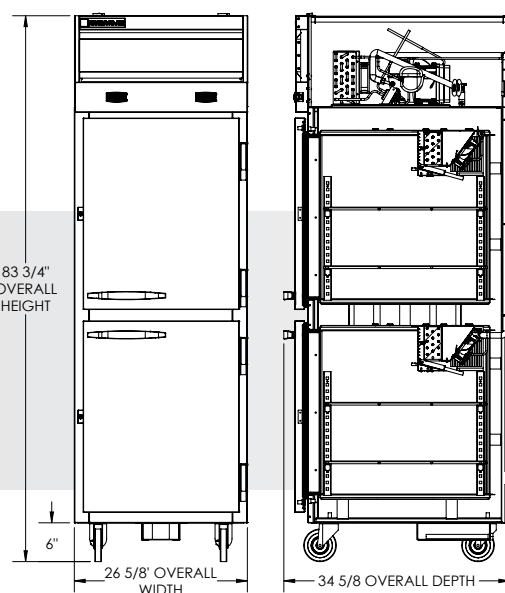

CT12-12HC-1HS

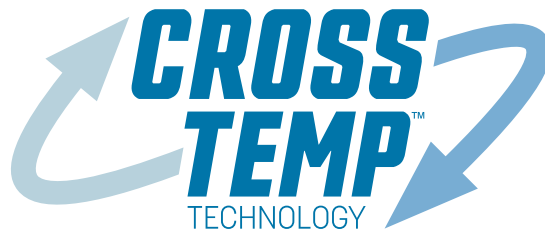

WHAT IS CROSS-TEMP™ TECHNOLOGY?

New from Beverage-Air, Cross-Temp™ technology allows the user to easily switch the unit back and forth from refrigerator to freezer as needed, with a range of -15° to 40°F.

THE PURPOSE CROSS-TEMP™

Simply put, Cross-Temp technology lets the user get the most flexibility from the unit, by letting them switch from fridge to freezer as their menus change with the seasons and initiatives, including ice-cream storage.

IS CROSS-TEMP ENERGY EFFICIENT?

The Cross-Temp™ units are intuitive and self-adjust for optimal effectiveness based on usage. Even in high-usage situations, Cross-Temp units adjust to maintain maximum energy efficiency.

HOW LONG DOES THE CONVERSION TAKE?

On average, a Cross-Temp unit can convert from refrigerator to freezer or vice versa, in under an hour. (Conditions and results will vary)



BLAST CHILLERS/FREEZERS

Compact construction

Electronic control board display

Custom chill/freeze cycles

Core temperature probe

Manual defrost

**Insulation is CFC and HCFC free,
high density polyurethane**

R404A refrigeration

Self-contained refrigeration



3 YEAR PARTS AND LABOR / ADDITIONAL 2 YEAR COMPRESSOR PART WARRANTY
AUTOMATIC PRODUCT STORING AT END OF CYCLE
UP TO 99 CUSTOM PROGRAMMABLE CYCLES



CORE PROBE
measures product temperature



ELECTRONIC CONTROL DISPLAY
intuitive programmable display

EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AGENCY CERTIFICATIONS



BLAST CHILLER/FREEZERS

MODEL WIDTH	MODEL #	VOLTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	PAN CAPACITY	CHILLING CYCLE	CHILLING CAPACITY
22"	CF031AG	115-120	9.9	7.3	22.05	27.6	20.47	104	3	194° to 37° F (90 minutes) 194° to 0° F (240 minutes)	17.6 lbs 11 lbs

Depth measurement includes handles.
Height measurement includes mounting height.

BLAST CHILLER/FREEZERS

MODEL WIDTH	MODEL #	VOLTS	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	PAN CAPACITY	CHILLING CYCLE	CHILLING CAPACITY
31"	BF051AG	230	6.7	13.9	31.1	27.56	33	304	5	194° to 37° F (90 minutes) 194° to 0° F (240 minutes)	40 lbs 26 lbs

Self-closing doors
with still position at 100 degrees

Ergonomic handles

6" casters standard

Depth measurement includes handles.
Height measurement includes mounting height.

WHAT IS BLAST CHILLING AND FREEZING?

Blast Chilling extracts the heat out of food, rapidly lowering the temperature. Department of Health guidelines require that all food temperatures be reduced from 150°F to 38°F degrees within a 90 minute period to keep food out of the "danger zone" of 145°F to 46°F, where bacteria multiplies fast.

Blast freezing rapidly lowers food temperatures from 150°F to 0°F vs. chilling temperatures above.

WHAT IS SOFT CHILL?

The Soft Chill cycle is ideal for the rapid, but gentle chilling of any dish (i.e., rice, pasta, fish, and fruit). This cycle brings the temperature of the food down while maintaining positive air temperatures of 37°F or above. This prevents ice crystals from forming that can damage the structure of delicate foods and allows for delicate foods to keep their brilliant colors.

WHAT IS HARD CHILL?

The Hard Chill cycle is ideal for chilling "standard products" such as cooked meat, lasagna, and individually portioned meals.

BENEFITS OF BLAST CHILLING

- Always serve fresh, top quality products
- Color, texture, and nutritional value are locked in
- The fast cooling process of blast chilling dramatically reduces bacteria reproduction, minimizing food spoilage
- Delicate foods like rice, pasta, fish, and fruit are protected Kitchen Efficiency – Saves Time & Money
- Allows advance food prep by preparing larger batches that can be refrigerated or frozen for later use
- Can enhance profits by increasing product capacity and reducing food waste
- Allows left over food from serving line to be quickly and safely chilled for later use
- Use Blast Chiller/Freezers on raw or cooked food

WILLIAMS BLAST CHILLERS

Polished stainless steel front, sides, and door maintain

an attractive appearance after years of heavy use

Stainless steel interior

Self-closing door

Easy-to-replace balloon gasket

prevents cold air from escaping

Door heater to prevent condensation

from forming on the cabinet front

Unique 1-2-3 microprocessor control panel initiates blast cycles

in three simple steps

Built-in alarms

Temperature probes or a digital timer

can control the chilling process

Programmable with two preset chilling times

for specific food products



DOOR HEATER IS PROVIDED AS STANDARD TO PREVENT CONDENSATION FROM FORMING ON THE CABINET FRONT

STAINLESS STEEL EXTERIOR AND INTERIOR TO MAINTAIN AN ATTRACTIVE APPEARANCE AFTER YEARS OF HEAVY USE



FRONT BREATHING
on reach-in and undercounter models



1-2-3 MICROPROCESSOR
control panel

AVAILABLE DOORS

- Solid

AGENCY CERTIFICATIONS



BLAST CHILLER/FREEZERS

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CHILLING CYCLE	CHILLING CAPACITY
28"	WBC35	1/5	208-230	3/4	7	35	28	32	35	275	160° to 38° F (90 minutes)	35 lbs
35.5"	WBC75	1/12	208	1 1/2	15	75	35.5	36	77.5	595	160° to 38° F (90 minutes)	75 lbs
43"	WBC110	1/12	208-230	1 1/2	8.6	110	43.38	40.63	81	747	160° to 38° F (90 minutes)	110 lbs

*Depth measurement includes handles.
Height measurement includes mounting height.*



EXTERIOR FINISHES

- Stainless steel


INTERIOR FINISHES

- Stainless steel

Spec Line Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	P Series Flat Shelving	403-507D
All Epoxy Coated Shelves	RI18-HS/HG	403-719C
Shelf Clip	P Series	403-077A-A
Epoxy Coated Wire Shelf	Cross-Temp Flat Shelving 1 Door Unit	403-889D-01
S/S Shelves	Cross-Temp Flat Shelving 1 Door Unit	403-889D-04
Shelf Clip	Any Cross-Temp Unit	403-169A
MOUNTING		
6" Caster	P Series (set of four)	61C01-001A
3" Caster	P Series (set of four)	61C01-013A
3.2" Casters	BF051AG	920596
6" Seismic/Flanged Legs	P Series (set of four)	00C31-055A
6" Caster	Any Cross-Temp Unit (set of four)	61C01-001A
3" Caster	Any Cross-Temp Unit (set of four)	61C01-013A
6" Black Leg	Any Cross-Temp Unit (set of four)	58B02S001A
6" Seismic/Flanged Legs	Any Cross-Temp Unit (set of four)	00C31-055A
ADDITIONAL ACCESSORIES		
Door Lock	P Series, Cross-Temp Series - Glass Doors (per door)	61C11S032A
TRAY SLIDE KITS		
TYPE "A" STANDARD & EXTRA WIDE UNITS		
1 tray slide set for: one 18x26" pan, or two 14x18" pans	P-Series, Cross-Temp Series	10601211S
TYPE "A/C" STANDARD & EXTRA WIDE UNITS		
1 tray slide set for: one 18x26" pan, or two 14x18" pans, or two 12x20" pans	P-Series, Cross-Temp Series	10601201S
KIT #4 EPOXY COATED WIRE ROD TRAY SLIDE		
19 SETS PER 1/2 SECTION	Cross-Temp Series	61C31-251A-01 (2)

P-Series Schematics

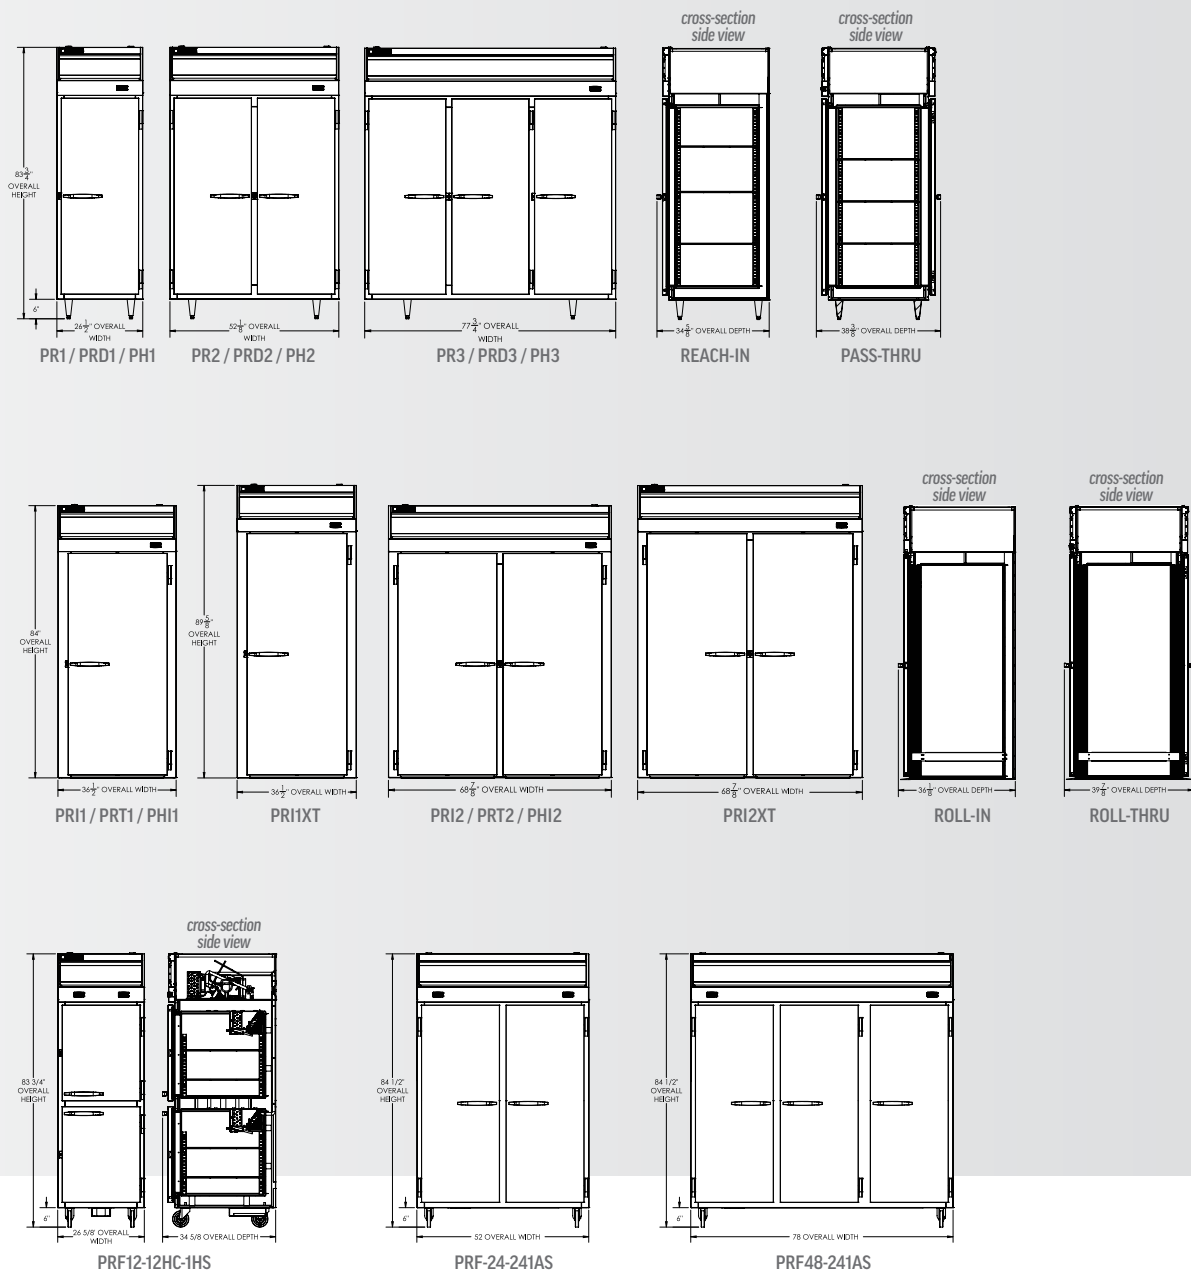





GLASS DOOR MERCHANDISERS

CONSISTENT COOLING POWER WITH WELL LIT PRODUCT DISPLAY

MARKETEER®

Double pane, lowE argon-filled glass doors

LED lighting

creates dynamic product presentation

Electronic temperature control

Energy efficient and environmentally friendly

R290 & R600 refrigerant

**DOE 2017 compliant
& Energy Star 4.0 rated**

Field-reversible doors

(hinge kit required)

Self-closing hinged doors

with mechanical locks, standard

**1 & 2 door models available in
Black or White finish options**

Sliding glass doors available

on select units



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

ENERGY STAR 4.0 RATED

UNIQUE SIZING OPTIONS



MECHANICAL LOCKS
standard on all hinged units



BUILT-IN LED LIGHTS
for dynamic product presentation

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS



Refrigerators

REFRIGERATORS

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
19" 1 DOOR	HINGED	MT08-1H6B	1/5	115	1/8	1.8	5.98	18.88	20.63	71.38	189	BLACK
		MT08-1H6W										WHITE
25" 1 DOOR	HINGED	MT10-1B	1/3	115	1/6	3.2	7.28	24.88	22.5	54.38	171	BLACK
		MT10-1W										WHITE
	HINGED	MT12-1B	1/4	115	1/6	4.1	8.77	24.88	22.81	63.63	210.32	BLACK
		MT12-1W										WHITE
30" 1 DOOR	HINGED	MT23-1B	1/5	115	1/3	7	14.97	29.56	26.13	78.63	246.91	BLACK
		MT23-1W										WHITE
47" 2 DOORS	HINGED	MT49-1B	2/10	115	1/2	8.3	30.55	47.13	30.13	79	441.8	BLACK
		MT49-1W										WHITE
	SLIDING	MT49-1-SDB	2/10	115	1/2	8.3	29.41	47.13	30.13	78.63	441.8	BLACK
		MT49-1-SDW										WHITE
54" 2 DOORS	HINGED	MT53-1B	2/10	115	1/2	8.3	31.41	54.25	29.38	79	483.91	BLACK
		MT53-1W										WHITE
	SLIDING	MT53-1-SDB	2/10	115	1/2	8.7	34.98	54.25	29.38	78.63	483.91	BLACK
		MT53-1-SDW										WHITE

Depth measurement includes handles.

EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Extra shelves & clips
- 3" Casters
- Visislide shelving kit



MARKETMAX®

Triple pane, lowE argon-filled glass doors

Field reversible (refrigerator only)

Self-closing doors

120° stay open feature

LED lighting

creates dynamic product presentation

Brightly lit sign panel

Custom door decals and signage available

Full electronic temperature control

Energy efficient and environmentally friendly R290 refrigerant

5 epoxy coated wire shelves per section

1, 2 & 3 door model options available

Sliding glass doors available on select units



ENERGY EFFICIENT R290/R600A PROVIDES SOLUTION FOR ALL ENVIRONMENTAL CONCERNS

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

MADE IN THE USA



FULL ELECTRONIC CONTROL
with easy to read digital display



BRIGHTLY LIT HEADER PANEL
to grab attention and increase sales

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Black
- White
- Stainless steel

INTERIOR FINISHES

- Black
- White
- Stainless steel

AVAILABLE ACCESSORIES

- Electronic locks
- Dual-temp models
- Wine models
- Door locks
- Gravity-Flo kits
- Price-tag molding
- Custom graphics

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available
- Header signs

MOUNTING OPTIONS

- 6" casters
- 6" legs
- 3" casters

MARKETMAX®

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
27" 1 DOOR	HINGED	MMR23HC-1-B	1/5	115	1/4	3	23.1	27	33.63	78	358	BLACK
		MMR23HC-1-W										WHITE
30" 1 DOOR	HINGED	MMR27HC-1-B	1/5	115	1/4	3	25.88	30	33.63	78	382	BLACK
		MMR27HC-1-W										WHITE
43.5" 2 DOORS	SLIDING	MMR38HC-1-B	2/10	115	1/3	5	35.37	43 1/2"	32.25	78	478	BLACK
		MMR38HC-1-W										WHITE
47" 2 DOORS	HINGED	MMR44HC-1-B	2/10	115	1/3	5	40.2	47	33.63	78	544	BLACK
		MMR44HC-1-W										WHITE
52" 2 DOORS	SLIDING	MMR45HC-1-B	2/10	115	1/3	5	44	52	32.25	78	555	BLACK
		MMR45HC-1-W										WHITE
	HINGED	MMR49HC-1-B	2/10	115	1/3	5	46.15	52	33.63	78	584	BLACK
		MMR49HC-1-W										WHITE
75" 3 DOORS	SLIDING	MMR66HC-1-B	3/15	115	1/2	6.2	68.93	75	32.25	78	726	BLACK
		MMR66HC-1-W										WHITE
	HINGED	MMR72HC-1-B	3/15	115	1/2	6.2	68.93	75	33.63	78	750	BLACK
		MMR72HC-1-W										WHITE

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO
MAINTAIN TEMPERATURE OF 0° TO -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
27" 1 DOOR	HINGED	MMF23HC-1-B	1/4	115	3/4	7.5	22.5	27	33.63	78	416	BLACK
		MMF23HC-1-W										WHITE
30" 1 DOOR	HINGED	MMF27HC-1-B	1/4	115	3/4	7.5	26.57	30	33.63	78	427	BLACK
		MMF27HC-1-W										WHITE
47" 2 DOORS	HINGED	MMF44HC-1-B	2/10	115	3/4	13.8	45	47	33.63	78	568	BLACK
		MMF44HC-1-W										WHITE
52" 2 DOORS	HINGED	MMF49HC-1-B	2/10	115	3/4	11	46.2	52	33.63	78	596	BLACK
		MMF49HC-1-W										WHITE
75" 3 DOORS	HINGED	MMF72-5-B-LED	3/15	115/208-230*	(2) 1/2	16	72	75	33.63	78	971	BLACK
		MMF72-5-W-LED										WHITE

*Freezers powered by 115/208-230 volts are designed for field wiring
(requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
52" 2 DOORS	HINGED	MMRF49-1-BW-A-LED	2/10	115	R: 3/4 F: 1/2	R: 10.9 F: 5.8	R: 18.56 F: 18.56	52	33.63	78	696	BLACK
		MMRF49-1-WW-A-LED										WHITE
75" 3 DOORS	HINGED	MMRF72-1-BW-A-LED	3/15	115/208-230*	R: 3/4 F: 1/2	R: 10.9 F: 8.8	R: 17.75 F: 37.92	75	33.63	78	942	BLACK
		MMRF72-1-WW-A-LED										WHITE

*Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

**All options for MarketMax Dual Temps are specified within
the model number using the designated codes described below.**

MMRF49 EXAMPLE

Customer orders a MMRF49-1-BW-A

- Exterior will be black. Interior of the freezer AND the refrigerator will be white. (BW)
- The freezer will be on the left with left hand hinged door. The refrigerator will be on the right with right hand hinged door. (A)

MMRF49 - COOLER CONFIGURATIONS	
SINGLE DOOR ON LEFT - SINGLE DOOR ON RIGHT	
A	Freezer on the Left with Left Hand Hinged Door, Refrigerator on the Right with Right Hand Hinged Door
B	Refrigerator on the Left with Left Hand Hinged Door, Freezer on the Right with Right Hand Hinged Door
C	Freezer on the Left with Left Hand Hinged Door, Refrigerator on the Right with Left Hand Hinged Door
D	Refrigerator on the Left with Left Hand Hinged Door, Freezer on the Right with Left Hand Hinged Door
E	Freezer on the Left with Right Hand Hinged Door, Refrigerator on the Right with Right Hand Hinged Door
F	Refrigerator on the Left with Right Hand Hinged Door, Freezer on the Right with Right Hand Hinged Door

COLOR COMBINATIONS

(BOTH CABINET INTERIORS BEING THE SAME COLOR)

BW	Black Exterior / White Interior
WW	White Exterior / White Interior
SW	Stainless Exterior / White Interior
BB	Black Exterior / Black Interior
BS	Black Exterior / Stainless Interior
WB	White Exterior / Black Interior
WS	White Exterior / Stainless Interior
SS	Stainless Exterior / Stainless Interior
SB	Stainless Exterior / Black Interior

MMRF72 EXAMPLE

Customer orders a MMRF72-1-WW-A

- Exterior will be white. Interior of the freezer AND the refrigerators will also be white. (WW)
- The freezer will be on the left with left hand hinged door. The 2 door refrigerator will be on the right with right hand hinged doors. (A)

MMRF72 - COOLER CONFIGURATIONS	
SINGLE DOOR ON LEFT - TWO DOORS ON RIGHT	
A	Freezer on the Left with Left Hand Hinged Door, 2 Door Refrigerator on the Right with Right Hand Hinged Doors
B	Refrigerator on the Left with Left Hand Hinged Door, 2 Door Freezer on the Right with Right Hand Hinged Doors
C	Freezer on the Left with Left Hand Hinged Door, 2 Door Refrigerator on the Right with Left Hand Hinged Doors
D	Refrigerator on the Left with Left Hand Hinged Door, 2 Door Freezer on the Right with Left Hand Hinged Doors
E	Freezer on the Left with Right Hand Hinged Door, 2 Door Refrigerator on the Right with Right Hand Hinged Doors
F	Refrigerator on the Left with Right Hand Hinged Door, 2 Door Freezer on the Right with Right Hand Hinged Doors
G	Freezer on the Left with Left Hand Hinged Door, 2 Door Refrigerator on the Right with Left/Right Hand Hinged Doors
H	Refrigerator on the Left with Left Hand Hinged Door, 2 Door Freezer on the Right with Left/Right Hand Hinged Doors

TWO DOORS ON LEFT - SINGLE DOOR ON RIGHT

J	2 Door Refrigerator on the Left with Left/Right Hand Hinged Doors, Single Door Freezer on the Right with Right Hand Hinged Door
K	2 Door Freezer on the Left with Left/Right Hand Hinged Doors, Single Door Refrigerator on the Right with Right Hand Hinged Door
L	2 Door Freezer on the Left with Left Hand Hinged Doors, Single Door Refrigerator on the Right with Left Hand Hinged Door
M	2 Door Refrigerator on the Left with Left Hand Hinged Doors, Single Door Freezer on the Right with Left Hand Hinged Door
N	2 Door Freezer on the Left with Right Hand Hinged Doors, Single Door Refrigerator on the Right with Right Hand Hinged Door
P	2 Door Refrigerator on the Left with Right Hand Hinged Doors, Single Door Freezer on the Right with Right Hand Hinged Door
Q	2 Door Refrigerator on the Left with Left Hand Hinged Doors, Single Door Freezer on the Right with Right Hand Hinged Door
R	2 Door Freezer on the Left with Left Hand Hinged Doors, Single Door Refrigerator on the Right with Right Hand Hinged Door

COUNTERTOPS



CT96

Double pane, tempered glass door with locks

Heavy-duty black textured steel exterior
with black plastic door frames

Heavy-duty white epoxy coated steel interior

LED lighting
creates dynamic product presentation

3 epoxy coated shelves
top 2 shelves are adjustable

Full electronic temperature control with display

Refrigeration system uses R600a refrigerant
to comply with all environmental concerns

System is serviceable from the rear

Custom graphics available

1 year parts & labor warranty with an additional 4 year compressor warranty

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 35-41°F.

AGENCY CERTIFICATIONS



MODEL	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	EXTERIOR COLOR	INTERIOR COLOR
CT96	CT96HC-1-B	1/3	115	1/5	1.3	5.9	21.38	25.5	37.5	112	BLACK	WHITE
	CT96HC-1-S-MR										STAINLESS	MIRROR

*Depth measurement includes handles.
Height measurement includes mounting height.*

ENERGY EFFICIENT R290/R600A PROVIDES SOLUTION FOR ALL ENVIRONMENTAL CONCERNS

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

MADE IN THE USA



LED LIGHTING
for dynamic product presentation
(CT96 & CF3 only)



CUSTOM GRAPHICS AVAILABLE
for brand or product promotion
(CT96 & CF3 only)

Refrigerators & Freezers



CF3

Triple pane, tempered glass door

Pre-painted, steel interior and exterior
for easy cleaning

LED lighting
creates dynamic product presentation

2 shelves standard
one full & one half shelf

Custom graphics available

AGENCY CERTIFICATIONS



2" leveling legs
with up to 1" for leveling of the unit

Refrigeration system
uses R290 refrigerant
to comply with all environmental concerns

3 year parts & labor warranty with an
additional 2 year compressor warranty



UCF20

Glass door provides clear
merchandising of ice cream

Oversized refrigeration system holds
-15°F to -10°F product temperature

Full electronic control
for enhanced defrost

AGENCY CERTIFICATIONS



Forced air design does not require
unit to undergo manual defrost
which is a major advantage to
comparable cold wall freezers

20" footprint for countertop
or undercounter applications

FREEZERS

MODEL	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR	OPERATING TEMPERATURE
CF3	CF3HC-1-W	1/2	115	1/4	4	4	23.75	22.5	28.5	120	WHITE	-10° F
UCF20	UCF20HC-25-15	1/2	115	1/4	2.5	2.34	20	24.5	31.13	117	STAINLESS	-10 to -15° F

Depth measurement includes handles.

DIPPING CABINETS

Galvanized metal cabinet

with powder coated painted surface

Easy-to-clean interior

Full electronic control

Sliding glass lids are LowE tempered

Lock and keys standard

2" Heavy-duty casters

allow easy and fast movement

Drain plug for easy cleaning

Lexan sneeze guard

Heavy-duty PVC coated wire support racks

allows containers to be positioned on top level for optimal storage

Each rack designed to hold

multiple 3-gallon ice cream containers

R290 refrigerant provides low energy consumption

and is environmentally friendly



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

**R290 REFRIGERANT PROVIDES LOW ENERGY CONSUMPTION
AND IS ENVIRONMENTALLY FRIENDLY**



LID LOCKS STANDARD
for loss prevention



LED LIGHTING
for dynamic product presentation

ACCESS OPTIONS

- Glass lids

AGENCY CERTIFICATIONS



DIPPING CABINETS

COLD WALL SYSTEM MAINTAINS TEMPERATURES OF -10 to 8°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
50"	BDC-HC-8	120	1/3	5.4	15.2	50.4	26.4	52	225	White
68"	BDC-HC-12	120	1/3	5.2	20.9	68.2	26.4	52	280	White

*Depth measurement includes handles.
For total height, add 2 inches for the caster height.*

BDC-HC-8 Capacity

Top rack: eight 3-gallon ice cream containers
Bottom rack: six 3-gallon ice cream containers

BDC-HC-12 Capacity

Top rack: twelve 3-gallon ice cream containers
Bottom rack: ten 3-gallon ice cream containers

EXTERIOR FINISHES

- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Custom graphics
- 2 Ring tub



NOVELTY CASES

White coated steel exterior

White powder coated surface interior

R290 refrigerant provides low energy consumption
and is environmentally friendly

LED lighting

Adjustable thermostat

Operating temperature of -10°F

Angle top design with LowE tempered glass lids

Lids are easily removable

Lid lock & keys

Round exterior edges

Integrated tag molding

2" heavy duty casters

Drain plug for easy cleaning

5 Removable baskets



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

**R290 REFRIGERANT PROVIDES LOW ENERGY CONSUMPTION
AND IS ENVIRONMENTALLY FRIENDLY**



LID LOCKS STANDARD
for loss prevention



LED LIGHTING
for dynamic product presentation

ACCESS OPTIONS

- Glass lids

AGENCY CERTIFICATIONS



NOVELTY CASES

MAINTAINS TEMPERATURES OF -10°F.

MODEL WIDTH	MODEL #	LIDS/ BASKETS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
28"	NC28HC-1-W	2/2	115	1/5	3	4.31	28.1	26.4	32.2	144	White
34"	NC34HC-1-W	2/3	115	1/4	3	5.67	34.1	26.4	32.2	155	White
43"	NC43HC-1-W	2/4	115	1/4	3.5	7.63	42.7	26.4	32.2	180	White
51"	NC51HC-1-W	2/5	115	1/4	3.5	9.43	50.6	26.4	32.2	200	White
60"	NC60HC-1-W	2/6	115	1/3	4	11.66	60.4	26.4	34.2	224	White
68"	NC68HC-1-W	2/7	115	1/3	4	21	68.3	26.4	34.2	251	White

*Depth measurement includes handles.
For total height, add 2 inches for the caster height.*



EXTERIOR FINISHES

- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Custom graphics
- Dip well



Glass Door Merchandiser Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	MMR/MMF23	403-900D-01
Epoxy Coated Wire Shelf	MMR/MMF27	403-871D-01
Epoxy Coated Wire Shelf	MMR/MMF49	403-873D-01
Epoxy Coated Wire Shelf	MMR/MMF72	403-874D-01
Epoxy Coated Wire Shelf, Black	MMR/MMF23	403-900D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF27	403-871D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF49	403-873D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF72	403-874D-03
Epoxy Coated Wire Shelf	MM14	403-500D
Wire Shelf	CT96/CTF96 (New Model)	CT9652
CURVED Wine Rack (White)	MMR23	403-905D-01
CURVED Wine Rack (Black)	MMR23	403-905D-02
CURVED Wine Rack (White)	MMR27	403-906D-01
CURVED Wine Rack (Black)	MMR27	403-906D-02
CURVED Wine Rack (White)	MMR49	403-907D-01
CURVED Wine Rack (Black)	MMR49	403-907D-02
CURVED Wine Rack (White)	MMR72	403-908D-01
CURVED Wine Rack (Black)	MMR72	403-908D-02
FLAT Wine Rack with bottle support (White)	MMR23	403-933D-01
FLAT Wine Rack with bottle support (Black)	MMR23	403-933D-02
FLAT Wine Rack with bottle support (White)	MMR27	403-934D-01
FLAT Wine Rack with bottle support (Black)	MMR27	403-934D-02
FLAT Wine Rack with bottle support (White)	MMR49/45	403-936D-01
FLAT Wine Rack with bottle support (Black)	MMR49/45	403-936D-02
FLAT Wine Rack with bottle support (White)	MMR72/66	403-937D-01
FLAT Wine Rack with bottle support (Black)	MMR72/66	403-937D-02
FLAT Chrome Wine Rack with bottle support	MMR23	403-928D-03
FLAT Chrome Wine Rack with bottle support	MMR27	403-929D-03
FLAT Chrome Wine Rack with bottle support	MMR49	403-930D-03
FLAT Chrome Wine Rack with bottle support	MMR72	403-931D-03
Shelf Clip	MMR/MMF Series	403-169A
Novelty Basket (White)	MMF23	403-938D-01
Novelty Basket (Black)	MMF23	403-938D-02
Novelty Basket (White)	MMF27	403-939D-01
Novelty Basket (Black)	MMF27	403-939D-02
Novelty Basket (White)	MMF49	403-940D-01
Novelty Basket (Black)	MMF49	403-940D-02
Novelty Basket (White)	MMF72	403-941D-01
Novelty Basket (Black)	MMF72	403-941D-02
Shelf Clip	CT96	CT9651
Shelf Clip	CTR3	80FA39
Gravity Flo Kits	MM14 (ONE KIT PER UNIT)	61C31-187A-01
Gravity Flo Kits	MM23	61C31-253D-01
Gravity Flo Kits	MM27	61C31-193A-01
Gravity Flo Kits	MM49/72	61C31-199A-01
MOUNTING		
3" Caster	MM14	61C01-008A
6" Seismic/Flanged Legs	MMR/MMF Series (set of four)	00C31-055A

DESCRIPTION	UNIT(S)	PART NUMBER
SIGNAGE		
Price Tag Molding (per shelf)	MMR/F 23, 45/49, 66/72	61A32-082D-01
Price Tag Molding (per shelf)	MMR/F 27	61A32-090D-02
Brushed sign 26-3/8" x 8.5"	MMR23/MMF23	409-505B-01
Brushed sign 29 1/8" x 8.5"	MMR27/MMF27	409-505B-02
Brushed sign 46.13" W x 8.5"	MMR44/MMF44	409-505B-04
Brushed sign 51 1/8" x 8.5"	MMR/MMF49	409-505B-05
Brushed sign 74 1/4" x 8.5"	MMR/MMF72	409-505B-06
Flat Black Sign	MMR23/MMF23	409-488B-01
Flat Black Sign	MMR/MMF27	409-488B-02
Flat Black Sign	MMR/MMF49	409-488B-05
Flat Black Sign	MMR/MMF72	409-488B-06
Flat White Sign	MMR23/MMF23	409-418C-053
Flat White Sign	MMR/MMF27	409-419C-140
Flat White Sign	MMR/MMF49	409-422C-109
Flat White Sign	MMR/MMF72	409-423C-061
Self-Serve Sign	MMR23/MMF23	409-418C-054
Self-Serve Sign	MMR/MMF27	409-419C-141
Self-Serve Sign	MMR/MMF49/MMRF49	409-422C-110
Self-Serve Sign	MMR/MMF72/MMRF72	409-423C-062
Fresh Foods Sign	MMR23/MMF23	409-418C-056
Fresh Foods Sign	MMR/MMF27	409-419C-143
Fresh Foods Sign	MMR/MMF49	409-422C-112
Fresh Foods Sign	MMR/MMF72	409-423C-064
Cold Drinks Sign	MMR23	409-418C-055
Cold Drinks Sign	MMR27	409-419C-142
Cold Drinks Sign	MMR49	409-422C-111
Cold Drinks Sign	MMR72	409-423C-063
Chilled Wine Sign - Brown	MMR23	409-418C-061
Chilled Wine Sign - Brown	MMR27	409-419C-146
Chilled Wine Sign - Brown	MMR49	409-422C-117
Chilled Wine Sign - Brown	MMR72	409-423C-066
Chilled Wine Sign - Sepia	MMR23	409-418C-062
Chilled Wine Sign - Sepia	MMR27	409-419C-147
Chilled Wine Sign - Sepia	MMR49	409-422C-118
Chilled Wine Sign - Sepia	MMR72	409-423C-067
Chilled Wine Sign - Curved	MMR23	409-418C-063
Chilled Wine Sign - Curved	MMR27	409-419C-148
Chilled Wine Sign - Curved	MMR49	409-422C-119
Chilled Wine Sign - Curved	MMR72	409-423C-068
Got Milk Sign	MMR27	409-419C-102
Got Milk Sign	MMR 45/49	409-422C-087
Got Milk Sign	MMR 66/72	409-423C-054
ADDITIONAL ACCESSORIES		
Door Lock	CT96	61C11S043A
Door Lock	CR5	61C11-040A





OPEN AIR MERCHANDISERS

EASY-ACCESS AND HIGH VISIBILITY PRODUCT DISPLAYS

BREEZE™

Exterior finish is a heavy-duty steel
with a durable, baked on black or white coating

Curved design with open front & side shield
to maximize product display

Interior is white coated steel

2 recessed interior lights
provide maximum product visibility

3 epoxy coated shelves

Modern grille is easy to remove
for cleaning or service

Gravity-Flo organizer

Holds unit temperature from 32°-40°F

**Certified for bottled beverage
& packaged foods**

Brightly lit sign panel



**3 YEAR PARTS & LABOR WARRANTY
WITH AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

UNIQUE SIZE SUITED FOR ENDCAPS AND SCHOOLS

CUSTOM GRAPHICS AVAILABLE



SIDE SHIELD
to maximize product display



GRAVITY FLO
organizer standard

AGENCY CERTIFICATIONS



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 32-38°F.

MODEL WIDTH	MODEL #	SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	COLOR
30"	BZ13-1-B	3	115	1/2	12	12.63	30	32.75	54.38	336	BLACK
	BZ13-1-W										WHITE



EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Black dividers
- Black shelves
- Roller kit
- Custom graphics and signage



VUEMAX™

Heavy duty steel exterior
with a durable paint finish

Glass sides enhance product visibility
from side viewpoints

Foamed in place CFC-free polyurethane
insulation enhances the structural strength of the cabinet and increases energy efficiency

LED lighting
enhances product illumination
for maximum product visibility

Shelving display flexibility
Shelves can be installed in two positions

Full electronic temperature control
from 36° -40°F, with display

**Certified for bottled beverage
& packaged foods**

Night curtain

Stylish impact bumper



SIDE SHIELD
to maximize product display



CUSTOM GRAPHICS AVAILABLE
for brand or product promotion

AGENCY CERTIFICATIONS





REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
35"	VM7-1	3	120	1/3	7.5	9.58	34.8	31.7	59.3	433
	VM12-1	5	120	(2) 1/4	10	15.45	34.8	31.7	78.8	524
51.5"	VM18-1	5	120	(2) 1/3	16	23.87	51.5	31.7	78.8	652



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

**IDEAL FOR GOURMET SHOPS, DELICATESSENS,
CONVENIENCE STORES & BAKERIES**

EXTERIOR FINISHES

- Black
- White
- Grey

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Security Cover
- Bar/bag hooks
- Price tag molding
- Spring-loaded Product Dispensers
- Custom graphics available

MOUNTING OPTIONS

- 6" adjustable legs (standard)
- 5" casters

Open Air Merchandiser Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf, Black Dividers	BZ13	403-749D-01
Shelf Clip	BZ13	403-168A
MOUNTING		
2" Roller Kit	BZ13	61C01-010A
5" Caster	VM7/VM12/VM18 (set of four)	61C01-014D-01
MERCHANDISING ACCESSORIES		
Front Product Display	VM-7/12	183602102
Front Product Display	VM-18	183602101
Side Saddle Bag Assembly	VM-18	183110202
Side Saddle Bag Assembly	VM-7	183110203
Clearcool Curtain Assembly, Plastic Strips	VM-18	CLEARCOOL120
Clearcool Curtain Assembly, Plastic Strips	VM-12	CLEARCOOL77
Clearcool Curtain Assembly, Plastic Strips	VM-7	CLEARCOOL55
Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs	VM-7/12	WonderBar-ALPA-55/77 BLACK
Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs	VM-18	WonderBar-ALPA-99/120 BLACK
ADDITIONAL ACCESSORIES		
Locking Cage w/Lock	VM7	103304002-ASM
Locking Cage w/Lock	VM12	103304001-ASM
Locking Cage w/Lock	VM15	103304003-ASM
Locking Cage w/Lock	VM18	103304000-ASM
Base Kit	BZ13	807-838C







FOOD PREP TABLES

BACK BONE OF FOOD SERVICE WITH ALMOST LIMITLESS OPTIONS

SANDWICH PREP

Full electronic control

Reversible cutting boards

1/2" thick, 10" deep

Locking divider bars

Heavy-duty aluminum pan liner

easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Field reversible doors

with 120 degree stay-open feature

Two epoxy coated shelves

per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/6 size polycarbonate pans are included (excludes -A models)

Heavy duty insulated covers

protects products and eliminates sweating when closed

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY

MADE IN USA



PERFECT SEAL PAN LINER

ensures airflow under pans and protects bottom of cabinet from pan spills



CLEAR LIDS AVAILABLE

for optimized product display

ACCESS OPTIONS

- Doors
- Drawers
- Dual-sided

AGENCY CERTIFICATIONS



Food Prep Tables



EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Galvanized
- Stainless steel

AVAILABLE ACCESSORIES

- 12" crossbar
- Side/front crumb catchers
- Overshelf kits
- Composite cutting boards
- Bun tray rack
- Locks (for solid doors)

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

LID OPTIONS

- Clear lids
- Flat-hinged lids
- Lift-off lids
- See-thru lids

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

SANDWICH PREP

Standard Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC	1/2	115	1/6	2	6.91	27	32	39.38	202	(6) 1/6 size, (2) 1/9 size
	SPE27HC-B										(8) 1/6
32" 1 DOOR	SPE32HC-08	1/2	115	1/6	2	8.01	32	32	39.25	239	(8) 1/6 size
36" 2 DOORS	SPE36HC-08	2/4	115	1/6	2	10.01	36	32	39	250	(8) 1/6 size
	SPE36HC-10									252	(10) 1/6 size
48" 2 DOORS	SPE48HC-08	2/4	115	1/6	2.2	13.01	48	32	39.25	296	(8) 1/6 size
	SPE48HC-10									296	(10) 1/6 size
	SPE48HC-12									302	(12) 1/6 size
60" 2 DOORS	SPE60HC-08	2/4	115	1/3	5.4	16.02	60	32	39	346	(8) 1/6 size
	SPE60HC-10									348	(10) 1/6 size
	SPE60HC-12									342	(12) 1/6 size
	SPE60HC-16									360	(16) 1/6 size
72" 3 DOORS	SPE72HC-08	3/6	115	1/3	5.4	20.02	72	32	39	432	(8) 1/6 size
	SPE72HC-10									432	(10) 1/6 size
	SPE72HC-12									398	(12) 1/6 size
	SPE72HC-18									388	(18) 1/6 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

CONDIMENT STATIONS WITH SNEEZEGUARD

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPE27HC-SNZ	1/2	115	1/6	2	7.3	27	32	53	202	(6) 1/6 pans, (2) 1/9
48"	SPE48HC-12-SNZ	2/4	115	1/6	2.2	13.9	48	32	53.13	308	(12) 1/6 pans

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC	2	—	115	1/6	2	6.91	27	32	39.38	232	(6) 1/6 size & (2) 1/9 size
	SPED27HC-B	2	—								238	(8) 1/6 size
32"	SPED32HC-08-2	2	—	115	1/6	2	8.01	32	32	39.25	269	(8) 1/6 size
36"	SPED36HC-08-2	2	—	115	1/6	2	10.01	36	32	39	276	(8) 1/6 size
	SPED36HC-10-2	2	—								278	(10) 1/6 size
48"	SPED48HC-08-2	2	1/2	115	1/6	2.2	13.01	48	32	39.25	358	(8) 1/6 size
	SPED48HC-08-4	4	—								358	(8) 1/6 size
	SPED48HC-10-2	2	1/2	115	1/6	2.2	13.01	48	32	39.25	326	(10) 1/6 size
	SPED48HC-10-4	4	—								326	(10) 1/6 size
	SPED48HC-12-2	2	1/2	115	1/6	2.2	13.01	48	32	39.25	332	(12) 1/6 size
	SPED48HC-12-4	4	—								356	(12) 1/6 size
60"	SPED60HC-08-2	2	1/2	115	1/3	5.4	16.02	60	32	39	404	(8) 1/6 size
	SPED60HC-08-4	4	—								404	(8) 1/6 size
	SPED60HC-10-2	2	1/2	115	1/3	5.4	16.02	60	32	39	356	(10) 1/6 size
	SPED60HC-10-4	4	—								406	(10) 1/6 size
	SPED60HC-12-2	2	1/2	115	1/3	5.4	16.02	60	32	39	408	(12) 1/6 size
	SPED60HC-12-4	4	—								402	(12) 1/6 size
	SPED60HC-16-2	2	1/2	115	1/3	5.4	16.02	60	32	39	382	(16) 1/6 size
	SPED60HC-16-4	4	—								414	(16) 1/6 size
72"	SPED72HC-08-2	2	2/4	115	1/3	5.4	20.02	72	32	39.13	450	(8) 1/6 size
	SPED72HC-08-4	4	1/2								450	(8) 1/6 size
	SPED72HC-08-6	6	—								456	(8) 1/6 size
	SPED72HC-10-2	2	2/4	115	1/3	5.4	20.02	72	32	39.13	448	(10) 1/6 size
	SPED72HC-10-4	4	1/2								450	(10) 1/6 size
	SPED72HC-10-6	6	—								452	(10) 1/6 size
	SPED72HC-12-2	2	2/4	115	1/3	5.4	20.02	72	32	39.13	418	(12) 1/6 size
	SPED72HC-12-4	4	1/2								442	(12) 1/6 size
	SPED72HC-12-6	6	—								484	(12) 1/6 size
	SPED72HC-18-2	2	2/4	115	1/3	5.4	20.02	72	32	39.13	432	(18) 1/6 size
	SPED72HC-18-4	4	1/2								460	(18) 1/6 size
	SPED72HC-18-6	6	—								484	(18) 1/6 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

SANDWICH PREP

Clear Lid Standard Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-CL	1/2	115	1/6	2	6.91	27	32	44.75	202	(6) 1/6 size, (2) 1/9 size
	SPE27HC-B-CL										(8) 1/6
32" 1 DOOR	SPE32HC-08-CL	1/2	115	1/6	2	8.01	32	32	44.63	239	(8) 1/6 size
36" 2 DOORS	SPE36HC-08-CL	2/4	115	1/6	2	10.01	36	32	44.5	250	(8) 1/6 size
	SPE36HC-10-CL									252	(10) 1/6 size
48" 2 DOORS	SPE48HC-08-CL	2/4	115	1/6	2.2	13.01	48	32	44.5	296	(8) 1/6 size
	SPE48HC-10-CL									296	(10) 1/6 size
	SPE48HC-12-CL									302	(12) 1/6 size
60" 2 DOORS	SPE60HC-08-CL	2/4	115	1/3	5.4	16.02	60	32	44.5	346	(8) 1/6 size
	SPE60HC-10-CL									348	(10) 1/6 size
	SPE60HC-12-CL									342	(12) 1/6 size
	SPE60HC-16-CL									360	(16) 1/6 size
72" 3 DOORS	SPE72HC-08-CL	3/6	115	1/3	5.4	20.02	72	32	44.5	432	(8) 1/6 size
	SPE72HC-10-CL									432	(10) 1/6 size
	SPE72HC-12-CL									398	(12) 1/6 size
	SPE72HC-18-CL									388	(18) 1/6 size

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

CLEAR LIDS



DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-CL	2	—	115	1/6	2	6.91	27	32	44.75	232	(6) 1/6 size & (2) 1/9 size
	SPED27HC-B-CL	2	—								238	(8) 1/6 size
32"	SPED32HC-08-2-CL	2	—	115	1/6	2	8.01	32	32	44.63	269	(8) 1/6 size
36"	SPED36HC-08-2-CL	2	—	115	1/6	2	10.01	36	32	44.5	276	(8) 1/6 size
	SPED36HC-10-2-CL	2	—								278	(10) 1/6 size
48"	SPED48HC-08-2-CL	2	1/2	115	1/6	2.2	13.01	48	32	44.5	358	(8) 1/6 size
	SPED48HC-08-4-CL	4	—								358	(8) 1/6 size
	SPED48HC-10-2-CL	2	1/2	115	1/6	2.2	13.01	48	32	44.5	326	(10) 1/6 size
	SPED48HC-10-4-CL	4	—								326	(10) 1/6 size
	SPED48HC-12-2-CL	2	1/2	115	1/6	2.2	13.01	48	32	44.5	332	(12) 1/6 size
	SPED48HC-12-4-CL	4	—								356	(12) 1/6 size
60"	SPED60HC-08-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	404	(8) 1/6 size
	SPED60HC-08-4-CL	4	—								404	(8) 1/6 size
	SPED60HC-10-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	356	(10) 1/6 size
	SPED60HC-10-4-CL	4	—								406	(10) 1/6 size
	SPED60HC-12-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	408	(12) 1/6 size
	SPED60HC-12-4-CL	4	—								402	(12) 1/6 size
	SPED60HC-16-2-CL	2	1/2	115	1/3	5.4	16.02	60	32	44.5	382	(16) 1/6 size
	SPED60HC-16-4-CL	4	—								414	(16) 1/6 size
72"	SPED72HC-08-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	450	(8) 1/6 size
	SPED72HC-08-4-CL	4	1/2								450	(8) 1/6 size
	SPED72HC-08-6-CL	6	—								456	(8) 1/6 size
	SPED72HC-10-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	448	(10) 1/6 size
	SPED72HC-10-4-CL	4	1/2								450	(10) 1/6 size
	SPED72HC-10-6-CL	6	—								452	(10) 1/6 size
	SPED72HC-12-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	418	(12) 1/6 size
	SPED72HC-12-4-CL	4	1/2								442	(12) 1/6 size
	SPED72HC-12-6-CL	6	—								484	(12) 1/6 size
	SPED72HC-18-2-CL	2	2/4	115	1/3	5.4	20.02	72	32	44.5	432	(18) 1/6 size
	SPED72HC-18-4-CL	4	1/2								460	(18) 1/6 size
	SPED72HC-18-6-CL	6	—								484	(18) 1/6 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

SANDWICH PREP

Mega Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-12M-B	1/2	115	1/6	2	6.91	27	38.5	36.75	220	(12) 1/6 size
32" 1 DOOR	SPE32HC-12M	1/2	115	1/6	2	8.01	32	38.5	39.25	246	(12) 1/6 size
36" 2 DOORS	SPE36HC-12M	2/4	115	1/6	2	10.01	36	38.5	39	276	(12) 1/6 size
	SPE36HC-15M									274	(15) 1/6 size
48" 2 DOORS	SPE48HC-12M	2/4	115	1/6	2.2	13.01	48	38.5	39.25	336	(12) 1/6 size
	SPE48HC-18M									336	(18) 1/6 size
60" 2 DOORS	SPE60HC-12M	2/4	115	1/3	5.4	16.02	60	38.5	39.25	342	(12) 1/6 size
	SPE60HC-18M									374	(18) 1/6 size
	SPE60HC-24M									392	(24) 1/6 size
72" 3 DOORS	SPE72HC-12M	3/6	115	1/3	5.4	20.02	72	38.5	39.25	432	(12) 1/6 size
	SPE72HC-18M									434	(18) 1/6 size
	SPE72HC-24M									404	(24) 1/6 size
	SPE72HC-30M									446	(30) 1/6 size

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPE27HC-12M-B-DS	1/2	115	1/6	2	6.91	27	48.75	40.75	244	(12) 1/6
48"	SPE48HC-18M-DS	2/4	115	1/6	2.2	13.01	48	48.75	40.75	376	(18) 1/6 size
60"	SPE60HC-24M-DS	2/4	115	1/3	5.4	16.02	60	48.75	40.75	430	(24) 1/6 size
72"	SPE72HC-30M-DS	3/6	115	1/3	5.4	20.02	72	48.75	40.75	504	(30) 1/6 size

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
36"	SPE36HC-15M-STL	2/4	115	1/6	2	10.01	36	38.38	53.75	274	(15) 1/6 size
48"	SPE48HC-18M-STL	2/4	115	1/6	2.2	13.01	48	38.38	53.75	354	(18) 1/6 size
60"	SPE60HC-24M-STL	2/4	115	1/3	5.4	16.02	60	38.38	55.25	414	(24) 1/6 size
72"	SPE72HC-30M-STL	3/6	115	1/3	5.4	20.02	72	38.38	56	464	(30) 1/6 size

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-12M	2	—	115	1/6	2	6.91	27	38.38	37	250	(9) 1/6 size & (3) 1/9 size
	SPED27HC-12M-B	2	—								238	(12) 1/6 size
32"	SPED32HC-12M-2	2	—	115	1/6	2	8.01	32	38.5	39.25	280	(12) 1/6 size
36"	SPED36HC-12M-2	2	—	115	1/6	2	10.01	36	38.38	37	300	(12) 1/6 size
	SPED36HC-15M-2	2	—								302	(15) 1/6 size
48"	SPED48HC-12M-2	2	1/2	115	1/6	2.2	13.01	48	38.38	37	354	(12) 1/6 size
	SPED48HC-12M-4	4	—								360	(12) 1/6 size
	SPED48HC-18M-2	2	1/2	115	1/6	2.2	13.01	48	38.38	37	366	(18) 1/6 size
	SPED48HC-18M-4	4	—								394	(18) 1/6 size
60"	SPED60HC-12M-2	2	1/2	115	1/3	5.4	16.02	60	38.38	37	390	(12) 1/6 size
	SPED60HC-12M-4	4	—								436	(12) 1/6 size
	SPED60HC-18M-2	2	1/2	115	1/3	5.4	16.02	60	38.38	37	406	(18) 1/6 size
	SPED60HC-18M-4	4	—								456	(18) 1/6 size
	SPED60HC-24M-2	2	1/2	115	1/3	5.4	16.02	60	38.38	37	414	(24) 1/6 size
	SPED60HC-24M-4	4	—								456	(24) 1/6 size
72"	SPED72HC-12M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	37	482	(12) 1/6 size
	SPED72HC-12M-4	4	1/2								484	(12) 1/6 size
	SPED72HC-12M-6	6	—								484	(12) 1/6 size
	SPED72HC-18M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	37	450	(18) 1/6 size
	SPED72HC-18M-4	4	1/2								450	(18) 1/6 size
	SPED72HC-18M-6	6	—								505	(18) 1/6 size
	SPED72HC-24M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	37	470	(24) 1/6 size
	SPED72HC-24M-4	4	1/2								492	(24) 1/6 size
	SPED72HC-24M-6	6	—								496	(24) 1/6 size
	SPED72HC-30M-2	2	2/4	115	1/3	5.4	20.02	72	38.38	37	480	(30) 1/6 size
	SPED72HC-30M-4	4	1/2								508	(30) 1/6 size
	SPED72HC-30M-6	6	—								528	(30) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

SANDWICH PREP

Clear Lid Mega Top

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-12M-B-CL	1/2	115	1/6	2	6.91	27	38.5	51.25	220	(12) 1/6 size
32" 1 DOOR	SPE32HC-12M-CL	1/2	115	1/6	2	8.01	32	38.5	50.88	246	(12) 1/6 size
36" 2 DOORS	SPE36HC-12M-CL	2/4	115	1/6	2	10.01	36	38.5	50.75	276	(12) 1/6 size
	SPE36HC-15M-CL									274	(15) 1/6 size
48" 2 DOORS	SPE48HC-12M-CL	2/4	115	1/6	2.2	13.01	48	38.5	50.75	336	(12) 1/6 size
	SPE48HC-18M-CL									336	(18) 1/6 size
60" 2 DOORS	SPE60HC-12M-CL	2/4	115	1/3	5.4	16.02	60	38.5	50.88	342	(12) 1/6 size
	SPE60HC-18M-CL									374	(18) 1/6 size
	SPE60HC-24M-CL									392	(24) 1/6 size
72" 3 DOORS	SPE72HC-12M-CL	3/6	115	1/3	5.4	20.02	72	38.5	50.75	432	(12) 1/6 size
	SPE72HC-18M-CL									434	(18) 1/6 size
	SPE72HC-24M-CL									404	(24) 1/6 size
	SPE72HC-30M-CL									446	(30) 1/6 size

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

CLEAR LIDS



DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-12M-CL	2	—	115	1/6	2	6.91	27	38.38	51.25	250	(9) 1/6 size & (3) 1/9 size
	SPED27HC-12M-B-CL	2	—								238	(12) 1/6 size
32"	SPED32HC-12M-2-CL	2	—	115	1/6	2	8.01	32	38.5	50.88	280	(12) 1/6 size
36"	SPED36HC-12M-2-CL	2	—	115	1/6	2	10.01	36	38.38	50.75	300	(12) 1/6 size
	SPED36HC-15M-2-CL	2	—								302	(15) 1/6 size
48"	SPED48HC-12M-2-CL	2	1/2	115	1/6	2.2	13.01	48	38.38	50.75	354	(12) 1/6 size
	SPED48HC-12M-4-CL	4	—								360	(12) 1/6 size
	SPED48HC-18M-2-CL	2	1/2	115	1/6	2.2	13.01	48	38.38	50.75	366	(18) 1/6 size
	SPED48HC-18M-4-CL	4	—								394	(18) 1/6 size
60"	SPED60HC-12M-2-CL	2	1/2	115	1/3	5.4	16.02	60	38.38	50.88	390	(12) 1/6 size
	SPED60HC-12M-4-CL	4	—								436	(12) 1/6 size
	SPED60HC-18M-2-CL	2	1/2	115	1/3	5.4	16.02	60	38.38	50.88	406	(18) 1/6 size
	SPED60HC-18M-4-CL	4	—								456	(18) 1/6 size
	SPED60HC-24M-2-CL	2	1/2	115	1/3	5.4	16.02	60	38.38	50.88	414	(24) 1/6 size
	SPED60HC-24M-4-CL	4	—								456	(24) 1/6 size
72"	SPED72HC-12M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	482	(12) 1/6 size
	SPED72HC-12M-4-CL	4	1/2								484	(12) 1/6 size
	SPED72HC-12M-6-CL	6	—								484	(12) 1/6 size
	SPED72HC-18M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	450	(18) 1/6 size
	SPED72HC-18M-4-CL	4	1/2								450	(18) 1/6 size
	SPED72HC-18M-6-CL	6	—								505	(18) 1/6 size
	SPED72HC-24M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	470	(24) 1/6 size
	SPED72HC-24M-4-CL	4	1/2								492	(24) 1/6 size
	SPED72HC-24M-6-CL	6	—								496	(24) 1/6 size
	SPED72HC-30M-2-CL	2	2/4	115	1/3	5.4	20.02	72	38.38	50.75	480	(30) 1/6 size
	SPED72HC-30M-4-CL	4	1/2								508	(30) 1/6 size
	SPED72HC-30M-6-CL	6	—								528	(30) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

SANDWICH PREP

Cutting Top

17" DEEP REVERSIBLE CUTTING BOARD

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27" 1 DOOR	SPE27HC-C	1/2	115	1/6	2	6.91	27	38.38	39.38	212	(6) 1/6 size & (2) 1/9 size
	SPE27HC-C-B									212	(8) 1/6 size
36" 2 DOORS	SPE36HC-08C	2/4	115	1/6	2	10.01	36	38.38	39	268	(8) 1/6 size
	SPE36HC-10C									276	(10) 1/6 size
48" 2 DOORS	SPE48HC-08C	2/4	115	1/6	2.2	13.01	48	38.38	39.25	326	(8) 1/6 size
	SPE48HC-10C									322	(10) 1/6 size
	SPE48HC-12C									326	(12) 1/6 size
60" 2 DOORS	SPE60HC-08C	2/4	115	1/3	5.4	16.02	60	38.38	39	332	(8) 1/6 size
	SPE60HC-10C									334	(10) 1/6 size
	SPE60HC-12C									342	(12) 1/6 size
	SPE60HC-16C									376	(16) 1/6 size
72" 3 DOORS	SPE72HC-08C	3/6	115	1/3	5.4	20.02	72	38.38	39	396	(8) 1/6 size
	SPE72HC-10C									427	(10) 1/6 size
	SPE72HC-12C									420	(12) 1/6 size
	SPE72HC-18C									438	(18) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.


AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order	


DRAWER PAN CONFIGURATIONS for all SPED units



SPED27 / SPED32 / SPED60



SPED36



SPED48 / SPED72

DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	STANDARD PANS 4" DEEP
27"	SPED27HC-C	2	—	115	1/6	2	6.91	27	38.38	39.38	238	(6) 1/6 size & (2) 1/9 size
	SPED27HC-C-B	2	—								238	(8) 1/6 size
36"	SPED36HC-08C-2	2	—	115	1/6	2	10.01	36	38.25	39	276	(8) 1/6 size
	SPED36HC-10C-2	2	—								278	(10) 1/6 size
48"	SPED48HC-08C-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	358	(8) 1/6 size
	SPED48HC-08C-4	4	—								358	(8) 1/6 size
	SPED48HC-10C-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	326	(10) 1/6 size
	SPED48HC-10C-4	4	—								326	(10) 1/6 size
	SPED48HC-12C-2	2	1/2	115	1/6	2.2	13.01	48	38.38	39.25	348	(12) 1/6 size
	SPED48HC-12C-4	4	—								380	(12) 1/6 size
60"	SPED60HC-08C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39	404	(8) 1/6 size
	SPED60HC-08C-4	4	—								404	(8) 1/6 size
	SPED60HC-10C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39	406	(10) 1/6 size
	SPED60HC-10C-4	4	—								406	(10) 1/6 size
	SPED60HC-12C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39	402	(12) 1/6 size
	SPED60HC-12C-4	4	—								368	(12) 1/6 size
	SPED60HC-16C-2	2	1/2	115	1/3	5.4	16.02	60	38.38	39	420	(16) 1/6 size
	SPED60HC-16C-4	4	—								456	(16) 1/6 size
72"	SPED72HC-08C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.13	450	(8) 1/6 size
	SPED72HC-08C-4	4	1/2								454	(8) 1/6 size
	SPED72HC-08C-6	6	—								456	(8) 1/6 size
	SPED72HC-10C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.13	448	(10) 1/6 size
	SPED72HC-10C-4	4	1/2								450	(10) 1/6 size
	SPED72HC-10C-6	6	—								452	(10) 1/6 size
	SPED72HC-12C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.13	418	(12) 1/6 size
	SPED72HC-12C-4	4	1/2								442	(12) 1/6 size
	SPED72HC-12C-6	6	—								508	(12) 1/6 size
	SPED72HC-18C-2	2	2/4	115	1/3	5.4	20.02	72	38.38	39.13	468	(18) 1/6 size
	SPED72HC-18C-4	4	1/2								486	(18) 1/6 size
	SPED72HC-18C-6	6	—								538	(18) 1/6 size

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.


SANDWICH PREP

Pan Configurations


Standard Top



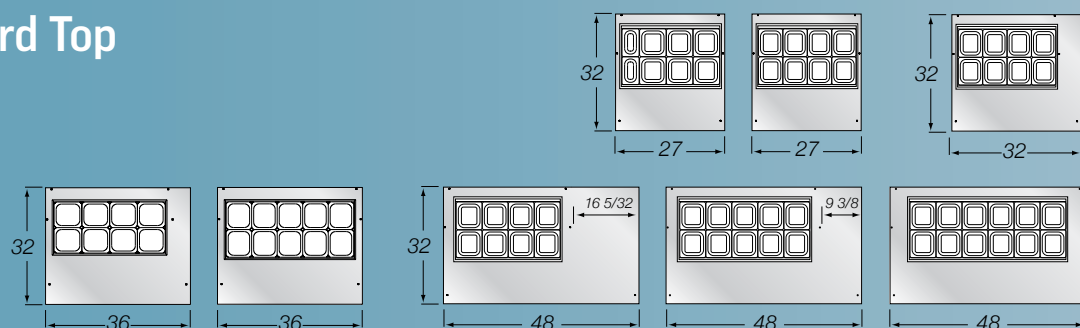


Mega Top

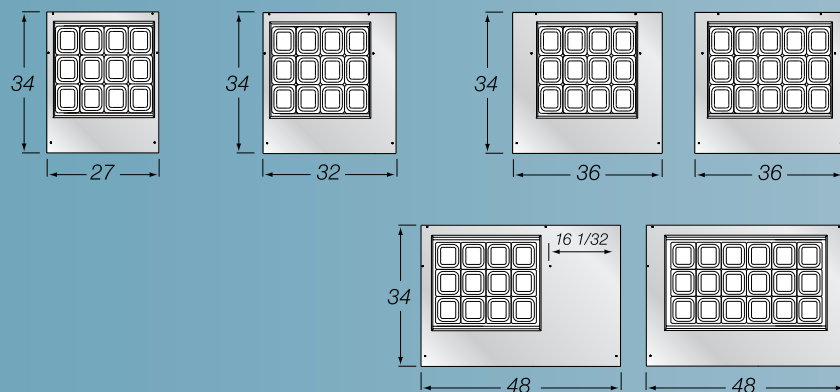

Cutting Top

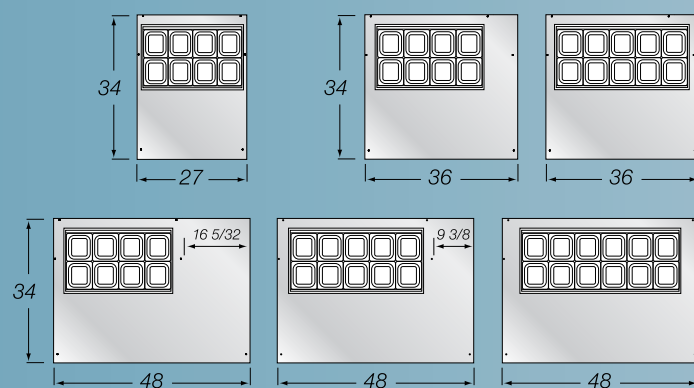

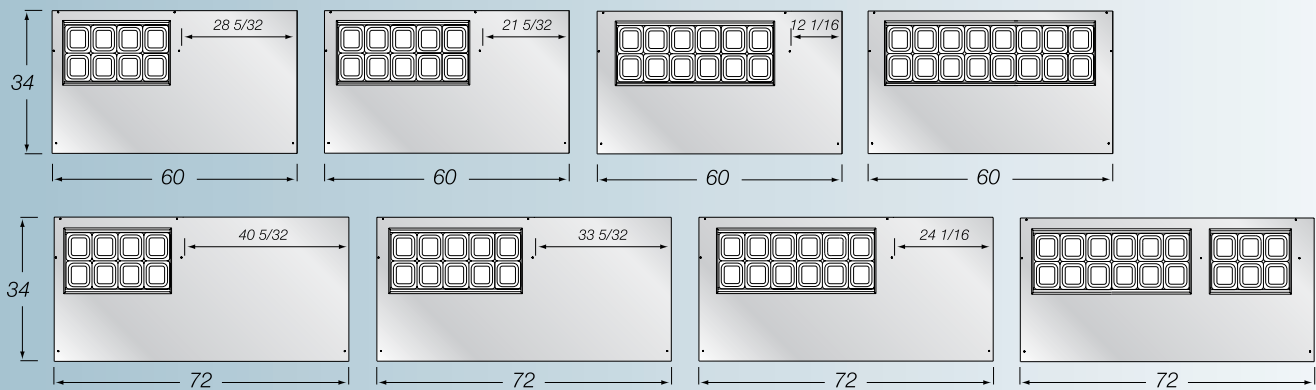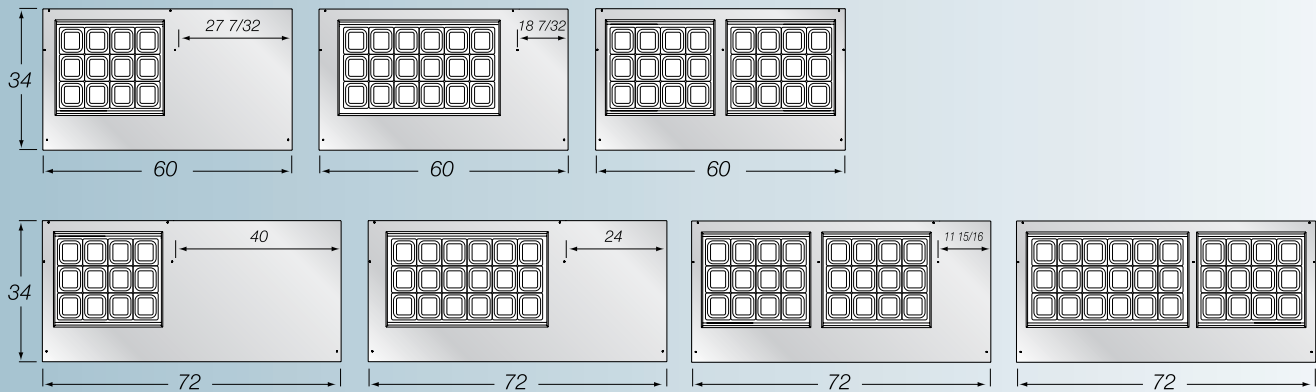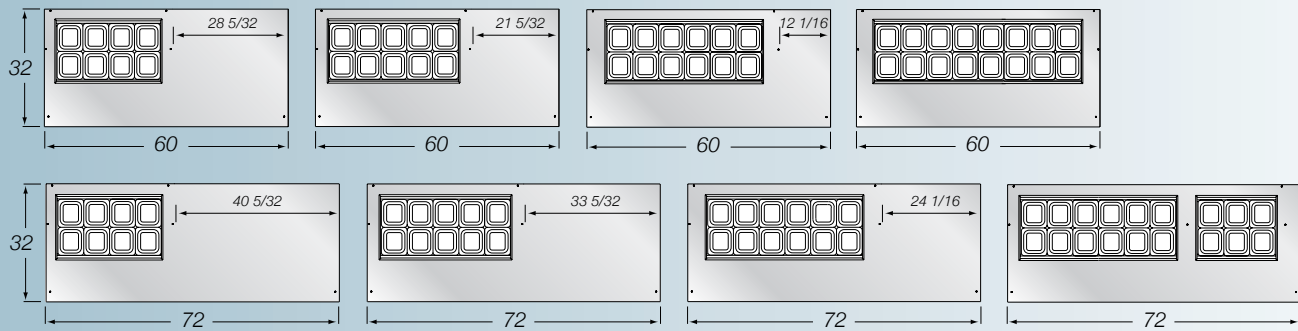

PIZZA PREP

**REDESIGNED
FOR 2019**

New duct system features uniform airflow distribution
over evaporator coil and throughout raised rail

Newly designed easy-open lid system
provides easier accessibility

Electronic controller with smart-defrost

Electrical defrost heater
terminates defrost sooner, reducing product instability

Right or left compressor placement
specify at time of order

Field reversible doors
with 120 degree stay open feature

Heavy-duty aluminum pan liner
is easy to clean and prevents spills from falling into cabinet

Accommodates up to 6" deep food service pans
Not included

Improved serviceability
Removable service panel for easy access to refrigeration system

**Featuring environmentally friendly
energy efficient R290 refrigerant**



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS
LOW-PROFILE DESIGN FOR ENHANCED ERGONOMICS AND PRODUCT DISPLAY
IMPROVED AIRFLOW MAINTAINS CONSISTENT PAN TEMPERATURE IN TOP RAIL



3 DRAWERS IN SINGLE SECTION
available on all sizes



CLEAR LIDS AVAILABLE
for optimized product display

ACCESS OPTIONS

- Doors
- Drawers (stacks of 2 or 3)

LID OPTIONS

- Clear lids
- Removable lids

AGENCY CERTIFICATIONS



Pizza & Deli Prep Tables



EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless

AVAILABLE ACCESSORIES

- Composite cutting boards
- Bun tray racks
- Overshelf
- Locks
- Additional shelves



AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available
- Alternate compressor locations

MOUNTING OPTIONS

- 3" casters (standard)
- 6" casters
- 6" legs

Pizza Prep

DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FULL SIZE PAN CAPACITY
46"	DP46HC	1/2	115	1/3	4.5	11.91	46	36.88	49.38	336	2
60"	DP60HC	2/4	115	1/3	4.5	17	60	37	49.5	440	3
67"	DP67HC	2/4	115	1/3	4.5	20.68	67	37	49.25	440	3
72"	DP72HC	2/4	115	1/3	4.5	21.87	72	37	49.75	438	3
93"	DP93HC	3/6	115	1/2	7.8	31.54	93	37	49.38	574	4
119"	DP119HC	4/8	115	1/2	7.8	42.2	119	37	49.38	712	5


Depth measurement includes cutting board.
For total height, add 3 or 6 inches, based on your mounting choice.



DPD72HC-3 (see page 90)



PAN CONFIGURATIONS for DP and DPD units

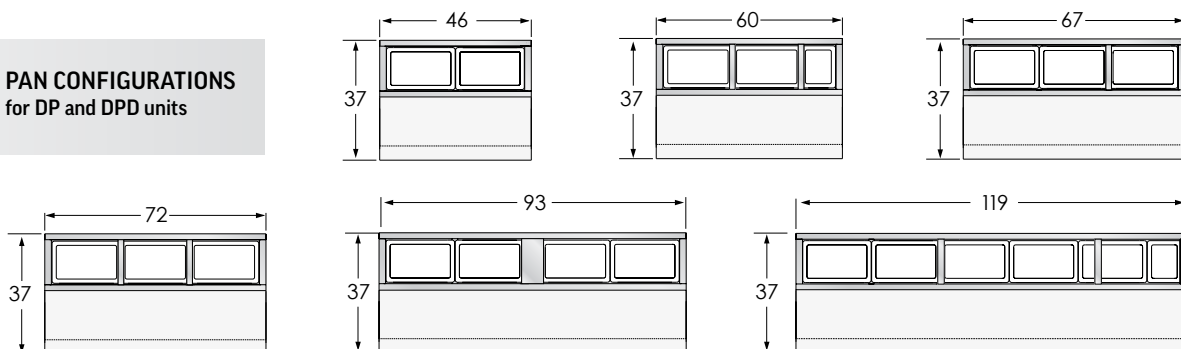

Pizza Prep


DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FULL SIZE PAN CAPACITY
46"	DPD46HC-2	2	-	115	1/3	4.5	11.91	46	37	49.38	311	2
	DPD46HC-3	3										
60"	DPD60HC-2	2	-	115	1/3	4.5	17	60	37	49.50	454	2
	DPD60HC-3	3										
67"	DPD67HC-2	2	1/2	115	1/3	4.5	20.68	67	37	49.25	484	3
	DPD67HC-3	3										
	DPD67HC-4	4	-									
	DPD67HC-6	6										
72"	DPD72HC-2	2	1/2	115	1/3	4.5	21.87	72	37	49.63	540	3
	DPD72HC-3	3										
	DPD72HC-4	4	-									
	DPD72HC-6	6										
93"	DPD93HC-2	2	2/4	115	1/2	7.8	31.54	93	37	49.38	600	4
	DPD93HC-3	3										
	DPD93HC-4	4	1/2									
	DPD93HC-6	6	-									
119"	DPD119HC-2	2	3/6	115	1/2	7.8	42.2	119	37	49.38	703	5
	DPD119HC-3	3	3/6									
	DPD119HC-4	4	2/4									
	DPD119HC-6	6	1/2									
	DPD119HC-6T	6	2/4									
	DPD119HC-8	8	-									
	DPD119HC-9	9	1/2									

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.


DRAWER PAN CONFIGURATIONS for DPD units

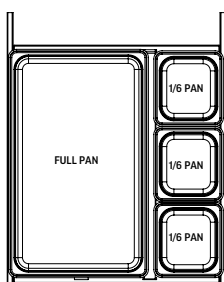



DPD46 / DPD67 / DPD93 / DPD119

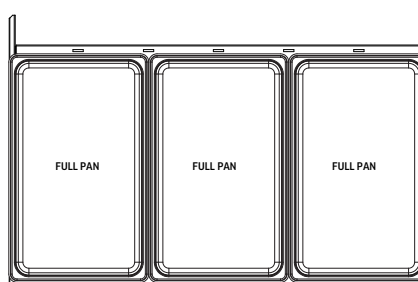

DPD60




DPD72



DPD46HC-2




DPD46HC-3




DPD60HC-2




DPD60HC-3




DPD67HC-2




DPD67HC-3




DPD67HC-4




DPD67HC-6




DPD72HC-2




DPD72HC-3




DPD72HC-4




DPD72HC-6




DPD93HC-2




DPD93HC-3




DPD93HC-4




DPD93HC-6

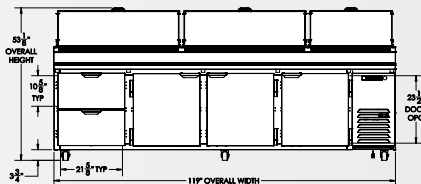


DPD119HC-2




DPD119HC-3




DPD119HC-4




DPD119HC-6



DPD119HC-6T



DPD119HC-8



DPD119HC-9

Food Prep Table Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf (Large)	SPE27/27-12M/27C	403-826B
Epoxy Coated Wire Shelf (Small)	SPE27/SPE27-12M/SPE27C	403-912D-01
Epoxy Coated Wire Shelf (Large)	SPE36/SPE36M/SPE36C	403-911D-01
Epoxy Coated Wire Shelf (Small)	SPE36/SPE36M/SPE36C	403-915D-01
Epoxy Coated Wire Shelf (Large)	SPE48/48M/48C	403-828B
Epoxy Coated Wire Shelf (Small)	SPE48/SPE48M/SPE48C	403-913D-01
Epoxy Coated Wire Shelf (Large)	SPE60/60M/60C	403-829B
Epoxy Coated Wire Shelf (Small)	SPE60/SPE60M/SPE60C	403-914D-01
Epoxy Coated Ctr Section Wire Shelf (Large)	SPE72/72M/72C	403-827B
Epoxy Coated Wire Shelf L&R (Large)	SPE72/72M/72C	403-828B
Epoxy Coated Ctr Section Wire Shelf (Small)	SPE72/SPE72M/SPE72C	403-912D-01
Epoxy Coated Wire Shelf L&R (Small)	SPE72/SPE72M/SPE72C	403-913D-01
Shelf Clip	All SPE/SPED/DP/DPD	403-169A
Epoxy Coated Large Shelf	SPE27	403-722C
Epoxy Coated Small Shelf	SPE27	403-721C
Epoxy Coated Large Shelf	SPE36	403-723C
Epoxy Coated Small Shelf	SPE36	403-721C
Epoxy Coated Large Shelf	SPE48	403-723C
Epoxy Coated Small Shelf	SPE48	403-721C
Epoxy Coated Large Shelf	SPE60	403-723C
Epoxy Coated Small Shelf	SPE60	403-721C
Epoxy Coated Large Shelf	SPE72	403-723C
Epoxy Coated Small Shelf	SPE72	403-721C
Bottle Organizer (Holds Qty. 10 Bottles) 16 oz.	SPE Mega Tops	00B23-023D-01
Bottle Organizer (Holds Qty. 10 Bottles) 24 oz.	SPE Mega Tops	00B23-024D-01
Bottle Organizer (Holds Qty. 8 Bottles) 16 oz.	SPE Standard & Cutting Tops	00B23-025D-01
Bottle Organizer (Holds Qty. 6 Bottles) 24 oz.	SPE Standard & Cutting Tops	00B23-026D-01
CRUMBCATCHERS		
Crumbcatcher Kit	SPE27A/SPE27B/SPE27MA/SPE27MB	00C23-071A-01
Crumbcatcher Kit	SPE36/36M	00C23-071A-09
Crumbcatcher Kit	SPE48/48M	00C23-071A-02
Crumbcatcher Kit	SPE60/60M	00C23-071A-03
Crumbcatcher Kit	SPE72/72M	00C23-071A-04
Crumbcatcher Kit	SPE27C	00C23-071A-05
Crumbcatcher Kit	SPE36C	00C23-071A-10
Crumbcatcher Kit	SPE48C	00C23-071A-06
Crumbcatcher Kit	SPE60C	00C23-071A-07
Crumbcatcher Kit	SPE72C	00C23-071A-08
Side Crumbcatcher Kit	SPE Series	00C23-072A
TRAY SLIDES & PAN INSERTS		
Tray Slide	SPE60	403-963D
Tray Slide	SPE72	403-968D
Pan Insert	SPE27A	00B23-032D-01
Pan Insert	SPE27B	00B32-033D-01

SPE WHITE POLY CUTTING BOARDS		
10" Cutting Board	SPE27/27-12M, SPED27	705-290C-01
10" Cutting Board	SPE36/SPE36 MEGA/SPED36	705-290C-05
10" Cutting Board	SPE48/48M, SPED48	705-290C-02
10" Cutting Board	SPE60/60M, SPED60	705-290C-03
10" Cutting Board	SPE72/72M, SPED72	705-290C-04
17" Cutting Board	SPE27C, SPED27C	705-264C
17" Cutting Board	SPE36C/SPED36C	705-414D-01
17" Cutting Board	SPE48C, SPED48C	705-265C
17" Cutting Board	SPE60C, SPED60C	705-266C
17" Cutting Board	SPE72C, SPED72C	705-267C

DP WHITE POLY CUTTING BOARDS (1/2" THICK)		
19" Cutting Board	DP46	705-307C-01
19" Cutting Board	DP67	705-286B
19" Cutting Board	DP93	705-287B
19" Cutting Board	DP119	705-288B

SPE COMPOSITE CUTTING BOARDS (1/2" THICK)		
10" Composite Cutting Board	SPE27M	705-392D-06
17" Composite Cutting Board	SPE27C	705-392D-07
10" Composite Cutting Board	SPE36A	705-392D-15
17" Composite Cutting Board	SPE36A	705-392D-16
10" Composite Cutting Board	SPE48	705-392D-04
12" Composite Cutting Board	SPE48	705-378B-01
15" Composite Cutting Board	SPE48C	705-392D-01
17" Composite Cutting Board	SPE48C	705-392D-08
10" Composite Cutting Board	SPE60	705-392D-05
15" Composite Cutting Board	SPE60C	705-392D-02
17" Composite Cutting Board	SPE60C	705-392D-09
10" Composite Cutting Board	SPE72	705-378B-02
17" Composite Cutting Board	SPE72C	705-392D-10

DP COMPOSITE CUTTING BOARDS (1/2" THICK)		
19" X 46" Composite Cutting Board	DP46	705-392D-11
19" X 67" Composite Cutting Board	DP67	705-392D-12
19" X 93" Composite Cutting Board	DP93	705-392D-13
19" X 119" Composite Cutting Board	DP119	705-392D-14

ADDITIONAL ACCESSORIES		
Door Lock	DP, SPE (per door)	00C30-099A
Digital Thermometer	DD, SPE	402-249A

MOUNTING		
3" Caster	SPE units (set of four)	00C31-041A
6" Caster	SPE units (set of four)	00C31-038A
3" Caster	DP46,67,93 (set of four)	61C01-013A
6" Caster	DP46,67,93 (set of four)	61C01-001A
3" Caster	DP119 (set of six)	61C01-012A
6" Black Leg	SPE units (set of four)	58B02S001A
6" Black Leg	DP46,67,93 (set of four)	58B02S001A
6" Black Leg	DP119 (set of six)	58B02S002A
6" Seismic/Flanged Legs	SPE Series (set of four)	00C31-055A
6" Seismic/Flanged Legs	DP Series (set of four)	00C31-055A
2 3/4 in Caster Kit	Low Profile (set of four) SPE	00C31-049A
2" Roller Kit	SPE units	00C31S045A

Food Prep Table Accessories

OVERSHELVES		
10" Single	SPE27	00C23S026A
10" Single	SPE36-08	00C23-074A-11
10" Single	SPE36-10	00C23-074A-12
10" Single	SPE48	00C23-027A
10" Single	SPE60	00C23-028A
10" Single	SPE72	00C23-029A
10" Double	SPE27	00C23-030A
10" Double	SPE36-08	00C23-075A-08
10" Double	SPE36-10	00C23-075A-09
10" Double	SPE48	00C23-031A
10" Double	SPE60	00C23-032A
10" Double	SPE72	00C23-033A
Single	SPE27-12M	00C23-074A-01
Single	SPE36-12M	00C23-074A-10
Single	SPE36-15M	00C23-074A-12
Single	SPE48/60/72-12M	00C23-074A-02
Single	SPE48-18M	00C23-074A-03
Single / For Dual-Sided	SPE48-18M-DS	00C23-105D
Single	SPE60-18M	00C23-074A-04
Single	SPE60-24M	00C23-074A-05
Single / For Dual-Sided	SPE60-24M-DS	00C23-106D
Single	SPE72-18M	00C23-074A-06
Single	SPE72-24M	00C23-074A-07
Single	SPE72-30M	00C23-074A-08
Single / For Dual-Sided	SPE72-30M-DS	00C23-093A
Double	SPE27-12M	00C23-030A
Double	SPE27-12M-B	00C23-075A-06
Double	SPE36-12M	00C23-075A-8
Double	SPE36-15M	00C23-075A-09
Double	SPE48-12M	00C23-075A-01
Double / For Dual-Sided	SPE48-18M-DS	00C23-107D-02
Double	SPE60-12M	00C23-075A-01
Double	SPE72-12M	00C23-075A-01
Double	SPE48-18M	00C23-075A-02
Double	SPE60-18M	00C23-075A-03
Double	SPE60-24M	00C23-075A-04
Double / For Dual-Sided	SPE60-24M-DS	00C23-107D-03
Double	SPE72-24M	00C23-032A
Double	SPE72-30M	00C23-075A-05
Double / For Dual-Sided	SPE72-30M-DS	00C23-107D-04

OVERSHELVES CONT'D		
Single - 14" Deep	DP46	00C23-044A
Single - 14" Deep	DP67	00C23-045A
Single - 14" Deep	DP93	00C23-046A
Single - 14" Deep	DP119	00C23-047A
Single - 14" Deep	DP46	00C23-119D-01
Double - 14" Deep	DP67	00C23-116D-01
Double - 14" Deep	DP93	00C23-120D-00
Double - 14" Deep	DP119	00C23-121D-00
Single - 14" Deep	SPE36-15M-STL	00C23-110D
Single - 14" Deep	SPE48-18M-STL	00C23-094D
Single - 14" Deep	SPE60-24M-STL	00C23-095D
Single - 14" Deep	SPE72-30M-STL	00C23-096D
Single - 14" Deep with side guards & LED light	SPE48-18M-STL	00C23-113D-01
Single - 14" Deep with side guards & LED light	SPE60-24M-STL	00C23-113D-02
Single - 14" Deep with side guards & LED light	SPE72-30M-STL	00C23-113D-03
Double - 10" Deep	SPE27 (will not work on B top)	00C23-123D-00
Double - 10" Deep	SPE36	00C23-124D-00
Double - 10" Deep	SPE48	00C23-125D-00
Double - 10" Deep	SPE60	00C23-126D-00
Double - 10" Deep	SPE72	00C23-127D-00
Double - 18" Deep	SPE27-M (will not fit on B top)	00C23-128D-00
Double - 18" Deep	SPE36-M	00C23-129D-00
Double - 18" Deep	SPE48-M	00C23-130D-00
Double - 18" Deep	SPE60-M	00C23-131D-00
Double - 18" Deep	SPE72-M	00C23-132D-00

NIGHT COVERS FOR STANDARD PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
SPE27HCHC	1	8 pan cover	00C32-013A-02
SPE32HCHC-08	1	8 pan cover	00C32-013A-06
SPE36HC-08	1	8 pan cover	00C32-013A-06
SPE36HC-10	1	10 pan cover	00C32-013A-07
SPE48HC-08	1	8 pan cover	00C32-013A-02
SPE48HC-10	1	10 pan cover	00C32-013A-03
SPE48HC-12	1	12 pan cover	00C32-013A-04
SPE60HC-08	1	8 pan cover	00C32-013A-02
SPE60HC-10	1	10 pan cover	00C32-013A-03
SPE60HC-12	1	12 pan cover	00C32-013A-04
SPE60HC-16	1	16 pan cover	00C32-013A-05
SPE72HC-08	1	8 pan cover	00C32-013A-02
SPE72HC-10	1	10 pan cover	00C32-013A-03
SPE72HC-12	1	12 pan cover	00C32-013A-04
SPE72HC-18	2	12 pan cover	00C32-013A-04
		6 pan cover	00C32-013A-01

NIGHT COVERS FOR MEGATOP PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
SPE27HC-12M	1	12 pan cover	00C32-014A-01
SPE32HC-12M	1	12 pan cover	00C32-014A-01
SPE36HC-12M	1	12 pan cover	00C32-014A-01
SPE36HC-15M	1	15 pan cover	00C32-014A-04
SPE48HC-12M	1	12 pan cover	00C32-014A-01
SPE48HC-18M	1	18 pan cover	00C32-014A-02
SPE60HC-12M	1	12 pan cover	00C32-014A-01
SPE60HC-18M	1	18 pan cover	00C32-014A-02
SPE60HC-24M	2	12 pan cover (order two)	00C32-014A-01
SPE72HC-12M	1	12 pan cover	00C32-014A-01
SPE72HC-18M	1	18 pan cover	00C32-014A-02
SPE72HC-24M	2	12 pan cover (order two)	00C32-014A-01
SPE72HC-30M	2	12 pan cover	00C32-014A-01
		18 pan cover	00C32-014A-02





WORKTOPS & UNDERCOUNTERS

FOUNDATION OF KITCHEN LAYOUTS BUILT TO PERFORM

WORKTOPS

Stainless steel top

Full electronic control

Interior thermometer

Self-closing doors

with 120° stay-open feature,
on cartridge style hinges

Easy door removal

for service and cleaning

Magnetic gasket

attached to each door
for positive seal

Two epoxy-coated steel wire shelves per section

Field-reversible doors

6" heavy duty casters

3" casters or 6" leg option available
at no charge when specified on order



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY

MADE IN USA



REMOVABLE BACKSPLASH
available as an option, as well as a Flat
Top, or a Foamed-in-Place backsplash



FIELD REVERSIBLE DOORS
for layout flexibility

ACCESS OPTIONS

- Doors
- Drawers

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless

AVAILABLE ACCESSORIES

- Overshelf kits
- Composite cutting boards
- Bun tray rack
- Locks (doors only)
- Glass doors
- 16-gauge stainless steel top

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

BACKSPLASH OPTIONS

- Removable
- 4" foamed-in-place
- Flat-top

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

WORKTOPS

Rear-Mounted Refrigeration


REFRIGERATORS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


MODEL WIDTH	MODEL DEPTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
24"	Solid	WTR24AHC	1/2	115	1/6	2	5.16	24	32	33.63	168	REMOVABLE
	Solid	WTR24AHC-FIP	1/2	115	1/6	2	5.16	24	32	33.63	182	FOAM
	Solid	WTR24AHC-FLT	1/2	115	1/6	2	5.16	24	32	29.63	168	FLAT TOP
27"	Solid	WTR27AHC	1/2	115	1/6	2	6.13	27	32	33.63	184	REMOVABLE
	Solid	WTR27AHC-FIP	1/2	115	1/6	2	6.13	27	32	33.63	172	FOAM
	Solid	WTR27AHC-FLT	1/2	115	1/6	2	6.13	27	32	29.63	180	FLAT TOP
32"	Solid	WTR32AHC	1/2/	115	1/6	2	7.2	32	32	33.63	184	REMOVABLE
	Solid	WTR32AHC-FIP	1/2/	115	1/6	2	7.2	32	32	33.63	172	FOAM
	Solid	WTR32AHC-FLT	1/2/	115	1/6	2	7.2	32	32	33.63	180	FLAT TOP
36"	Solid	WTR36AHC	2/4	115	1/6	2	8.5	36	32	33.63	216	REMOVABLE
	Solid	WTR36AHC-FIP	2/4	115	1/6	2	8.5	36	32	33.63	226	FOAM
	Solid	WTR36AHC-FLT	2/4	115	1/6	2	8.5	36	32	29.63	212	FLAT TOP
48"	Solid	WTR48AHC	2/4	115	1/6	2.2	11.82	48	32	33.63	258	REMOVABLE
	Solid	WTR48AHC-FIP	2/4	115	1/6	2.2	11.82	48	32	33.63	266	FOAM
	Solid	WTR48AHC-FLT	2/4	115	1/6	2.2	11.82	48	32	29.63	235	FLAT TOP
60"	Solid	WTR60AHC	2/4	115	1/5	3	14.75	60	32	33.63	312	REMOVABLE
	Solid	WTR60AHC-FIP	2/4	115	1/5	3	14.75	60	32	33.63	322	FOAM
	Solid	WTR60AHC-FLT	2/4	115	1/5	3	14.75	60	32	29.63	300	FLAT TOP
72"	Solid	WTR72AHC	3/6	115	1/5	3	17.88	72	32	33.63	334	REMOVABLE
	Solid	WTR72AHC-FIP	3/6	115	1/5	3	17.88	72	32	33.63	362	FOAM
	Solid	WTR72AHC-FLT	3/6	115	1/5	3	17.88	72	32	29.63	347	FLAT TOP

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.


BACKSPLASH OPTIONS	
SUFFIX	EXTERIOR
(standard)	Removable backsplash
FIP	4" foamed-in-place backsplash
FLT	Flat-top with no backsplash



STANDARD



FOAMED IN PLACE




FLAT-TOP

REFRIGERATORS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
20"	Solid	WTR20HC	1/2	115	1/6	2	2.34	20	24.5	30.13	116	REMOVABLE
	Solid	WTR20HC-FIP	1/2	115	1/6	2	2.34	20	24.5	30.13	124	FOAM
	Solid	WTR20HC-FLT	1/2	115	1/6	2	2.34	20	24.5	30.13	119	FLAT TOP
27"	Solid	WTR27HC	1/2	115	1/6	2	5.25	27	29.88	33.63	161	REMOVABLE
	Solid	WTR27HC-FIP	1/2	115	1/6	2	5.25	27	29.88	33.63	161	FOAM
	Solid	WTR27HC-FLT	1/2	115	1/6	2	5.25	27	29.88	29.63	160	FLAT TOP
34"	Solid	WTR34HC	2/4	115	1/6	2	3.88	34	24.63	30.13	171	REMOVABLE
	Solid	WTR34HC-FIP	2/4	115	1/6	2	3.88	34	24.63	30.13	172	FOAM
	Solid	WTR34HC-FLT	2/4	115	1/6	2	3.88	34	24.63	26.13	172	FLAT TOP

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

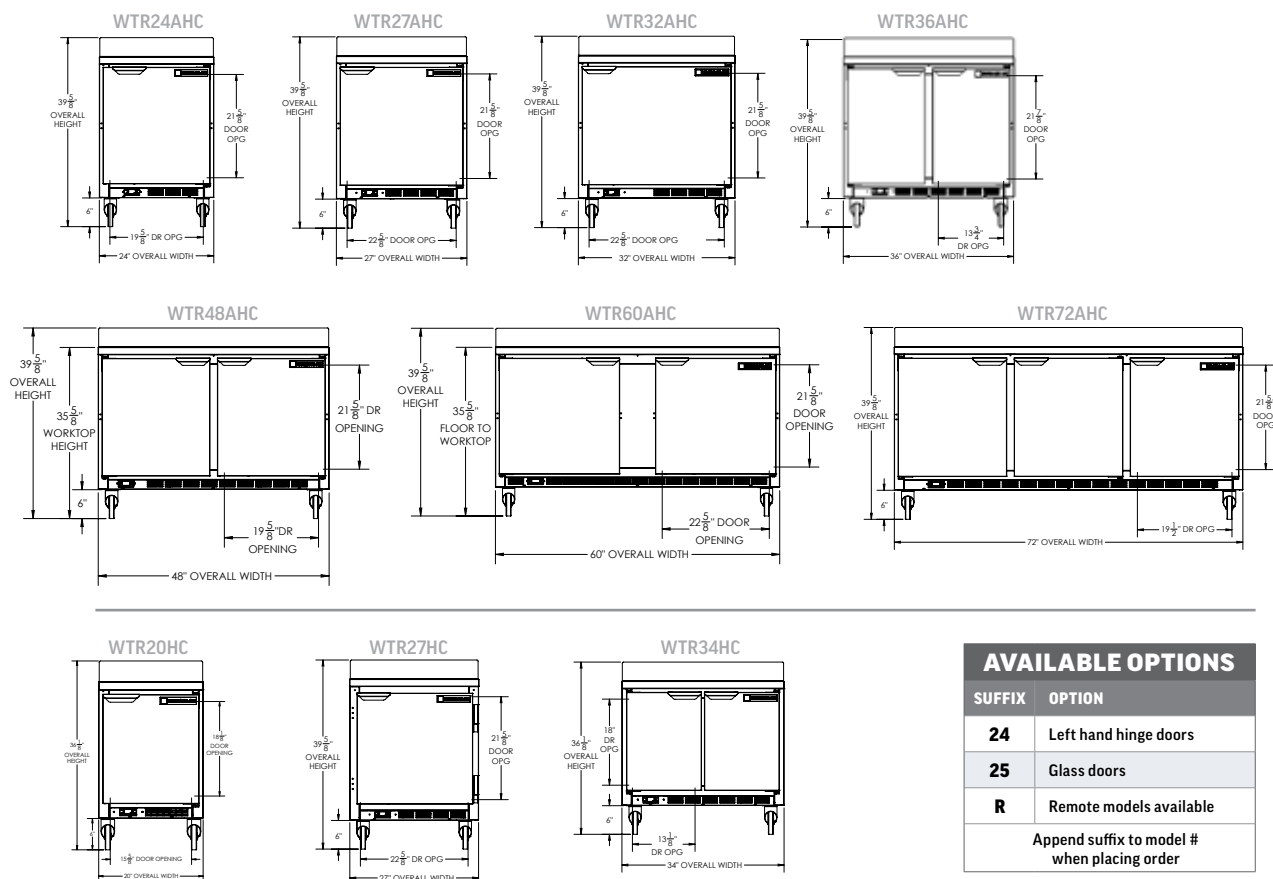

WORKTOPS

Rear-Mounted Refrigeration


REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
27"	WTRD27AHC-2	2	—	115	1/6	2	6.13	27	32	33.63	202	REMOVABLE
	WTRD27AHC-2-FIP	2	—	115	1/6	2	6.13	27	32	33.63	202	FOAM
	WTRD27AHC-2-FLT	2	—	115	1/6	2	6.13	27	32	29.63	192	FLAT TOP
32"	WTRD32AHC-2	2	—	115	1/6	2	7.2	32	32	33.63	230	REMOVABLE
	WTRD32AHC-2-FIP	2	—	115	1/6	2	7.2	32	32	33.63	244	FOAM
	WTRD32AHC-2-FLT	2	—	115	1/6	2	7.2	32	32	29.63	226	FLAT TOP
36"	WTRD36AHC-2	2	—	115	1/6	2	8.5	36	32	33.63	244	REMOVABLE
	WTRD36AHC-2-FIP	2	—	115	1/6	2	8.5	36	32	33.63	258	FOAM
	WTRD36AHC-2-FLT	2	—	115	1/6	2	8.5	36	32	29.63	240	FLAT TOP
48"	WTRD48AHC-2	2	1/2	115	1/6	2.2	11.82	48	32	33.63	282	REMOVABLE
	WTRD48AHC-4	4	—	115	1/6	2.2	11.82	48	32	33.63	326	REMOVABLE
	WTRD48AHC-2-FIP	2	1/2	115	1/6	2.2	11.82	48	32	33.63	282	FOAM
	WTRD48AHC-4-FIP	4	—	115	1/6	2.2	11.82	48	32	33.63	334	FOAM
	WTRD48AHC-2-FLT	2	1/2	115	1/6	2.2	11.82	48	32	29.63	242	FLAT TOP
	WTRD48AHC-4-FLT	4	—	115	1/6	2.2	11.82	48	32	29.63	326	FLAT TOP

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.





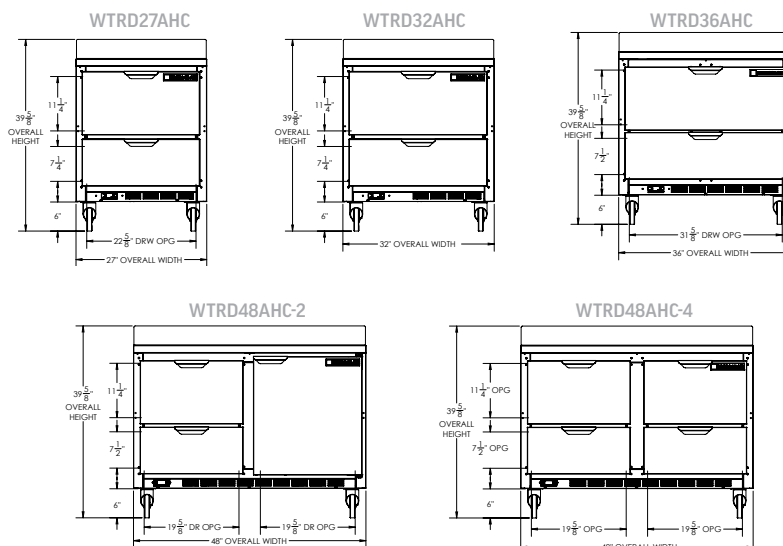


REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
60"	WTRD60AHC-2	2	1/2	115	1/5	3	14.75	60	32	33.63	342	REMOVABLE
	WTRD60AHC-4	4	—	115	1/5	3	14.75	60	32	33.63	356	REMOVABLE
	WTRD60AHC-2-FIP	2	1/2	115	1/5	3	14.75	60	32	33.63	342	FOAM
	WTRD60AHC-4-FIP	4	—	115	1/5	3	14.75	60	32	33.63	386	FOAM
	WTRD60AHC-2-FLT	2	1/2	115	1/5	3	14.75	60	32	29.63	330	FLAT TOP
	WTRD60AHC-4-FLT	4	—	115	1/5	3	14.75	60	32	29.63	271	FLAT TOP
72"	WTRD72AHC-2	2	2/4	115	1/5	3	17.88	72	32	33.63	370	REMOVABLE
	WTRD72AHC-4	4	1/2	115	1/5	3	17.88	72	32	33.63	370	REMOVABLE
	WTRD72AHC-6	6	—	115	1/5	3	17.88	72	32	33.63	330	REMOVABLE
	WTRD72AHC-2-FIP	2	2/4	115	1/5	3	17.88	72	32	33.63	370	FOAM
	WTRD72AHC-4-FIP	4	1/2	115	1/5	3	17.88	72	32	33.63	370	FOAM
	WTRD72AHC-6-FIP	6	—	115	1/5	3	17.88	72	32	33.63	370	FOAM
	WTRD72AHC-2-FLT	2	2/4	115	1/5	3	17.88	72	32	29.63	370	FLAT TOP
	WTRD72AHC-4-FLT	4	1/2	115	1/5	3	17.88	72	32	29.63	330	FLAT TOP
	WTRD72AHC-6-FLT	6	—	115	1/5	3	17.88	72	32	29.63	422	FLAT TOP

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

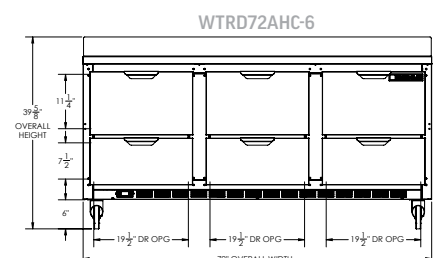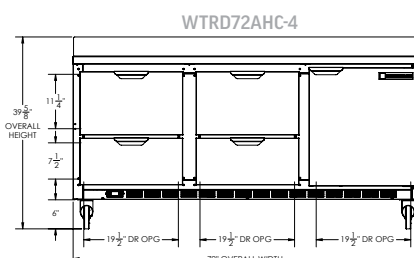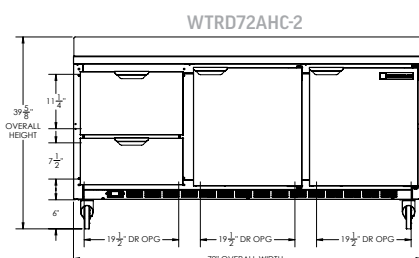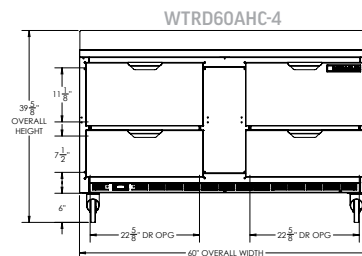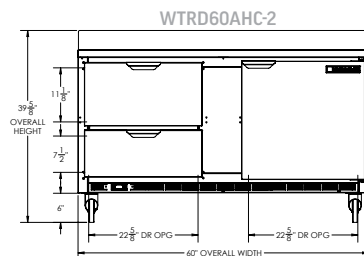

WORKTOPS

Rear-Mounted Refrigeration

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL DEPTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
24"	Solid	WTF24AHC	1/2	115	1/4	2.5	5.16	24	32	33.63	190	REMOVABLE
	Solid	WTF24AHC-FIP	1/2	115	1/4	2.5	5.16	24	32	33.63	184	FOAM
	Solid	WTF24AHC-FLT	1/2	115	1/4	2.5	5.16	24	32	29.63	184	FLAT TOP
27"	Solid	WTF27AHC	1/2	115	1/4	2.5	6.13	27	32	33.63	190	REMOVABLE
	Solid	WTF27AHC-FIP	1/2	115	1/4	2.5	6.13	27	32	33.63	202	FOAM
	Solid	WTF27AHC-FLT	1/2	115	1/4	2.5	6.13	27	32	29.63	184	FLAT TOP
32"	Solid	WTF32AHC	1/2	115	1/3+	4	7.2	32	32	33.63	220	REMOVABLE
	Solid	WTF32AHC-FIP	1/2	115	1/3+	4	7.2	32	32	33.63	230	FOAM
	Solid	WTF32AHC-FLT	1/2	115	1/3+	4	7.2	32	32	33.63	215	FLAT TOP
36"	Solid	WTF36AHC	2/4	115	1/4	6	8.69	36	32	33.63	232	REMOVABLE
	Solid	WTF36AHC-FIP	2/4	115	1/4	6	8.69	36	32	33.63	246	FOAM
	Solid	WTF36AHC-FLT	2/4	115	1/2	6	8.69	36	32	29.63	218	FLAT TOP
48"	Solid	WTF48AHC	2/4	115	1/2	7	11.04	48	32	33.63	294	REMOVABLE
	Solid	WTF48AHC-FIP	2/4	115	1/2	7	11.04	48	32	33.63	214	FOAM
	Solid	WTF48AHC-FLT	2/4	115	1/2	7	11.04	48	32	29.63	246	FLAT TOP
60"	Solid	WTF60AHC	2/4	115	1/2	7	14.39	60	32	33.63	320	REMOVABLE
	Solid	WTF60AHC-FIP	2/4	115	1/2	7	14.39	60	32	33.63	340	FOAM
	Solid	WTF60AHC-FLT	2/4	115	1/2	7	14.39	60	32	29.63	320	FLAT TOP

NEW

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

BACKSPLASH OPTIONS	
SUFFIX	EXTERIOR
(standard)	Removable backsplash
FIP	4" foamed-in-place backsplash
FLT	Flat-top with no backsplash

AVAILABLE OPTIONS	
SUFFIX	OPTION
24	Left hand hinge doors
25	Glass doors
R	Remote models available
Append suffix to model # when placing order	

FREEZERS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
20"	Solid	WTF20HC	1/2	115	1/4	2.5	2.34	20	24.50	30.13	134	REMOVABLE
	Solid	WTF20HC-FIP	1/2	115	1/4	2.5	2.34	20	24.50	30.13	134	FOAM
	Solid	WTF20HC-FLT	1/2	115	1/4	2.5	2.34	20	24.50	26.13	134	FLAT TOP
27"	Solid	WTF27HC	1/2	115	1/4	2.5	5.25	27	29.88	33.63	185	REMOVABLE
	Solid	WTF27HC-FIP	1/2	115	1/4	2.5	5.25	27	29.88	33.63	192	FOAM
	Solid	WTF27HC-FLT	1/2	115	1/4	2.5	5.25	27	29.88	29.63	185	FLAT TOP

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

DUAL-TEMPS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
48"	Solid	WTRF48AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.31	48	32	33.63	302	REMOVABLE
		WTFR48AHC										
50"	Solid	WTRF50AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.76	50	32	33.63	307	REMOVABLE
		WTFR50AHC										
52"	Solid	WTRF52AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.76 R: 5.76	52	32	33.63	315	REMOVABLE
		WTFR52AHC										

"RF" in the model # designates refrigerator on the left, freezer on the right.

"FR" in the model # designates freezer on the left, refrigerator on the right.

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

NEW

WORKTOPS

Rear-Mounted Refrigeration


FREEZERS - DRAWERS - 29

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
27"	WTFD27AHC-2	2	—	115	1/4	2.5	6.13	27	32	33.63	218	REMOVABLE
	WTFD27AHC-2-FIP	2	—	115	1/4	2.5	6.13	27	32	33.63	218	FOAM
	WTFD27AHC-2-FLT	2	—	115	1/4	2.5	6.13	27	32	29.63	228	FLAT TOP
32"	WTFD32AHC-2	2	—	115	1/3+	4	7.2	32	32	33.63	248	REMOVABLE
	WTFD32AHC-2-FIP	2	—	115	1/3+	4	7.2	32	32	33.63	248	FOAM
	WTFD32AHC-2-FLT	2	—	115	1/3+	4	7.2	32	32	29.63	258	FLAT TOP
36"	WTFD36AHC-2	2	—	115	1/2	6	8.69	36	32	33.63	264	REMOVABLE
	WTFD36AHC-2-FIP	2	—	115	1/2	6	8.69	36	32	33.63	262	FOAM
	WTFD36AHC-2-FLT	2	—	115	1/2	6	8.69	36	32	29.63	264	FLAT TOP

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

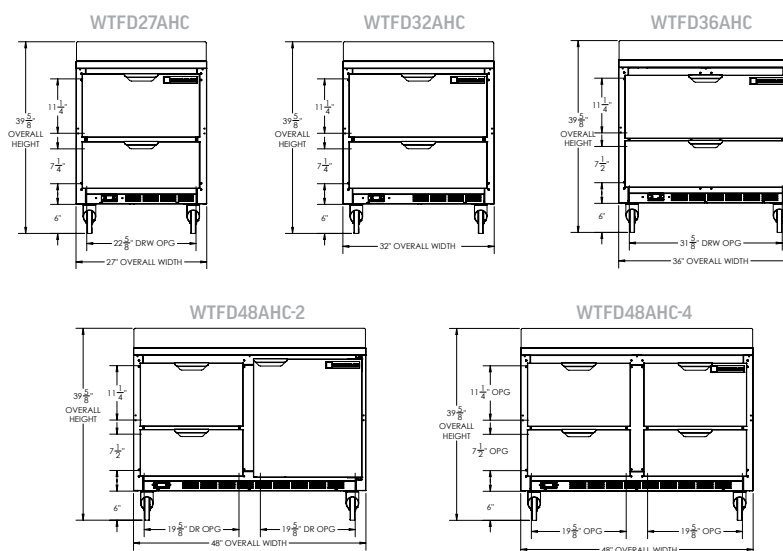



FREEZERS - DRAWERS - 29

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.


MODEL WIDTH	MODEL #	DRAWERS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
48"	WTFD48AHC-2	2	1/2	115	1/2	7	11.44	48	32	33.63	325	REMOVABLE
	WTFD48AHC-4	4	—	115	1/2	7	11.44	48	32	33.63	356	REMOVABLE
	WTFD48AHC-2-FIP	2	1/2	115	1/2	7	11.44	48	32	33.63	324	FOAM
	WTFD48AHC-4-FIP	4	—	115	1/2	7	11.44	48	32	33.63	356	FOAM
	WTFD48AHC-2-FLT	2	1/2	115	1/2	7	11.44	48	32	29.63	310	FLAT TOP
	WTFD48AHC-4-FLT	4	—	115	1/2	7	11.44	48	32	29.63	356	FLAT TOP
60"	WTFD60AHC-2	2	1/2	115	1/2	7	14.36	60	32	33.63	390	REMOVABLE
	WTFD60AHC-4	4	—	115	1/2	7	14.36	60	32	33.63	392	REMOVABLE
	WTFD60AHC-2-FIP	2	1/2	115	1/2	7	14.36	60	32	33.63	390	FOAM
	WTFD60AHC-4-FIP	4	—	115	1/2	7	14.36	60	32	33.63	392	FOAM
	WTFD60AHC-2-FLT	2	1/2	115	1/2	7	14.36	60	32	29.63	390	FLAT TOP
	WTFD60AHC-4-FLT	4	—	115	1/2	7	14.36	60	32	29.63	392	FLAT TOP

Depth measurement includes handles.


For total height, add 3 or 6 inches, based on your mounting choice.

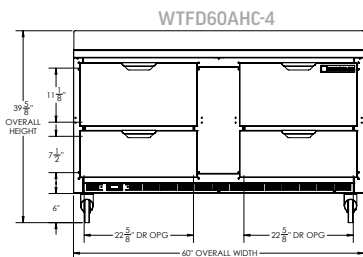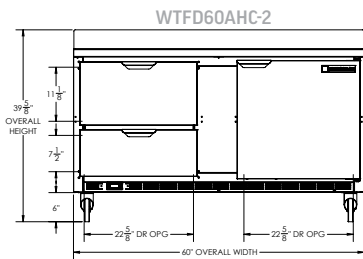


DRAWER PAN CONFIGURATIONS for WTRD and WTFD units




WTRD27 / WTRD32 / WTRD60
WTFD27 / WTFD32 / WTFD60



WTRD46 / WTRD67 / WTRD93 / WTRD119
WTFD46 / WTFD67 / WTFD93 / WTFD119

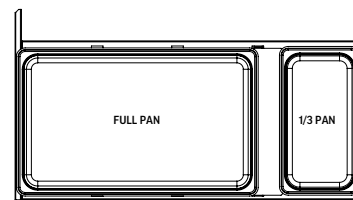

WTRD36 / WTFD36



WTRD46 / WTRD72 / WTFD48

WORKTOPS

Side-Mounted Refrigeration

REFRIGERATORS - DOORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
41"	Solid	WTR41AHC	1/2	115	1/6	2.2	7.94	41	34	33.5	290	FOAM
46"	Solid	WTR46AHC	1/2	115	1/6	3	10.8	46	34	33.5	325	FOAM
67"	Solid	WTR67AHC	2/4	115	1/5	3	18.97	67	34	33.5	400	FOAM
93"	Solid	WTR93AHC	3/6	115	1/3	5	29.7	93	34	33.5	528	FOAM
119"	Solid	WTR119AHC	4/8	115	1/3	5	40.12	119	34	33.5	675	FOAM

*Depth measurement includes handles.**For total height, add 3 or 6 inches, based on your mounting choice.*

AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
25	Glass doors
R	Remote models available
Append suffix to model # when placing order	

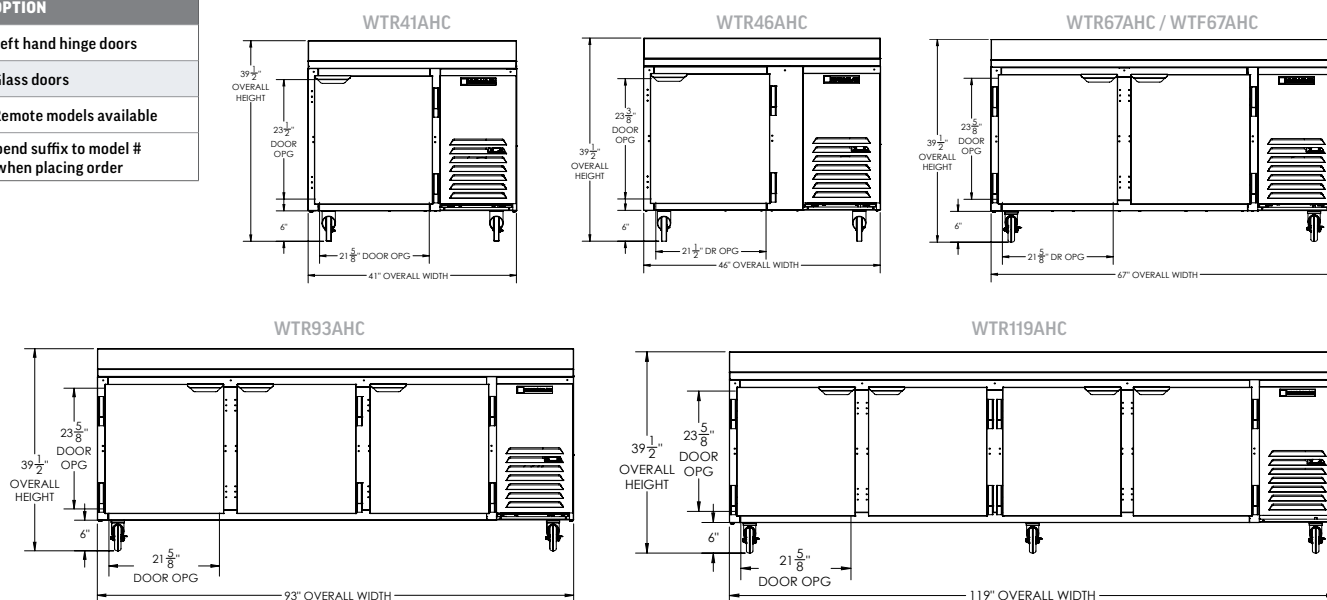

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
67"	Solid	WTF67AHC	2/4	115	3/4	8.9	20.8	67	34	33.50	431	FOAM

*Depth measurement includes handles.**For total height, add 3 or 6 inches, based on your mounting choice.*

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	BACK SPLASH
46"	WTRD46AHC-2	2	—	115	1/5	3	10.8	46	34	33.38	282	FOAM
67"	WTRD67AHC-2	2	1/2	115	1/5	3	18.97	67	34	33.38	435	FOAM
	WTRD67AHC-4	4	—	115	1/5	3	18.97	67	34	33.38	450	FOAM
93"	WTRD93AHC-2	2	2/4	115	1/3	5	29.7	93	34	33.38	562	FOAM
	WTRD93AHC-4	4	1/2	115	1/3	5	29.7	93	34	33.38	588	FOAM
	WTRD93AHC-6	6	—	115	1/3	5	29.7	93	34	33.38	606	FOAM
119"	WTRD119AHC-2	2	3/6	115	1/3	4.9	40.12	119	34	33.38	604	FOAM
	WTRD119AHC-4	4	2/4	115	1/3	4.9	40.12	119	34	33.38	604	FOAM
	WTRD119AHC-6	6	1/2	115	1/3	4.9	40.12	119	34	33.38	604	FOAM
	WTRD119AHC-8	8	—	115	1/3	4.9	40.12	119	34	33.38	604	FOAM

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.



UNDERCOUNTERS

Undercounter units feature a 1/2" thick sub-top

Full electronic control

Interior thermometer

Self-closing doors

with 120° stay-open feature, on cartridge style hinges

Easy door removal for service and cleaning

Magnetic gasket attached to each door

for positive seal

6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order

Two epoxy-coated steel wire shelves

per section

Field-reversible doors



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

MADE IN USA



3" CASTERS AVAILABLE
at no charge when specified at the
time of order



FIELD REVERSIBLE DOORS
for layout flexibility

ACCESS OPTIONS

- Doors
- Drawers

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless

AVAILABLE ACCESSORIES

- Bun tray rack
- Locks (doors only)
- Glass doors



AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

UNDERCOUNTERS

Rear-Mounted Refrigeration

REFRIGERATORS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
20"	Solid	UCR20HC	1/2	115	1/6	2	2.34	20	24.5	25.13	119
27"	Solid	UCR27HC	1/2	115	1/6	2	5.25	27	29.88	28.63	157
34"	Solid	UCR34HC	2/2	115	1/6	2	3.88	34	24.63	25.13	167



Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24"	Solid	UCR24AHC	1/2	115	1/6	2	4.48	24	32	28.63	164
27"	Solid	UCR27AHC	1/2	115	1/6	2	6.13	27	32	28.63	164
32"	Solid	UCR32AHC	1/2	115	1/6	2	7.2	32	32	28.63	190
36"	Solid	UCR36AHC	2/4	115	1/6	2	8.5	36	32	28.63	204
48"	Solid	UCR48AHC	2/4	115	1/6	2	11.82	48	32	28.63	252
60"	Solid	UCR60AHC	2/4	115	1/5	3	14.75	60	32	28.63	290
72"	Solid	UCR72AHC	3/6	115	1/5	3	17.88	72	32	28.63	336

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

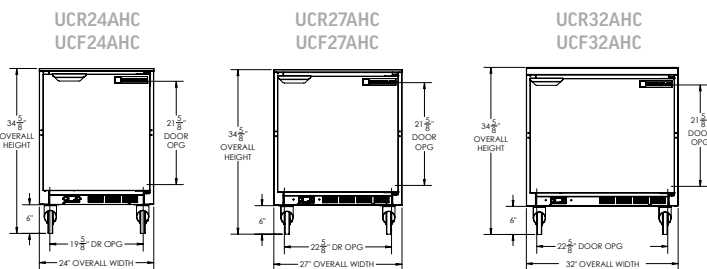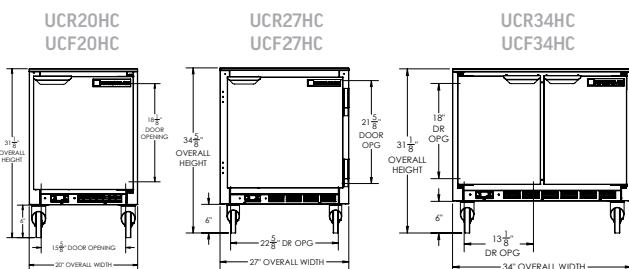

FREEZERS (SHALLOW DEPTH) - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
20"	Solid	UCF20HC	1/2	115	1/4	2.5	2.34	20	24.5	25.13	130
24"	Solid	UCF24HC	1/2	115	1/4	2.5	4.48	24	29.88	28.63	182
27"	Solid	UCF27HC	1/2	115	1/4	2.5	5.25	27	29.88	28.63	180

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.


MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24"	Solid	UCF24AHC	1/2	115	1/4	2.5	5.16	24	32	28.63	182
27"	Solid	UCF27AHC	1/2	115	1/4	2.5	6.13	27	32	28.63	178
32"	Solid	UCF32AHC	1/2	115	1/3+	4	7.2	32	32	28.63	206
36"	Solid	UCF36AHC	2/4	115	1/2	6	8.69	36	32	28.63	218
48"	Solid	UCF48AHC	2/4	115	1/2	7	11.04	48	32	28.63	272
60"	Solid	UCF60AHC	2/4	115	1/2	7	14.39	60	32	28.63	330

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.


AVAILABLE OPTIONS

SUFFIX	OPTION
24	Left hand hinge doors
25	Glass doors
R	Remote models available
Append suffix to model # when placing order	


UCR36AHC
UCF36AHC




UCR48AHC
UCF48AHC



UCR60AHC
UCF60AHC

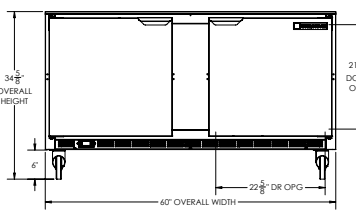

UCR72AHC

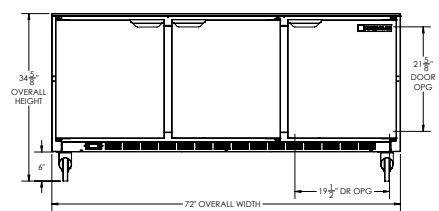

UNDERCOUNTERS

Rear-Mounted Refrigeration

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27"	UCRD27AHC-2	2	—	115	1/6	2	6.13	27	32	28.63	196
32"	UCRD32AHC-2	2	—	115	1/6	2	7.2	32	32	28.63	222
36"	UCRD36AHC-2	2	—	115	1/6	2	8.5	36	32.25	28.63	240
48"	UCRD48AHC-2	2	1/2	115	1/6	2.2	11.6	48	32	28.5	259
	UCRD48AHC-4	4	—	115	1/6	2.2	11.6	48	31.88	28.63	306
60"	UCRD60AHC-2	2	1/2	115	1/5	3	14.4	60	32	28.5	235
	UCRD60AHC-4	4	—	115	1/5	3	14.4	60	32	28.5	235
72"	UCRD72AHC-2	2	2/4	115	1/5	3	17.1	72	32	28.5	372
	UCRD72AHC-4	4	1/2	115				72	32	28.5	372
	UCRD72AHC-6	6	—	115				72	29.25	28.5	372

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - DRAWERS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27"	UCFD27AHC-2	2	—	115	1/4	2.5	6.13	27	32	28.63	196
32"	UCFD32AHC-2	2	—	115	1/3+	4	7.2	32	32	28.63	230
36"	UCFD36AHC-2	2	—	115	1/2	6	8.7	36	32.25	28.63	256
48"	UCFD48AHC-2	2	1/2	115	1/2	7	11.6	48	32	28.63	306
	UCFD48AHC-4	4	—	115	1/2	7	11.6	48	31.88	28.63	306
60"	UCFD60AHC-2	2	1/2	115	1/2	7	15.8	60	32	28.63	382
	UCFD60AHC-4	4	—	115	1/2	7	15.8	60	32	28.63	382

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

DUAL-TEMPS - DOORS


MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
48"	Solid	UCRF48AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.31	48	32	28.50	297
		UCFR48AHC									
50"	Solid	UCRF50AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.31 R: 5.76	50	32	28.63	298
		UCFR50AHC									
52"	Solid	UCRF52AHC	2/4	115	R: 1/6 F: 1/4	R: 2.0 F: 2.5	L: 5.76 R: 5.76	52	32	28.63	304
		UCFR52AHC									

NEW

"RF" in the model # designates refrigerator on the left, freezer on the right.
"FR" in the model # designates freezer on the left, refrigerator on the right.

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

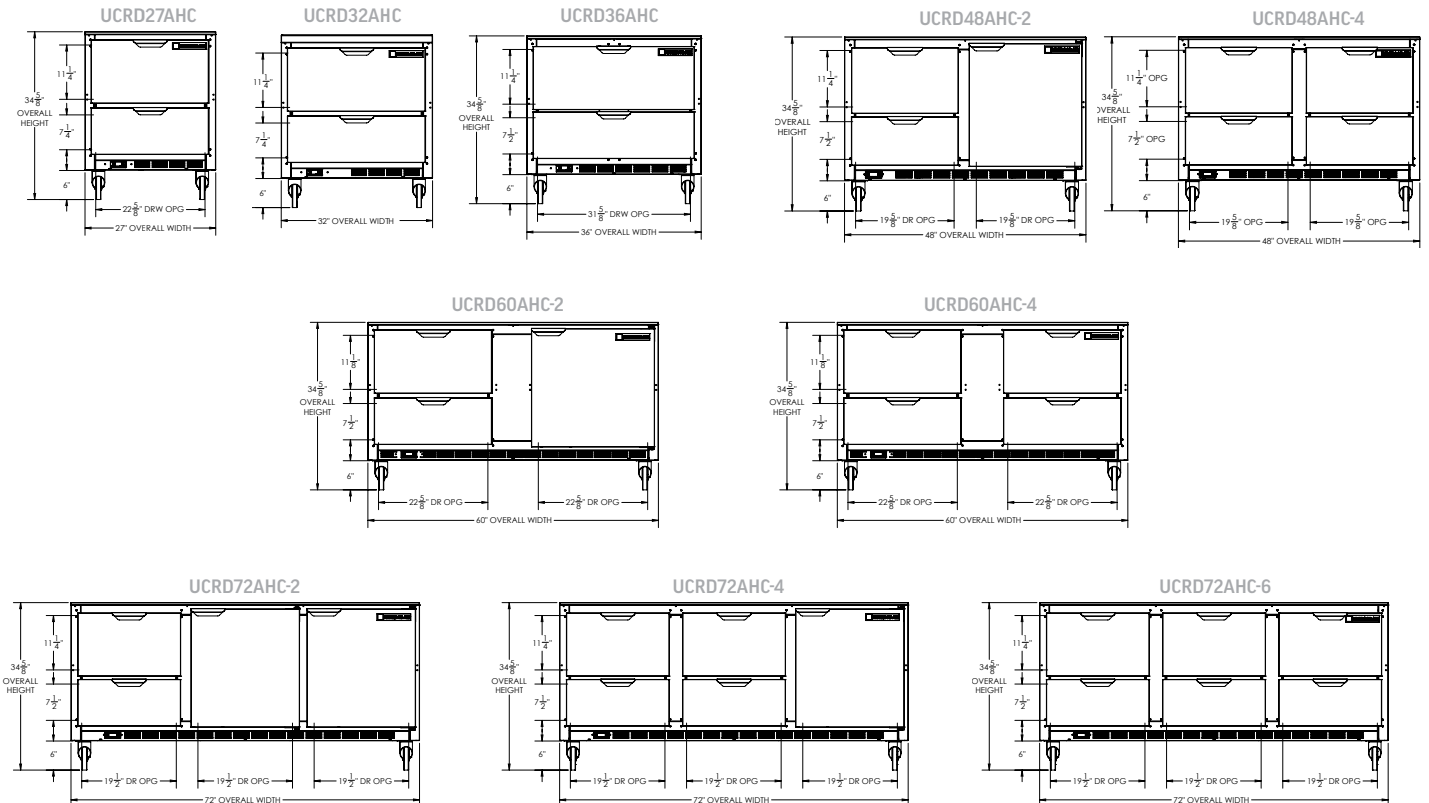

UNDERCOUNTERS


Side-Mounted Refrigeration

REFRIGERATORS - DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
41"	Solid	UCR41AHC	1/2	115	1/5	2.2	7.94	41	32.88	28.5	261
46"	Solid	UCR46AHC	1/2	115	1/5	3	10.8	46	32.88	28.5	281
67"	Solid	UCR67AHC	2/4	115	1/5	2.2	18.97	67	32.88	28.5	358
93"	Solid	UCR93AHC	3/6	115	1/3	5	29.7	93	32.88	28.5	468
119"	Solid	UCR119AHC	4/8	115	1/3	5	40.12	119	32.88	28.5	590

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

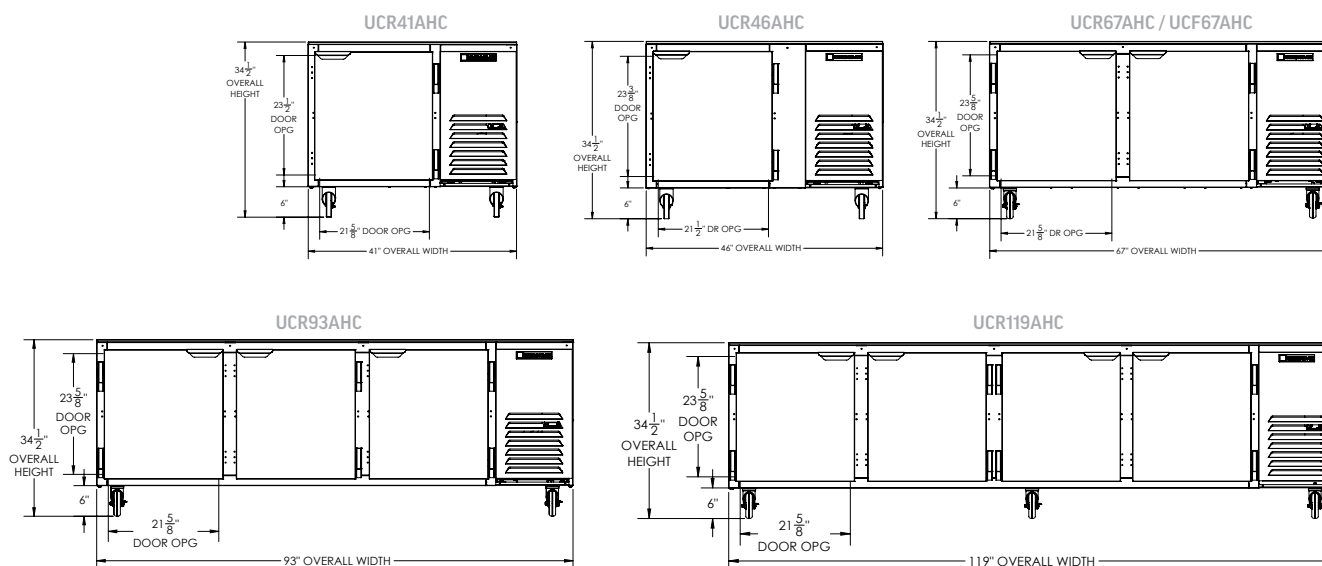

FREEZERS - DOORS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
67"	Solid	UCF67AHC	2/4	115	3/4	9	20.08	67	32.88	28.5	266

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	DOORS/SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
46"	UCRD46AHC-2	2	—	115	1/5	3	10.8	46	32	28.5	180
67"	UCRD67AHC-2	2	1/2	115	1/5	2.2	19.2	67	32	28.5	342
	UCRD67AHC-4	4	—	115	1/5	2.2	19.2	67	32	28.5	342
93"	UCRD93AHC-2	2	2/4	115	1/5	3	29.7	93	32.88	28.5	496
	UCRD93AHC-4	4	1/2	115	1/5	3	29.7	93	32	28.5	520
	UCRD93AHC-6	6	—	115	1/5	3	29.7	93	32.88	28.5	565
119"	UCRD119AHC-2	2	3/6	115	1/3	4.9	40.5	119	32	28.5	563
	UCRD119AHC-4	4	2/4	115	1/3	4.9	40.5	119	32	28.5	563
	UCRD119AHC-6	6	1/2	115	1/3	4.9	40.5	119	32	28.5	563
	UCRD119AHC-8	8	—	115	1/3	4.9	40.5	119	32	28.5	563

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.



Worktop & Undercounter Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR27A	403-826B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR27A	403-912D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR36A	403-911D-01
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR36A	403-915D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR48A	403-828B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR48A	403-913D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR60A	403-829D
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR60A	403-914D-01
Epoxy Coated Ctr Section Wire Shelf (Large)	UCR/WTR72A	403-827B
Epoxy Coated Wire Shelf L&R (Large)	UCR/WTR72A	403-828B
Epoxy Coated Ctr Section Wire Shelf (Small)	UCR/WTR72A	403-912D-01
Epoxy Coated Wire Shelf L&R (Small)	UCR/WTR72A	403-913D-01
Epoxy Coated Wire Shelf	UCR46A/67A, UCF67A	403-834D
Epoxy Coated Wire Shelf	UCR93A/119A	403-834D
Epoxy Coated Wire Shelf	WTR41/46/67A/93A	403-834D
Epoxy Coated Wire Shelf	WTR119A, WTF67A	403-834D
Epoxy Coated Wire Shelf	UCF/UCR/WTR20	403-419D
Epoxy Coated Wire Shelf	UCR/WTR34Y	403-339D
Epoxy Coated Wire Shelf	UCR/UCF/WTF/WTR27 Shallow Depth	403-294D
Shelf Clip	UCR/WTR/UCRD/WTRD	403-169A
Epoxy Coated Large Shelf	WTR27A/UCR27A	403-722C
Epoxy Coated Small Shelf	WTR27A/UCR27A	403-721C
Epoxy Coated Large Shelf	WTR36A, UCR36A	403-723C
Epoxy Coated Small Shelf	WTR36A, UCR36A	403-721C
Epoxy Coated Large Shelf	WTR48A/UCR48A	403-723C
Epoxy Coated Small Shelf	WTR48A/UCR48A	403-721C
Epoxy Coated Large Shelf	WTR60A/UCR60A	403-723C
Epoxy Coated Small Shelf	WTR60A/UCR60A	403-721C
Epoxy Coated Large Shelf	WTR72A/UCR72A	403-723C
Epoxy Coated Small Shelf	WTR72A/UCR72A	403-721C
STACKING COLLARS		
Stacking Collar	UCR20HC, UCF20HC	00C32-015A-01
Wall Mount Shelf	UCR20HC, UCF20HC (3/16" anchors recommended for mounting)	00A24-136D-05
Stacking Collar	UCR27AHC, UCF27AHC	00C32-012A

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
3" Caster	UCR20,UCF20,UCR27,UCF27,UCR34	00C31-041A
6" Caster	UCR20,UCF20,UCR27,UCF27,UCR34	00C31-038A
3" Caster	29" Undercounter/Worktop (set of four)	00C31-041A
6" Caster	29" Undercounter/Worktop (set of four)	00C31-038A
3" Caster	32" Undercounter/Worktop (set of four)	61C01-013A
6" Caster	32" Undercounter/Worktop (set of four)	61C01-001A
3" Caster	UCR/WTR 119A (set of six)	61C01-012A
6" Black Leg	29" Undercounter/Worktop (set of four)	58B02S001A
6" Black Leg	32" Undercounter/Worktop (set of four)	58B02S001A
6" Black Leg	UCR/WTR 119A (set of six)	58B02S002A
6" Seismic/Flanged Legs	29" WT/UC (set of four)	00C31-055A
6" Seismic/Flanged Legs	32" WT/UC (set of four)	00C31-055A
6" Seismic/Flanged Legs	UC Shallow Depth (set of four)	00C31-055A
2 3/4 in Caster Kit	WT/UC	00C31-049A
2" Roller Kit	WT/UC	00C31S045A

WORKTOP WHITE POLY CUTTING BOARDS (1/2" THICK)		
Set of (2) Brackets Required	All Units	00C23-076A-01
29" Cutting Board	WTR27A/WTF27A	705-397D-05
29" Cutting Board	WTR36A/WTF36A	705-397D-19
29" Cutting Board	WTR48A/WTF48A	705-397D-06
29" Cutting Board	WTR60A/WTF60A	705-397D-07

COMPOSITE CUTTING BOARDS (1/2" THICK)		
Set of (2) Brackets Required	All Units	00C23-076A-01
Composite Cutting Board	WTR27A/WTF27A	705-397D-03
Composite Cutting Board	WTR36A/WTF36A	705-397D-17
Composite Cutting Board	WTR41	705-397D-18
Composite Cutting Board	WTR48A/WTF48A	705-397D-02
Composite Cutting Board	WTR60A/WTF60A	705-397D-04
Composite Cutting Board	WTR72A	705-397D-01

ADDITIONAL ACCESSORIES		
Door Lock	UCR,WTR (per door)	00C30-099A
Digital Thermometer	WT,UC	402-249A





CHEF BASES

AMPLE COLD STORAGE WHILE SUPPORTING WORK SPACES

CHEF BASES

Fire-proof 16-gauge stainless steel top

Reinforced with 2" CFC & HCFC-free foam insulation

No heat shield required

Must adhere to proper clearance per owners manual

Full marine edge on standard size models

to prevent spills from dripping over the edge

Full electronic temperature control

Top & bottom drawers accommodates 6" deep pans

to provide ample food product storage

Drawers have a dynamic load rating of 275 lbs per drawer

12-gauge drawer slides

with 3 Delrin encased stainless steel roller bearings per each drawer slides

Self-closing drawer feature

engages in the last 1-2" of travel ensuring a perfect seal every time

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order

Made in the USA



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY

LIFETIME WARRANTY ON ALL DRAWERS AND SLIDES



12-GAUGE DRAWER SLIDES
with 3 Delrin encased stainless steel roller bearings per each drawer slide



ACCOMMODATES 6" PANS IN
top and bottom drawers

ACCESS OPTIONS

- Drawers

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Stainless steel with galvanized back

INTERIOR FINISHES

- Corrosion-resistant aluminum

AVAILABLE ACCESSORIES

- Custom flat top sizes available, up to 12" overhang on either side to create a custom sized top
- Gasket guards



AVAILABLE OPTIONS

- Flat Top edge in lieu of marine edge on standard sizes
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

CHEF BASES

REFRIGERATORS - DRAWERS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DRAWERS	VOLTS	HP	AMPS	CUBIC FEET	TOP WIDTH	CABINET WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36"	WTRCS36D-1	2	115	1/4	5	5.67	36	36	34.75	20.63	334
	WTRCS36D-1-48						48	36	34.75	20.63	346
48"	WTRCS48D-1	2	115	1/3	4.5	7.02	48	48	34.75	20.63	368
52"	WTRCS52D-1	2	115	1/3	4.5	8.99	52	52	34.75	20.63	380
60.5"	WTRCS60D-1	2	115	1/3	4.5	10.29	60.50	60.50	34.75	20.63	450
	WTRCS60D-1-64						64	60.50	34.75	20.63	458
72"	WTRCS72D-1	4	115	1/3	4.5	14.29	72	72	34.75	20.63	580
	WTRCS72D-1-76						76	72	34.75	20.63	600
84"	WTRCS84D-1	4	115	1/3	4.5	17.37	84	84	34.75	20.63	636
	WTRCS84D-1-89						89	84	34.75	20.63	648
	WTRCS84D-1-96						96	84	34.75	20.63	680
	WTRCS84D-1-108						108	84	34.75	20.63	680
112"	WTRCS112D-1	6	115	1/2	7.3	22.11	112	112	34.75	20.63	772
	WTRCS112D-1-120						120	112	34.75	20.63	772

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

CHEF BASE ACCESSORIES

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
3" Caster	WTRCS Series	00C26-017A
ADDITIONAL ACCESSORIES		
Gasket Guard	WTRCS36	00B23S041D-02
Gasket Guard	WTRCS60	00B23S041D-01
Gasket Guard	WTRCS72	00B23S041D-03
Additional Gasket Guards available for other sizes of Chef Bases.		


FREEZERS - DRAWERS

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

MODEL WIDTH	MODEL #	DRAWERS	VOLTS	HP	AMPS	CUBIC FEET	TOP WIDTH	CABINET WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36"	WTFC36D-1	2	115	1/2	5	5.67	36	36	34.75	20.63	336
	WTFC36D-1-48						48	36	34.75	20.63	346
52"	WTFC52D-1	2	115	3/4	10.6	8.99	52	52	34.75	20.63	408
60.5"	WTFC60D-1	2	115	3/4	10.6	10.29	60.50	60.50	34.75	20.63	500
	WTFC60D-1-64						64	60.50	34.75	20.63	500
72"	WTFC72D-1	4	115	3/4	10.6	14.29	72	72	34.75	20.63	594
	WTFC72D-1-76						76	72	34.75	20.63	600
84"	WTFC84D-1	4	115	3/4	10.6	17.37	84	84	34.75	20.63	636
	WTFC84D-1-89						89	84	34.75	20.63	636
	WTFC84D-1-96						96	84	34.75	20.63	678
	WTFC84D-1-108						108	84	34.75	20.63	678

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.



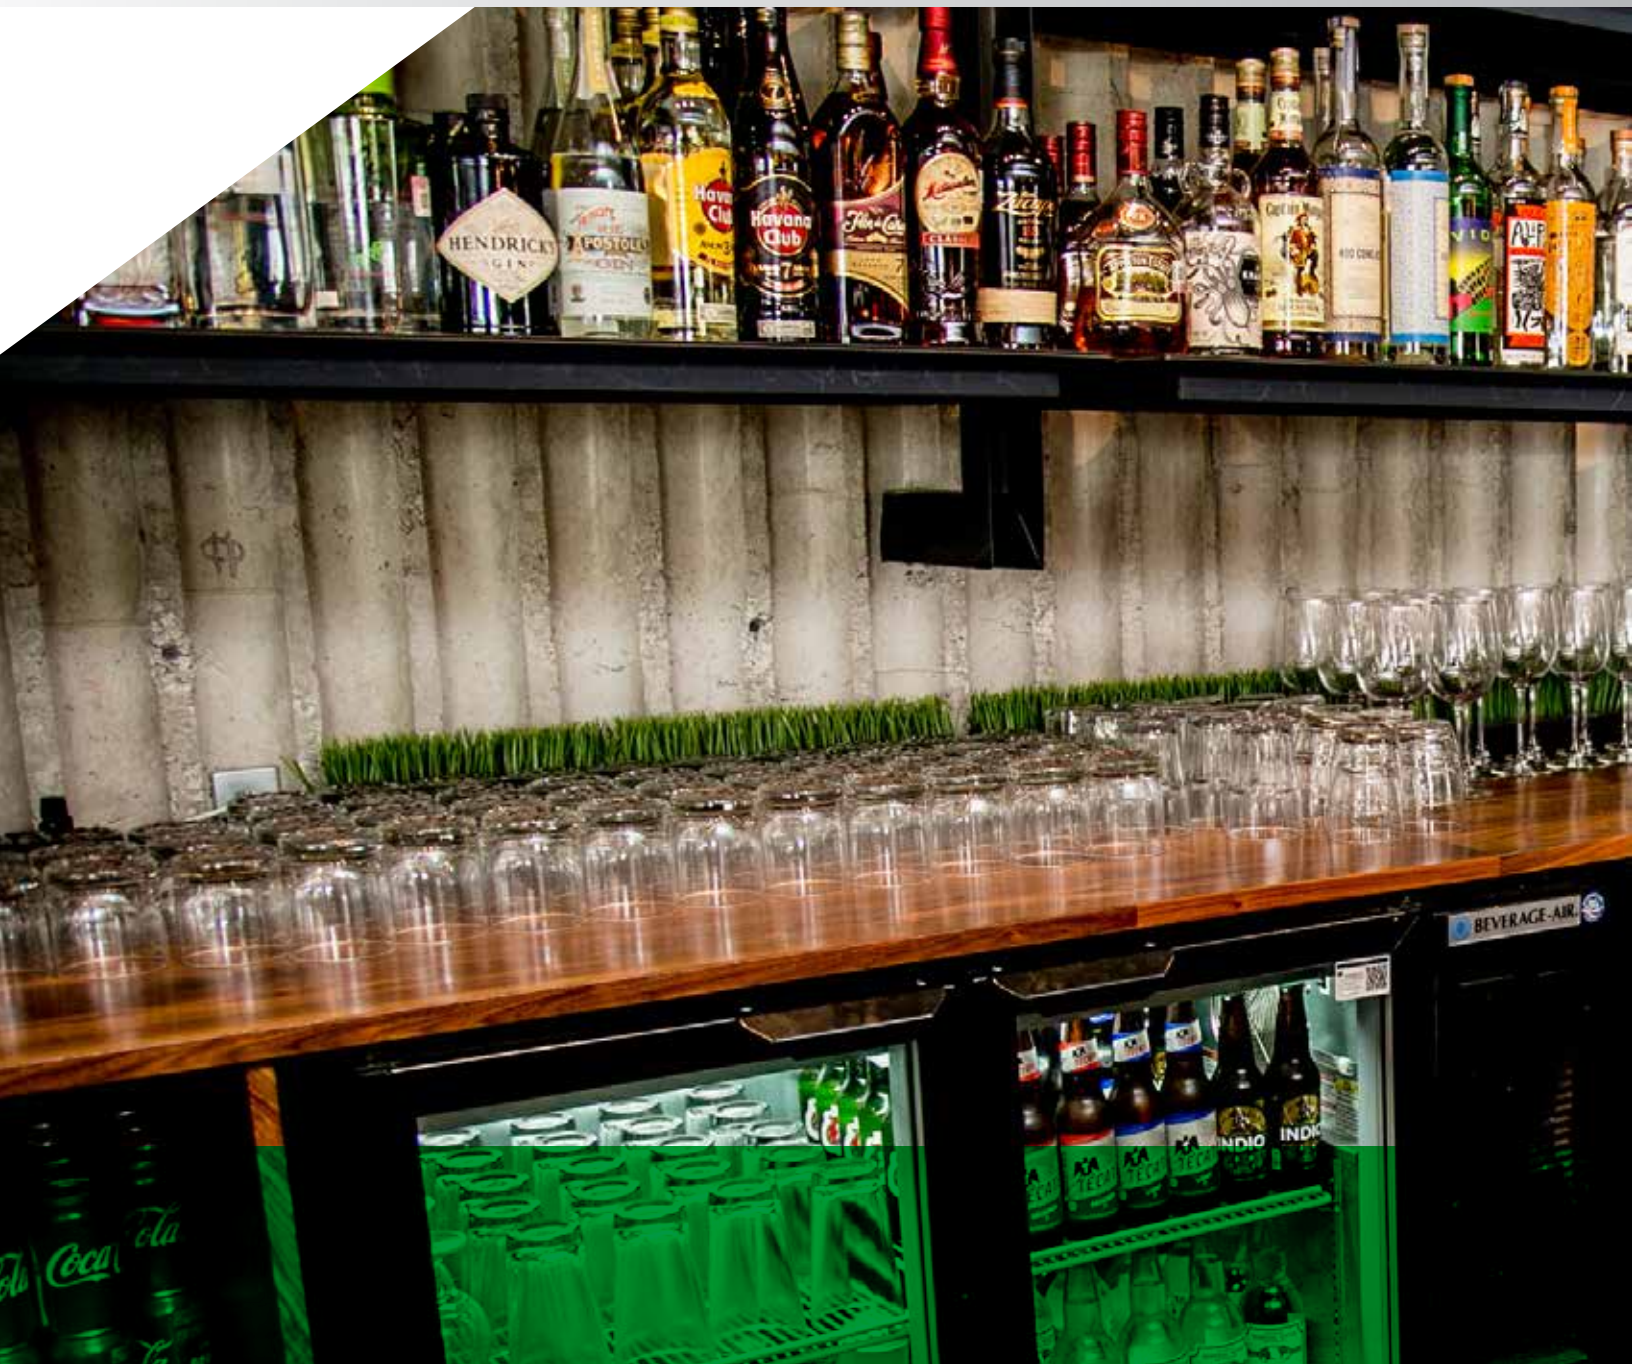



BAR & WINE EQUIPMENT

DYNAMIC PERFORMANCE THAT ENHANCES THE FRONT OF THE HOUSE

DIRECT DRAWS

3-IN-1 DRAFT SOLUTIONS

Dispense beer, wine, or coffee (other non-alcoholic beverages) with the same tap—no line/manifold changes needed!



Stainless steel top with drip tray

Galvanized steel interior liner
with heavy duty stainless steel floor

Full electronic control

Drain tube located at bottom front of cooler
connects to floor drain

Self-closing doors with locks

Magnetic gasket attached to each door
for positive seal

Field reversible door

Compressor available on left or right side
specify at time of order

WIDE VARIETY OF OPTIONS AND ACCESSORIES

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

MADE IN USA



LEFT OR RIGHT COMPRESSOR
Specify which side the compressor
should be located at time of order



DRAIN TUBE
bottom front of cooler (condensor side)
and connects directly to floor drain

ACCESS OPTIONS

- Doors

AGENCY CERTIFICATIONS



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	FINISH
24"	DD24HC-1-B	1	115	1/6	2	7.66	24	30.13	37.75	174	1	BLACK
	DD24HC-1-S									184	1	STAINLESS FRONT
36"	DD36HC-1-B	1	115	1/4	3.2	8.31	36	24.5	36	250	1	BLACK
	DD36HC-1-S									242	1	STAINLESS
48"	DD48HC-1-B	2	115	1/4	2.50	12.4	48	24.5	36	284	2	BLACK
	DD48HC-1-S										2	STAINLESS
50.5"	DD50HC-1-B	2	115	1/4	2.50	17.86	50.5	29	37.25	290	2	BLACK
	DD50HC-1-S									310	2	STAINLESS FRONT
	DD50HC-1-C-B	2	115	1/4	2.50	17.86	50.5	29	37.25	310	2	BLACK
	DD50HC-1-C-S									310	2	STAINLESS FRONT
59"	DD58HC-1-B	2	115	1/4	2.50	21.86	59	29	37.38	342	3	BLACK
	DD58HC-1-S									376	3	STAINLESS FRONT
	DD58HC-1-C-B	2	115	1/4	2.50	21.86	59	29	37.38	342	3	BLACK
	DD58HC-1-C-S									342	3	STAINLESS FRONT
69"	DD68HC-1-B	2	115	1/3	5.5	25.93	69	29	37.25	380	3	BLACK
	DD68HC-1-S									379	3	STAINLESS FRONT
	DD68HC-1-C-B	2	115	1/3	5.5	25.93	69	29	37.25	400	3	BLACK
	DD68HC-1-C-S									400	3	STAINLESS FRONT
72"	DD72HC-1-B	3	115	1/3	3.1	19.95	72	24.5	36	424	3	BLACK
	DD72HC-1-S									376	3	STAINLESS
79"	DD78HC-1-B	3	115	1/3	5.5	33.59	79	29	37.38	400	4	BLACK
	DD78HC-1-S									400	4	STAINLESS FRONT
	DD78HC-1-B-12T	3	115	1/3	5.5	33.59	79	29	37.38	478	4	BLACK
	DD78HC-1-S-12T									478	4	STAINLESS FRONT
95"	DD94HC-1-B	3	115	1/3	5.5	37.82	95	29	37.38	458	5	BLACK
	DD94HC-1-S									458	5	STAINLESS FRONT
	DD94HC-1-B-12T	3	115	1/3	5.5	37.82	95	29	37.38	532	5	BLACK
	DD94HC-1-S-12T									458	5	STAINLESS FRONT

Depth measurement includes handles.
Height measurement includes mounting height (DD24 only), but excludes tap height. Add average tap height of 15" for total unit height.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized walls with reinforced stainless steel floor

AVAILABLE ACCESSORIES

- Wine Models
- Wine Taps
- Faucet Locks
- Glass Rinser
- 1-6 Insulated Stainless Towers/Taps
- Optional 12 Tap Tower for 94" Models
- Dual Tap Placement Option
- No Draft Arm with Hole Cover

AVAILABLE OPTIONS

- Left or right side compressor
- Remote models available


MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs


DIRECT DRAWS

Keg Capacities


BM23 / DD24 / DD36

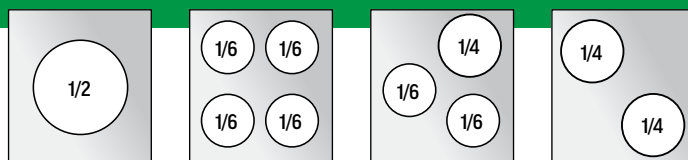


DD48 / DD50

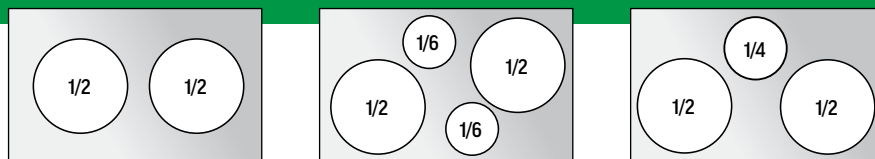


DD58 / DD68 / DD72

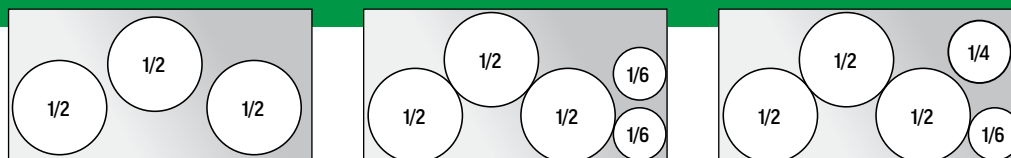

DD78

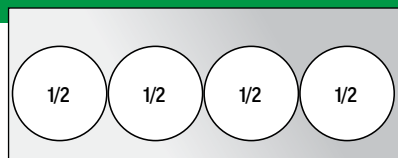

DD94

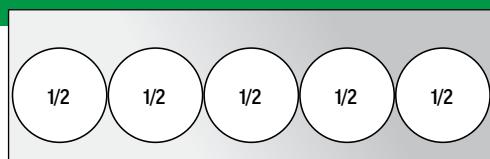

RC-500 SERIES RAPID CHILL GLASS FROSTER

Freeze any type of glass in a flash

**Ideal for chilling beer, champagne, wine,
and cocktail glasses**

Also ideal for chilling the exterior of bottles

**Simply push down on the froster head
to dispense jet of CO2**

Neon, color changing lights illuminate the glass as you frost

Does not taint the taste of drinks

RC-500 mounts to any table or bar counter

**Sterilizes the glass due to the cooling process, for a more
hygienic drink service**

Will not affect the carbonation or temperature of drinks

**No need for electrical connection, for greater portability
and practicality**

LED lights require (2) AA batteries

**Requires food grade CO2 cylinders
with liquid dip tube (siphon tank)**

MODEL #	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
RC-500	10.63	5.11	16.14	12



BAR MOBILES

Stainless steel drip tray for easy cleaning

Heavy-duty stainless steel floor

Stainless steel top with black glass rails

4" casters

Full electronic control

Interior thermometer

Tower has continuous source of cold air

Portable unit with waste bottle

for beer and wine from drain

Self-closing doors with locks

Field-reversible door

Magnetic gasket attached to each door

for positive seal



WIDE VARIETY OF OPTIONS AND ACCESSORIES

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

MADE IN USA



PORTABLE WASTE BOTTLE
for beer and wine from drain



STAINLESS STEEL DRIP TRAY
for easy cleaning

ACCESS OPTIONS

- Doors

AGENCY CERTIFICATIONS



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEYS	FINISH
24"	BM23HC-B	1	115	1/6	2	7.66	24	30.13	53	176	1	BLACK
	BM23HC-B-28	1	115	1/6	2	7.66	24	30.13	39.37	174	1	BLACK
	BM23HC-S-31	1	115	1/6	2	7.66	24	30.13	53	180	1	STAINLESS
	BM23HC-C-B	1	115	1/6	2	7.66	24	30.13	53.25	180	1	BLACK
	BM23HC-C-S	1	115	1/6	2	7.66	24	30.13	53.25	186	1	STAINLESS

Depth measurement includes handles.

Height measurement includes mounting height and tap height if applicable.

DUAL ZONE

LEFT COMPARTMENT MAINTAINS 32-40°F.
RIGHT COMPARTMENT MAINTAINS 50-65°F.

MODEL WIDTH	MODEL #	DOORS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEYS	FINISH
24"	DZ24-1-B	1	115	1/5	4	7.12	24	29.38	53	220	(4) 1/6	BLACK
	DZ24-1-S											STAINLESS

Not intended for beer/beer configuration.

Depth measurement includes handles.

Height measurement includes mounting height and tap height.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Club top
- 1-4 insulated stainless towers/taps
- Wine models available
- 2, 3, or 4-way manifolds
- Faucet locks
- No draft arm with hole cover

AVAILABLE OPTIONS

- Outdoor approved unit available (BM23 only)

MOUNTING OPTIONS

- 4" casters

BACK BAR COOLERS

Galvanized Steel Interior

Stainless Steel Floor

Full electronic control

Compressor Available on Left or Right Side
specify at time of order

LED Lighting

Two Epoxy Coated Shelves per section

Stay Open Door and Locks

Field Reversible Doors
on select models

Sliding Glass Doors
on select models (door frames only come in black)

Pass Thru Models Available

Magnetic gasket attached to each door
for positive seal



WIDE VARIETY OF OPTIONS AND ACCESSORIES

**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**

MADE IN USA



LEFT OR RIGHT COMPRESSOR
Specify which side the compressor
should be located at time of order



OPEN FOOD RATED MODELS
for increased storage options

ACCESS OPTIONS

- Hinge doors
- Slide doors
- Pass-thru

AGENCY CERTIFICATIONS





EXTERIOR FINISHES

- Black
- Stainless Steel front/sides
- Stainless steel front with continuous coil coated sides

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Wine models available
- Food rated models
- Glass door
- Stainless steel top and galvanized sub-tops available
- Extra shelves



AVAILABLE OPTIONS

- Left or right side compressor
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs

BACK BAR COOLERS

Standard

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-B	1/2	115	1/6	2	7.66	24	30.13	37.75	186	1	180	140	110	BLACK
	BB24HC-1-S									188	1	180	140	110	STAINLESS FRONT
36"	BB36HC-1-B	1/2	115	1/4	2.5	8.31	36	24.5	34	228	1	240	220	170	BLACK
	BB36HC-1-S									243	1	240	220	170	STAINLESS
	BB36HC-1-B-27	1/2	115	1/4	2.5	8.31	36	24.5	36	232	1	240	220	170	BLACK
	BB36HC-1-S-27									243	1	240	220	170	STAINLESS
48"	BB48HC-1-B	2/4	115	1/4	2.5	12.4	48	24.5	34	270	2	288	300	325	BLACK
	BB48HC-1-S									306	2	288	300	325	STAINLESS
	BB48HC-1-B-27	2/4	115	1/4	2.5	12.4	48	24.5	36	297	2	288	300	325	BLACK
	BB48HC-1-S-27									292	2	288	300	325	STAINLESS
59"	BB58HC-1-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	350	2	528	440	365	BLACK
	BB58HC-1-S									354	2	528	440	365	STAINLESS FRONT
69"	BB68HC-1-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	401	3	672	550	435	BLACK
	BB68HC-1-S									401	3	672	550	435	STAINLESS FRONT
72"	BB72HC-1-B	3/6	115	1/3	3.1	19.92	72	24.5	34	325	3	540	480	505	BLACK
	BB72HC-1-S									359	3	540	480	505	STAINLESS
	BB72HC-1-B-27	3/6	115	1/3	3.1	19.92	72	24.5	36	325	3	540	480	505	BLACK
	BB72HC-1-S-27									359	3	540	480	505	STAINLESS
79"	BB78HC-1-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	448	4	740	630	560	BLACK
	BB78HC-1-S									444	4	740	630	560	STAINLESS FRONT
95"	BB94HC-1-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	494	5	920	785	675	BLACK
	BB94HC-1-S									494	5	920	785	675	STAINLESS FRONT

Depth measurement includes handles.
BB24 height measurement includes mounting height.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available
Append suffix to model # when placing order. Ex: BB36HC-1-S-27	

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-G-B	1/2	115	1/6	2	7.66	24	30.13	37.75	192	1	180	140	110	BLACK
	BB24HC-1-G-S									202	1	180	140	110	STAINLESS FRONT
36"	BB36HC-1-G-B	1/2	115	1/4	2.5	8.36	36	24.50	34	232	1	240	220	170	BLACK
	BB36HC-1-G-S									243	1	240	220	170	STAINLESS
	BB36HC-1-G-B-27	1/2	115	1/4	2.5	8.36	36	24.50	36	244	1	240	220	170	BLACK
	BB36HC-1-G-S-27									243	1	240	220	170	STAINLESS
48"	BB48HC-1-G-B	2/4	115	1/4	2.5	12.4	48	24.50	34	286	2	288	300	325	BLACK
	BB48HC-1-G-S														STAINLESS
	BB48HC-1-G-B-27	2/4	115	1/4	2.5	12.4	48	24.50	36	296	2	288	300	325	BLACK
	BB48HC-1-G-S-27														STAINLESS
59"	BB58HC-1-G-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	354	2	528	440	365	BLACK
	BB58HC-1-G-S														STAINLESS FRONT
69"	BB68HC-1-G-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	401	3	672	550	435	BLACK
	BB68HC-1-G-S														STAINLESS FRONT
72"	BB72HC-1-G-B	3/6	115	1/3	3.1	19.92	72	24.50	34	375	3	540	480	505	BLACK
	BB72HC-1-G-S									388	3	540	480	505	STAINLESS
	BB72HC-1-G-B-27	3/6	115	1/3	3.1	19.92	72	24.50	36	375	3	540	480	505	BLACK
	BB72HC-1-G-S-27									381	3	540	480	505	STAINLESS
79"	BB78HC-1-G-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	444	4	740	630	560	BLACK
	BB78HC-1-G-S														STAINLESS FRONT
95"	BB94HC-1-G-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	544	5	920	785	675	BLACK
	BB94HC-1-G-S														STAINLESS FRONT

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-GS-B	2/4	115	1/4	2.5	12.4	48	23.63	34	278	2	288	300	325	BLACK
	BB48HC-1-GS-S									306	2	288	300	325	STAINLESS
	BB48HC-1-GS-B-27	2/4	115	1/4	2.5	12.4	48	23.63	36	292	2	288	300	325	BLACK
	BB48HC-1-GS-S-27									306	2	288	300	325	STAINLESS
59"	BB58HC-1-GS-B	2/4	115	1/4	2.5	21.86	59	28.25	37.25	354	2	528	440	365	BLACK
	BB58HC-1-GS-S														STAINLESS FRONT
72"	BB72HC-1-GS-B	3/6	115	1/3	3.1	19.92	72	23.63	34	381	3	540	480	505	BLACK
	BB72HC-1-GS-S														STAINLESS
	BB72HC-1-GS-B-27	3/6	115	1/3	3.1	19.92	72	23.63	36	381	3	540	480	505	BLACK
	BB72HC-1-GS-S-27														STAINLESS

Depth measurement includes handles.
BB24 height measurement includes mounting height.

BACK BAR COOLERS

Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	306	2	288	300	325	BLACK
	BB48HC-1-PT-S														STAINLESS
	BB48HC-1-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	306	2	288	300	325	BLACK
72"	BB72HC-1-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	381	3	540	480	505	BLACK
	BB72HC-1-PT-S														STAINLESS
	BB72HC-1-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	359	3	540	480	505	BLACK
	BB72HC-1-PT-S-27														STAINLESS

Depth measurement includes handles.



GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-G-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	316	2	288	300	325	BLACK
	BB48HC-1-G-PT-S														STAINLESS
	BB48HC-1-G-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	334	2	288	300	325	BLACK
	BB48HC-1-G-PT-S-27														STAINLESS
72"	BB72HC-1-G-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	425	3	540	480	505	BLACK
	BB72HC-1-G-PT-S														STAINLESS
	BB72HC-1-G-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	425	3	540	480	505	BLACK
	BB72HC-1-G-PT-S-27														STAINLESS

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-GS-PT-B	4/4	115	1/3	3.1	13.6	48	25.75	34	316	2	288	300	325	BLACK
	BB48HC-1-GS-PT-S														STAINLESS
	BB48HC-1-GS-PT-B-27	4/4	115	1/3	3.1	13.6	48	25.75	36	316	2	288	300	325	BLACK
	BB48HC-1-GS-PT-S-27														STAINLESS
72"	BB72HC-1-GS-PT-B	6/6	115	1/3	3.1	22.1	72	23.75	34	408	3	540	480	505	BLACK
	BB72HC-1-GS-PT-S														STAINLESS
	BB72HC-1-GS-PT-B-27	6/6	115	1/3	3.1	22.1	72	23.75	36	448	3	540	480	505	BLACK
	BB72HC-1-GS-PT-S-27														STAINLESS

Depth measurement includes handles.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available

Append suffix to model # when placing order. Ex: BB36HC-1-S-27

BACK BAR COOLERS

Food Rated

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-F-B	1/2	115	1/6	2	7.66	24	30.13	37.75	200	1	180	140	110	BLACK
	BB24HC-1-F-S														STAINLESS FRONT
36"	BB36HC-1-F-B	1/2	115	1/4	2.5	8.31	36	24.5	34	232	1	240	220	170	BLACK
	BB36HC-1-F-S														STAINLESS
	BB36HC-1-F-B-27	1/2	115	1/4	2.5	8.31	36	24.5	36	243	1	240	220	170	BLACK
	BB36HC-1-F-S-27														STAINLESS
48"	BB48HC-1-F-B	2/4	115	1/4	2.5	12.4	48	24.5	34	284	2	288	300	325	BLACK
	BB48HC-1-F-S														STAINLESS
	BB48HC-1-F-B-27	2/4	115	1/4	2.5	12.4	48	24.5	36	320	2	288	300	325	BLACK
	BB48HC-1-F-S-27														STAINLESS
59"	BB58HC-1-F-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	354	2	528	440	365	BLACK
	BB58HC-1-F-S														STAINLESS FRONT
69"	BB68HC-1-F-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	410	3	672	550	435	BLACK
	BB68HC-1-F-S														STAINLESS FRONT
72"	BB72HC-1-F-B	3/6	115	1/3	3.1	19.92	72	24.50	34	325	3	540	480	505	BLACK
	BB72HC-1-F-S														STAINLESS
	BB72HC-1-F-B-27	3/6	115	1/3	3.1	19.92	72	24.50	36	325	3	540	480	505	BLACK
	BB72HC-1-F-S-27														STAINLESS
79"	BB78HC-1-F-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	375	4	740	630	560	BLACK
	BB78HC-1-F-S														STAINLESS FRONT
95"	BB94HC-1-F-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	510	5	920	785	675	BLACK
	BB94HC-1-F-S														STAINLESS FRONT

Depth measurement includes handles.
BB24 height measurement includes mounting height.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available
Append suffix to model # when placing order. Ex: BB36HC-1-S-27	

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
24"	BB24HC-1-FG-B	1/2	115	1/6	2	7.66	24	30.13	37.75	200	1	180	140	110	BLACK
	BB24HC-1-FG-S														STAINLESS FRONT
36"	BB36HC-1-FG-B	1/2	115	1/4	2.5	8.36	36	24.50	34	250	1	240	220	170	BLACK
	BB36HC-1-FG-S														STAINLESS
	BB36HC-1-FG-B-27	1/2	115	1/4	2.5	8.36	36	24.50	36	250	1	240	220	170	BLACK
	BB36HC-1-FG-S-27														STAINLESS
48"	BB48HC-1-FG-B	2/4	115	1/4	2.5	12.4	48	24.50	34	320	2	288	300	325	BLACK
	BB48HC-1-FG-S														STAINLESS
	BB48HC-1-FG-B-27	2/4	115	1/4	2.5	12.4	48	24.50	36	320	2	288	300	325	BLACK
	BB48HC-1-FG-S-27														STAINLESS
59"	BB58HC-1-FG-B	2/4	115	1/4	2.5	21.86	59	29.13	37.25	354	2	528	440	365	BLACK
	BB58HC-1-FG-S														STAINLESS FRONT
69"	BB68HC-1-FG-B	2/4	115	1/3	5.3	25.93	69	29.13	37.25	401	3	672	550	435	BLACK
72"	BB72HC-1-FG-B	3/6	115	1/3	3.1	19.92	72	24.50	34	325	3	540	480	505	BLACK
	BB72HC-1-FG-S														STAINLESS
	BB72HC-1-FG-B-27	3/6	115	1/3	3.1	19.92	72	24.50	36	410	3	540	480	505	BLACK
	BB72HC-1-FG-S-27														STAINLESS
79"	BB78HC-1-FG-B	3/6	115	1/3	5.5	33.59	79	29.13	37.25	476	4	740	630	560	BLACK
	BB78HC-1-FG-S														STAINLESS FRONT
95"	BB94HC-1-FG-B	3/6	115	1/3	5.5	37.82	95	29.13	37.25	544	5	920	785	675	BLACK
	BB94HC-1-FG-S														STAINLESS FRONT

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-F-GS-B	2/4	115	1/4	2.5	12.4	48	23.63	34	284	2	288	300	325	BLACK
	BB48HC-1-F-GS-S														STAINLESS
	BB48HC-1-F-GS-B-27	2/4	115	1/4	2.5	12.4	48	23.63	36	300	2	288	300	325	BLACK
	BB48HC-1-F-GS-S-27														STAINLESS
59"	BB58HC-1-F-GS-B	2/4	115	1/4	2.5	21.86	59	28.25	37.25	352	2	528	440	365	BLACK
72"	BB72HC-1-F-GS-B	3/6	115	1/3	3.1	19.92	72	23.63	34	392	3	540	480	505	BLACK
	BB72HC-1-F-GS-S														STAINLESS
	BB72HC-1-F-GS-B-27	3/6	115	1/3	3.1	19.92	72	23.63	36	392	3	540	480	505	BLACK
	BB72HC-1-F-GS-S-27														STAINLESS

Depth measurement includes handles.
BB24 height measurement includes mounting height.

BACK BAR COOLERS

Food Rated Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-F-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	302	2	288	300	325	BLACK
	BB48HC-1-F-PT-S														STAINLESS
	BB48HC-1-F-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	302	2	288	300	325	BLACK
	BB48HC-1-F-PT-S-27														STAINLESS
72"	BB72HC-1-F-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	375	3	540	480	505	BLACK
	BB72HC-1-F-PT-S														STAINLESS
	BB72HC-1-F-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	375	3	540	480	505	BLACK
	BB72HC-1-F-PT-S-27														STAINLESS

Depth measurement includes handles.

AVAILABLE OPTIONS

SUFFIX	OPTION
27	2" Stainless steel top
R	Remote models available
Append suffix to model # when placing order. Ex: BB36HC-1-S-27	

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-FG-PT-B	4/4	115	1/3	3.1	13.6	48	27.38	34	320	2	288	300	325	BLACK
	BB48HC-1-FG-PT-S														STAINLESS
	BB48HC-1-FG-PT-B-27	4/4	115	1/3	3.1	13.6	48	27.38	36	302	2	288	300	325	BLACK
	BB48HC-1-FG-PT-S-27														STAINLESS
72"	BB72HC-1-F-G-PT-B	6/6	115	1/3	3.1	22.1	72	27.38	34	456	3	540	480	505	BLACK
	BB72HC-1-F-G-PT-S														STAINLESS
	BB72HC-1-F-G-PT-B-27	6/6	115	1/3	3.1	22.1	72	27.38	36	456	3	540	480	505	BLACK
	BB72HC-1-F-G-PT-S-27														STAINLESS

GLASS DOORS (SLIDING) (Door frame only comes in black)

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK BOTTLES	FINISH
48"	BB48HC-1-GS-F-PT-B	4/4	115	1/3	3.1	13.6	48	25.75	34	316	2	288	300	325	BLACK
	BB48HC-1-GS-F-PT-S														STAINLESS
	BB48HC-1-GS-F-PT-B-27	4/4	115	1/3	3.1	13.6	48	25.75	36	316	2	288	300	325	BLACK
	BB48HC-1-GS-F-PT-S-27														STAINLESS
72"	BB72HC-1-GS-F-PT-B	6/6	115	1/3	3.1	22.1	72	23.75	34	366	3	540	480	505	BLACK
	BB72HC-1-GS-F-PT-S														STAINLESS
	BB72HC-1-GS-F-PT-B-27	6/6	115	1/3	3.1	22.1	72	23.75	36	366	3	540	480	505	BLACK
	BB72HC-1-GS-F-PT-S-27														STAINLESS

Depth measurement includes handles.

BOTTLE COOLERS

Galvanized Steel Interior

Stainless Steel Floor

**Full electronic
temperature control**

100% Metal lids
toughest in the industry
to prevent bowing of lids

Stainless steel top

Easy-glide metal lids and raised edge

Bottle opener and cap catcher standard

Adjustable wire dividers



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**
MADE IN USA



ADJUSTABLE DIVIDERS
to organize cooler to meet your
specific needs



100% METAL LIDS
toughest in the industry to prevent
bowing of lids

ACCESS OPTIONS

- Metal lids

AGENCY CERTIFICATIONS



FROSTY BREW™ 30-32°

MAINTAINS PRODUCT TEMPERATURES OF 30-32°F.

MODEL WIDTH	MODEL #	LIDS/ DIVIDERS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FINISH
50"	DW49HC-B-29	2/3	115	1/4	2.5	13.7	50	26.5	33.75	272	BLACK
	DW49HC-S-29									274	STAINLESS FRONT
65"	DW64HC-B-29	2/4	115	1/4	2.5	18.5	65	26.5	33.75	322	BLACK
	DW64HC-S-29									332	STAINLESS FRONT
80"	DW79HC-B-29	3/5	115	1/4	2.5	24.1	80	26.5	33.75	390	BLACK
	DW79HC-S-29									432	STAINLESS FRONT
95"	DW94HC-B-29	4/6	115	1/4	2.5	28.63	95	26.5	33.75	450	BLACK
	DW94HC-S-29									456	STAINLESS FRONT

STANDARD 36-40°

MAINTAINS PRODUCT TEMPERATURES OF 36-40°F.

MODEL WIDTH	MODEL #	LIDS/ DIVIDERS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	FINISH
35"	SF34-B	1/0	115	1/5	4.5	7.5	34.88	26.5	33.63	210	BLACK
	SF34-SS									228	STAINLESS FRONT
50"	DW49HC-B	2/3	115	1/4	2.5	13.7	50	26.5	33.75	272	BLACK
	DW49HC-S									274	STAINLESS FRONT
65"	DW64HC-B	2/4	115	1/4	2.5	18.5	65	26.5	33.75	322	BLACK
	DW64HC-S									332	STAINLESS FRONT
80"	DW79HC-B	3/5	115	1/4	2.5	24.1	80	26.5	33.75	390	BLACK
	DW79HC-S									432	STAINLESS FRONT
95"	DW94HC-B	4/6	115	1/4	2.5	28.63	95	26.5	33.75	450	BLACK
	DW94HC-S									456	STAINLESS FRONT

Depth measurement includes handles.
Height measurement includes mounting height.

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Frosty brew model (30-32° F)
- Extra wide dividers
- Locks

MOUNTING OPTIONS

- 3" casters
- 6" legs

AVAILABLE OPTIONS

- Remote models available



GLASS & PLATE CHILLERS

Front or Top Loading

Interior thermometer

Self-closing door with 120° stay-open feature (Front Loading Models)

Field-reversible door (Front Loading Models)

Easy door removal for service and cleaning (Top Loading)

Magnetic gasket attached to each door for positive seal

Auto-defrost

Built-in Condensate Evaporator System

Operating Temperature -10F

Two Epoxy Coated Shelves

R290 Refrigerant



**3 YEAR PARTS & LABOR WARRANTY WITH
AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY**
MADE IN USA



ADJUSTABLE DIVIDERS
to organize cooler to meet your
specific needs



100% METAL LIDS
toughest in the industry to prevent
bowing of lids

ACCESS OPTIONS

- Doors
- Metal lids

AGENCY CERTIFICATIONS



FRONT LOADING

CHILLS TO -10°F, PRODUCING FROST WHEN REMOVED

MODEL WIDTH	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY		FINISH
											12oz MUGS	8" PLATES	
24"	FLG24HC-1-B	1/2	115	1/4	2.5	5.06	24	30.13	32	208	80	100	BLACK
	FLG24HC-1-S												STAINLESS

Depth measurement includes handles.

TOP LOADING

CHILLS TO -10°F, PRODUCING FROST WHEN REMOVED

MODEL WIDTH	MODEL #	LIDS/ DIVIDERS	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY		FINISH
											12oz MUGS	8" PLATES	
24"	GF24L-B	1/2	115	1/2	7	3.67	24	26.13	33.63	186	76	100	BLACK
	GF24L-S												STAINLESS
34"	GF34L-B	1/2	115	1/2	6.5	6.6	34	26.13	33.63	223	94	150	BLACK
	GF34L-S												STAINLESS
48"	GF48L-B	2/4	115	1/2	7.5	9.6	48	26.13	33.63	292	164	250	BLACK
	GF48L-S												STAINLESS

Depth measurement includes handles.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE ACCESSORIES

- Locks factory installed available for GF24L & GF34L

AVAILABLE OPTIONS

- Remote models available

MOUNTING OPTIONS

- 3" casters (GF models only)
- 6" legs (GF models only)

Bar & Wine Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	DD48	403-322D
Epoxy Coated Wire Shelf	DD50/50C Shelf Kit (set of 2)	00C21-022A
Epoxy Coated Wire Shelf	DD58 Shelf Kit (set of 2)	00C21-007A
Epoxy Coated Wire Shelf	DD68 Shelf Kit (set of 2)	00C21-006A
Epoxy Coated Wire Shelf	DD72	403-326D
Epoxy Coated Wire Shelf	DD78 Shelf Kit (set of 3)	00C21-023A
Epoxy Coated Wire Shelf	DD94 Center Shelf	403-216D
Epoxy Coated Wire Shelf	DD94 Right Shelf	403-249D
Epoxy Coated Wire Shelf	DD94 Left Shelf	403-690D-01
Epoxy Coated Wire Shelf	BB24	403-922D-02
Epoxy Coated Wire Shelf	BB36	403-924D-02
Epoxy Coated Wire Shelf	BB48/48G	403-322D
Epoxy Coated Wire Shelf	BB58/58G LH	403-218D
Epoxy Coated Wire Shelf	BB58/58G RH	403-249D
Epoxy Coated Wire Shelf	BB68/68G	403-217D
Epoxy Coated Wire Shelf	BB72/72G	403-326D
Epoxy Coated Wire Shelf	BB78/78G CTR	403-582D
Epoxy Coated Wire Shelf	BB78/78G LH	403-583D
Epoxy Coated Wire Shelf	BB78/78G RH	403-584D
Epoxy Coated Wire Shelf	BB94/94G CTR	403-216D
Epoxy Coated Wire Shelf	BB94/94G RH	403-249D
Epoxy Coated Wire Shelf	BB94/94G LH	403-690D-01
Epoxy Coated Wire Shelf	DP46/67/93/119, DPD46/67/93/119	403-834D
Shelf Clip	DD48/72/94	403-168A
Shelf Clip	All BB's	403-168A
All Epoxy Coated Shelves	BB24	403-942D-01
All Epoxy Coated Shelves	BB36	403-722C
All Epoxy Coated Shelves	BB48	403-722C
All Epoxy Coated Shelves	BB58/BB68	403-719C
All Epoxy Coated Shelves	BB72	403-722C
All Epoxy Coated Shelves	BB78	403-719C
All Epoxy Coated Shelves	BB94	403-719C

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
6" Caster	BB24/BB36	00C31-038A
6" Caster	BB48, BB72 (set of four)	00C31-038A
3" Caster	BB48, BB72 (set of four)	00C31-041A
3" Caster	BB58, BB68 (set of four)	00C26-012A
3" Caster	BB78, BB94 (set of six)	00C26-017A
3" Caster	DD36	00C31-041A
6" Caster	DD36	00C31-038A
6" Caster	DD48, DD72 (set of four)	00C31-038A
3" Caster	DD48, DD72 (set of four)	00C31-041A
3" Caster	DD50, DD58, DD68 (set of four)	00C26-012A
3" Caster	DD78, DD94 (set of six)	00C26-017A
3" Caster	DW49 (set of four)	00C31-034ABB
3" Caster	DW64 (set of four)	00C31-031ABB
3" Caster	DW79, DW94 (set of six)	00C31-030ABB
3" Plate Casters	SF34 (set of four)	00C28S092AAA
3" Caster	GF24, 34, 48 (set of four)	00C28S110A--
6" Adjustable with Plate	DW49 (set of four)	00C31-036A--
6" Adjustable with Plate	DW64 (set of four)	00C31-033ABB
6" Adjustable with Plate	DW79, 94 (set of six)	00C31-032ABB
6" Adjustable with Plate	SF34 (set of four)	00C31-035AAA
Leg Accessory Kit	BM23 (set of four)	00C06-002A--
6" Adjustable with Plate	GF24, 34, 48 (set of four)	00C31-035AAA
6" Black Leg	BB/DD 24, 36, 48, 72 (set of four)	58B02S001A
6" Adjustable with Plate	BB58, 68, DD50, 58, 68 (set of four)	00C26S014A
6" Adjustable with Plate	BB/DD 78, 94 (set of six)	00C26S015A
LID LOCKS		
Lid Lock	GF24/34	00C30-100A
Lid Lock	GF48	00C30-101A
Lid Lock	SF34	00C30-031ABB
Lid Lock	DW49 Solid Lid	00C30-030AAA
Lid Lock	DW64 Solid Lid	00C30-029AAA
Lid Lock	DW79 Solid Lid	00C30-028AAA
Lid Lock (2 required for DW94)	DW94 Solid Lid	00C30-030AAA

Bar & Wine Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
TAPS / FAUCETS / MANIFOLDS		
Hole cover for cut out on DD units	ALL DD UNITS	00C10-006A
1 Tap 3" OD Beer Faucet	ALL DD UNITS	406-053A
1 Tap 2 1/2" OD Beer Faucet	ALL DD UNITS	406-004A--
2 Tap 3" OD Beer Faucet	ALL DD UNITS	406-054A
3 Tap 3" OD Beer Faucet	ALL DD UNITS	406-055A
4 Tap 3" OD Beer Faucet	ALL DD UNITS	406-064A
5 Tap 3" OD Beer Faucet	ALL DD UNITS	406-075A
1 Tap 3" OD Wine Faucet	ALL DD UNITS	406-060A
1 Tap 2 1/2" OD Wine Faucet	ALL DD UNITS	406-065A
2 Tap 3" OD Wine Faucet	ALL DD UNITS	406-061A
3 Tap 3" OD Wine Faucet	ALL DD UNITS	406-062A
4 Tap 3" OD Wine Faucet	ALL DD UNITS	406-063A
Single Faucet Adapter	ALL DD UNITS	406-056A
Double Faucet Adapter	ALL DD UNITS	406-057A
2 Way Manifold	ALL DD UNITS	402-188A
3 Way Manifold	ALL DD UNITS	402-189A
4 Way Manifold	ALL DD UNITS	402-226A
Turbo Tap	ALL DD UNITS	406-072A
Turbo Tap Riser	ALL DD UNITS	406-074A
ADDITIONAL ACCESSORIES		
Wire Divider (Step)	DW UNITS	403-114D
Wire Divider (Adjustable)	DW UNITS	403-113D
Wire Divider Spring	DW UNITS	401-090AAB
Cap Catcher (black)	DW & SF UNITS	09B30S025C
Draft Arm Faucet Lock (slide on)	ALL DD UNITS	401-909A
Glass Rinser	ALL DD UNITS	406-067A



Super Bright RGB LED Liquor Shelves

- 50,000 hours minimum life
- Environmentally friendly:
no mercury, lead or toxic gases
- Color-rich, programmable LED's
- Available up to 8' Long
- 44 Key RGB Wireless Remote Control
to control unlimited colors with multiple lighting effects
- Independent level control:
choose colors for each step independent of the others
- Plugs into any standard wall outlet
- Modular Construction
- Includes UL listed power supply
- 100% Black Acrylic bottle tiers. Glossy black on front
and sides with frosted acrylic tops.

DESCRIPTION	PART NUMBER
2' LED Liquor Shelf, 24"L X 4.5"W X .75" Thick, 2 wall brackets	LS2-24L
3' LED Liquor Shelf, 36"L X 4.5"W X .75" Thick, 2 wall brackets	LS3-36L
4' LED Liquor Shelf, 48"L X 4.5"W X .75" Thick, 3 wall brackets	LS4-48L
5' LED Liquor Shelf, 60"L X 4.5"W X .75" Thick, 4 wall brackets	LS5-60L
6' LED Liquor Shelf, 72"L X 4.5"W X .75" Thick, 5 wall brackets	LS6-72L
2' Double Wide LED Liquor Shelf, 24"L X 9"W X .75 Thick, 2 wall brackets	LS2-24L-DW
3' Double Wide LED Liquor Shelf, 36"L X 9"W X .75 Thick, 2 wall brackets	LS3-36L-DW
4' Double Wide LED Liquor Shelf, 48"L X 9"W X .75 Thick, 3 wall brackets	LS4-48L-DW
5' Double Wide LED Liquor Shelf, 60"L X 9"W X .75 Thick, 4 wall brackets	LS5-60L-DW
6' Double Wide LED Liquor Shelf, 72"L X 9"W X .75 Thick, 5 wall brackets	LS6-72L-DW
2' Two Tier LED Bottle Display, 24"L X 9"D X 8"H	LBD2-24L
3' Two Tier LED Bottle Display, 36"L X 9"W X 8"H	LBD2-36L
4' Two Tier LED Bottle Display, 48"L X 9"W X 8"H	LBD2-48L
5' Two Tier LED Bottle Display, 60"L X 9"W X 8"H	LBD2-60L
6' Two Tier LED Bottle Display, 72"L X 9"W X 8"H	LBD2-72L
2' Three Tier LED Bottle Display, 24"L X 13.5"D X 12"H	LBD3-24L
3' Three Tier LED Bottle Display, 36"L X 13.5"D X 12"H	LBD3-36L
4' Three Tier LED Bottle Display, 48"L X 13.5"D X 12"H	LBD3-48L
5' Three Tier LED Bottle Display, 60"L X 13.5"D X 12"H	LBD3-60L
6' Three Tier LED Bottle Display, 72"L X 13.5"D X 12"H	LBD3-72L
2' Four Tier LED Bottle Display, 24"L X 18"W X 16"H	LBD4-24L
3' Four Tier LED Bottle Display, 36"L X 18"W X 16"H	LBD4-36L
4' Four Tier LED Bottle Display, 48"L X 18"W X 16"H	LBD4-48L
5' Four Tier LED Bottle Display, 60"L X 18"W X 16"H	LBD4-60L
6' Four Tier LED Bottle Display, 72"L X 18"W X 16"H	LBD4-72L







MILK COOLERS

MADE TO DELIVER CONSISTENT PERFORMANCE DURING REPEATED ACCESS

MILK COOLERS

CFC & HCFC-free insulation is foamed-in-place
for increased structural strength & energy efficiency

Epoxy coated, steel wire racks included
for added floor protection

Flexible compression door gaskets
ensure a tight seal for added temperature control

Cylinder Locks

Bottom drain for connection to drain hose and easy cleaning

External digital thermometer

Coolers hold milk between 36°-38°F
until ready to serve for maximum refreshment



ONE-PIECE BOTTOM FOR MAXIMUM SUPPORT

3 YEAR PARTS & LABOR WARRANTY WITH AN ADDITIONAL 2 YEAR COMPRESSOR WARRANTY

MADE IN USA



ONE-PIECE REINFORCED FLOOR
for maximum milk crate support and made with stainless steel



SINGLE AND DUAL ACCESS
models available

ACCESS OPTIONS

- Metal lids

AGENCY CERTIFICATIONS



COLD WALL - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
34"	SM34HC-S	115	1/3	2.2	12.73	34	30.63	41.13	271	8	4	STAINLESS	STAINLESS
	SM34HC-W								277	8	4	WHITE	WHITE
	SM34HC-W-02								237	8	4	WHITE	STAINLESS
49"	SM49HC-S	115	1/3	2.2	20.32	49	30.63	41.13	338	12	8	STAINLESS	STAINLESS
	SM49HC-W								339	12	8	WHITE	WHITE
	SM49HC-W-02								340	12	8	WHITE	STAINLESS
58"	SM58HC-S	115	1/3	2.2	22.63	58	30.63	41.13	384	16	10	STAINLESS	STAINLESS
	SM58N-W								376	16	10	WHITE	WHITE
	SM58N-W-02								376	16	10	WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

FORCED AIR - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
34"	SMF34HC-1-S	115	1/6	7.5	13.59	34	33.63	46.88	335	8	4	STAINLESS	STAINLESS
	SMF34HC-1-W								335	8	4	WHITE	WHITE
	SMF34HC-1-W-02								335	8	4	WHITE	STAINLESS
49"	SMF49HC-1-S	115	1/4	3	19.66	49	33.63	46.88	437	12	8	STAINLESS	STAINLESS
	SMF49HC-1-W								437	12	8	WHITE	WHITE
	SMF49HC-1-W-02								437	12	8	WHITE	STAINLESS
58"	SMF58HC-1-S	115	1/3	3.3	24	58	33.63	46.88	458	16	10	STAINLESS	STAINLESS
	SMF58HC-1-W								458	16	10	WHITE	WHITE
	SMF58HC-1-W-02								458	16	10	WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

EXTERIOR FINISHES

- White coated steel
- Stainless steel

INTERIOR FINISHES

- Galvanized steel
- Stainless Steel

AVAILABLE ACCESSORIES

- Cow Spot graphics
- Custom graphics available
- Corner & Wrap-around bumpers

MOUNTING OPTIONS

- 4" casters (SM models only)
- 7" casters (SMF models only)



MILK COOLERS

COLD WALL - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
34"	ST34HC-S	115	1/2	3.7	12.37	34	31.25	41.13	270	8	4	STAINLESS	STAINLESS
	ST34HC-W								270	8	4	WHITE	WHITE
	ST34HC-W-02								270	8	4	WHITE	STAINLESS
49"	ST49HC-S	115	1/2	3.7	18.97	49	31.25	41.13	336	12	8	STAINLESS	STAINLESS
	ST49HC-W								336	12	8	WHITE	WHITE
	ST49HC-W-02								336	12	8	WHITE	STAINLESS
58"	ST58HC-S	115	1/2	3.7	22.5	58	31.25	41.13	372	16	10	STAINLESS	STAINLESS
	ST58HC-W								372	16	10	WHITE	WHITE
	ST58HC-W-02								372	16	10	WHITE	STAINLESS

Depth measurement includes handles.
Height measurement includes mounting height.

FORCED AIR - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL WIDTH	MODEL #	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT	CASE CAPACITY 13 X 13 X 11"	CASE CAPACITY 19 X 13 X 11"	EXTERIOR FINISH	INTERIOR FINISH
49"	STF49HC-1-S	115	1/3	3.3	20.55	49	34	47.75	400	12	8	STAINLESS	STAINLESS
	STF49HC-1-W								417	12	8	WHITE	WHITE
	STF49HC-1-W-02								417	12	8	WHITE	STAINLESS
58"	STF58HC-1-S	115	1/3	3.3	24.3	58	34	47.75	498	16	10	STAINLESS	STAINLESS
	STF58HC-1-W								498	16	10	WHITE	WHITE
	STF58HC-1-W-02								498	16	10	WHITE	STAINLESS

Depth measurement includes handles.
Height measurement includes mounting height.

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
4" Plate Caster (standard)	SM/ST 34,49,58 (per caster-2 required per cabinet)	401-094A
4" Plate Caster w/brake (standard)	SM/ST 34,49,58 (per caster-2 required per cabinet)	401-099A
7" Plate Caster (standard)	SMF34,SMF49,SMF58 (per caster-2 required per cabinet)	401-519A
7" Plate Caster w/brake (standard)	SMF34,SMF49,SMF58 (per caster-2 required per cabinet)	401-520A
5" Plate Caster w/brake (standard)	STF49/STF58 (per caster-2 required per cabinet)	401-127A
5" Plate Caster (standard)	STF49/STF58 (per caster-2 required per cabinet)	401-209A
6" Adjustable with Plate	SM34,49,58 ST34,49,58 (set of four)	00C06-003A

BUMPERS <i>(Require field tapping and installation)</i>		
Wrap Around Bumpers	SM/ST34	00C01-004A
Wrap Around Bumpers	SM/ST49	00C01-005A
Wrap Around Bumpers	SM/ST58	00C01-006A
Wrap Around Bumpers	SMF34	00C01-009A
Wrap Around Bumpers	SMF49	00C01-010A
Wrap Around Bumpers	SMF58	00C01-011A
Corner Bumpers (single)	All Milk Coolers	703-868A
Corner Bumpers (Set of 4)	Corner Bumper Kit (set of 4)	00C01-012A-01

DECALS		
Base Kit (Cow Spots)	SM34, ST34, SMF34	807-836C
1 Base Kit (Cow Spots)	SM49, ST49, SMF49	807-836C
Supplemental Kit (Cow Spots)	SM49, ST49, SMF49	807-837C
1 Base Kit (Cow Spots)	SM58, ST58, SMF58	807-836C
Supplemental Kit (Cow Spots)	SM58, ST58, SMF58 (2 kits required)	807-837C
Got Milk® Lid Decal	SMF/SM/ST34	807-839C-001
Got Milk Lid Decal	SMF/SM/ST49	807-839C-002
Got Milk Lid Decal	SMF/SM/ST58	807-839C-003
Got Milk Lid Decal	STF49	807-839C-004
Got Milk Lid Decal	STF58	807-839C-005
Got Milk Door Decal	SMF/SM/ST34	807-839C-006
Got Milk Door Decal	SMF/SM/ST49	807-839C-007
Got Milk Door Decal	SMF/SM/ST58	807-839C-008

WARRANTY

SALES TERMS (Warranty valid in USA and Canada)

PRICES & SPECIFICATIONS

Beverage-Air reserves the right to change the price and specifications of the equipment and/or material without notice. Prices are F.O.B. plant of manufacture.

CANCELLATION

Buyer may cancel its order, reduce quantities, revise specifications, or extend schedules only by mutual agreement as to reasonable and proper cancellation charges which shall take into account expenses already incurred and commitment made by seller, and buyer shall indemnify seller against any loss.

FREIGHT CLASS

All Beverage-Air products ship under 150 freight classification.

CUSTOMER'S FREIGHT DAMAGE PROCEDURE

Before signing the carrier's freight bill the customer should do the following:

Visible Damage:

1. Inspect shipment for any damage. If you see damage or feel there may be concealed damage, mark the carrier's copy of the freight bill "damaged".
2. If there is damage to your shipment, action must be taken by you to notify Beverage Air immediately. A freight claim must be filed with the carrier and an inspection scheduled by the carrier. It is the duty of the carrier to give you a written report upon notification. (VISIBLE AND CONCEALED).
3. For visible damage, where possible, do not accept delivery unless the condition noted on your copy of the freight bill and signed by the driver.

Concealed Damage:

4. If the damage is concealed, notify the carrier within 5 days of the receipt of the product by phone and in writing as well as Beverage Air. Ask them to send their agent to complete an inspection report. Retain all cartons and merchandise for inspection. It is critical that the customer take the above actions; without these steps claims for concealed damages may be denied.

3RD PARTY FREIGHT

3rd Party Freight shipments are FOB factory and are not eligible for refusal at time of delivery.

ALL 3RD PARTY SHIPMENTS ARE THE RESPONSIBILITY OF THE SHIPPER. Claims for damaged product are to be filed by the shipper and Beverage Air will not be liable. This product is not eligible for return to our warehouse facility.

RETURN OF PRODUCT

EQUIPMENT - Prior Authorization must be granted by Beverage-Air before equipment can be returned for credit. Returns will only be authorized within 90 days of invoice date. Return authorizations are valid for 30 days. Equipment approved for return is subject to a 25% restocking charge.

Returned equipment must be shipped freight prepaid, packed in original carton, and received in good condition.

PARTS - Prior Authorization must be granted by Beverage-Air before parts can be returned for credit. Returns will only be authorized within 30 days of invoice date. Return authorizations are valid for 30 days. Parts approved for return are subject to a 25% restocking charge. Returned parts must be shipped freight prepaid, in the original packaging, and received in good condition.

LIMITATION OF LIABILITY:

Beverage-Air Corporation or their affiliates shall not be liable for any indirect, incidental, special or consequential damages, or losses of a commercial nature arising out of malfunction equipment or its parts components thereof, as a result of defects in material or workmanship.

THE ORIGINAL OWNER'S SOLE AND EXCLUSIVE REMEDY AND BEVERAGE-AIR'S SOLE AND EXCLUSIVE LIABILITY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF PARTS OR COMPONENTS CONTAINED IN THE EQUIPMENT IDENTIFIED ABOVE WHICH UNDER NORMAL USE AND SERVICE MALFUNCTION AS A RESULT OF DEFECTS IN MATERIAL OR WORKMANSHIP, SUBJECT TO THE APPLICABLE PROVISIONS AND LIMITATIONS STATED ABOVE.

Note: Additional Terms and Conditions of sale may apply. Notice: Specifications Subject to Change Without Notice. Contact factory for specific model agency approval. All prices are ex-works Brookville, Pennsylvania.

THREE (3) YEAR PARTS AND LABOR WARRANTY (CF/CT MODELS CARRY ONE (1) YEAR PARTS AND LABOR WARRANTY LIMITED TO FIFTEEN (15) MONTHS FROM DATE OF SHIPMENT)

Beverage-Air Corporation warrants to the original purchaser of Beverage-Air branded equipment, including all parts thereof, that such equipment is free from defects in material and workmanship, under normal use, proper maintenance, and service as indicated by Beverage-Air installation and operation instructions, for a period of three (3) years from the date of installation, or thirty-nine (39) months from the date of shipment from the manufacturer, whichever is earlier.

Normal wear type parts, such as light bulbs/lamps and gaskets are not covered by this warranty. For the purpose of this warranty, the original purchaser shall be deemed to mean the individual or company for who the product was originally installed.

Our obligation under this warranty shall be limited to repairing or replacing, including labor, any part of such product, which proves thus defective. Beverage-Air reserves the right to examine any product claimed to be defective.

The labor warranty shall be for self-contained units only and for standard straight time, which is defined as normal service rate time, for service performed during normal working hours. Any service requested outside of a servicer's normal working hours will be covered under this warranty at the normal rate and any additional overtime rate will be at the responsibility of the equipment purchaser.

Any part determined to be defective in the product should be returned to the company within thirty (30) days under the terms of this warranty and must be accompanied by a record of the cabinet model, serial number, and identified with a return material authorization number (RMA#) issued by the manufacturer.

Special installation/applications, including remote locations, are limited in coverage by this warranty. Any installation that requires extra work, and/or travel, to gain access to the unit for service is the sole responsibility of the equipment purchaser.

Improper operation resulting from factors, including but not limited to: *improper or negligent cleaning and maintenance, low voltage conditions, inadequate wiring, outdoor use (unless otherwise specified) and accidental damage*, are not manufacturing defects and are strictly the responsibility of the purchaser.

With the exception of Blast Chillers product is designed for maintaining temperature and not bringing food to a desired temperature therefore cannot be held responsible for this function under warranty.

Condensing coils must be cleaned at regular intervals. Failure to do so can cause compressor malfunction and will void warranty. Although cleaning requirements vary in accordance with operation of various products, Beverage-Air recommends a minimum monthly cleaning.

ADDITIONAL TWO (2) YEAR COMPRESSOR PART WARRANTY

In addition to the warranty set forth above, Beverage-Air warrants the hermetically/semi-hermetically sealed compressor (part only) for an additional two (2) years beyond the first three (3) years warranty period; not to exceed sixty-three (63) months from the date of shipment from Beverage-Air, provided upon receipt of the

compressor, manufacturer examination shows the sealed compressor to be defective. This extended warranty does not cover freight for the replacement compressor or freight for the return of the failed compressor. Also, this extended compressor-part only warranty does NOT apply to any electrical controls, condenser, evaporator, fan motors, overload switch, starting relay, capacitors, temperature control, filter/drier, accumulator, refrigeration tubing, wiring harness, labor charges, or supplies which are covered by the standard warranty above.

NO CLAIMS CAN BE MADE AGAINST THIS WARRANTY FOR SPOILAGE OF PRODUCTS, LOSS OF SALES OR CONSEQUENTIAL DAMAGES

THE FOREGOING WARRANTIES ARE EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HERBY DISCLAIMED, ALL OTHER OBLIGATIONS OR LIABILITIES ON OUR PART, AND WE NEITHER ASSUME, NOR AUTHORIZE ANY OTHER PERSON TO ASSUME FOR US, ANY OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF SAID REFRIGERATION UNITS OR ANY PARTS THERE OF.

This warranty shall not be assignable and shall be honored only in so far as the original purchaser. This warranty does not apply outside the limits of the United States of America and Canada, nor does it apply to any part that has been subject to misuse, neglect alteration, accident, or to any damage caused by transportation, flood, fire, acts of terrorism, or acts of God.

Residential applications: Units installed in residential applications will be warranted for a period of 1 year parts & labor from the date of original shipment.

CONTACTS

1 Professional Reps
ph: (877) 995-8922
fax: (602) 864-1754
email: brian@professionalreps.com
territory: Ohio, Kentucky, Western quarter of Pennsylvania, West Virginia

2 CR Peterson
ph: (800) 257-4040
fax: (508) 238-3647
email: jim@crpeterson.com
territory: Maine, New Hampshire, Vermont, Connecticut, Rhode Island, Massachusetts

3 Charles Pace & Associates, Inc.
ph: (770) 969-0488
fax: (770) 969-7277
email: ronnie@rycgroup.com
territory: Georgia, Alabama, Tennessee (Central and Eastern), Florida (panhandle)

4 The Schmid-Wilson Group
ph: (410) 998-9191
fax: (410) 998-9195
email: swg@theswg.com
territory: Maryland, District of Columbia, Virginia

5 TD Marketing
ph: (201) 935-1600
fax: (201) 935-1260
email: fdoyle@tdmarketingco.com
territory: New Jersey (Northern half of NJ), New York (Metro)

6 Ettinger Rosini/Waypoint
ph: (214) 343-2548
fax: (214) 343-2727
email: julie@ettros.com
territory: Oklahoma, Texas (except El Paso County)

7 Professional Reps
ph: (877) 995-8922
fax: (602) 864-1754
email: brian@professionalreps.com
territory: Arizona, Colorado, New Mexico, Utah, Wyoming, Texas (El Paso County only)

8 4 Star Reps
ph: (267) 522-8991
email: khiggins@4starreps.com
territory: Delaware (entire state), Pennsylvania (east of and including Bradford, Lycoming, Milton, Union, Mifflin, Juniata, Perry, Cumberland, & Adam Counties) New Jersey (south of and including Mercer, Burlington, and Ocean counties)

9 Swanson-Girard
ph: (704) 521-8811
fax: (704) 521-8801
email: sgirard@swanson-girard.com
territory: North Carolina, South Carolina

10 Lund-Iorio
ph: (949) 443-4855
fax: (949) 443-4856
email: scott@lund-iorio.com
territory: Nevada (Clark County), California (CA/Mexico border and southern third of state)

11 Kelly-Mincks
ph: (425) 481-9036
fax: (425) 806-5283
email: bill@kelly-mincks.com
territory: Washington, Oregon, Alaska, Montana, Idaho, Hawaii

12 The YES Group
ph: (651) 452-9889
fax: (651) 452-3804
email: justin@TheYesGroup.com
territory: Minnesota, North Dakota, South Dakota, Wisconsin

13 Walter Zebrowski Associates
ph: (415) 883-3222
fax: (415) 883-9332
email: tom@walterzebrowskiassoc.com
territory: Nevada (entire state except Clark County), California (Northern two thirds of state)

14 Professional Reps
ph: (877) 995-8922
fax: (602) 864-1754
email: brian@professionalreps.com
territory: Utah, Wyoming, Colorado

15 Tepper & Associates, Inc.
ph: (727) 322-1212
fax: (727) 322-1313
email: info@tepperreps.com
territory: Florida (except the panhandle)

16 J Wilson Marketing
ph: (518) 692-8083
fax: (518) 692-8084
email: joe@jwilsonmarketing.com
territory: New York (except Metro/ NYC)

17 Central Marketing Associates, Inc.
ph: (913) 897-2390
fax: (913) 897-2391
email: steve@cmafoodservice.com
territory: Missouri, Kansas, Iowa, Nebraska, Illinois (Southern two thirds of state)

18 Cassidy's Pro Line
ph: (630) 627-7353
fax: (630) 628-3529
email: prolinerep@aol.com
territory: Illinois (Northern third of state)

19 ECHO Foodservice Marketing Agents
ph: (504) 458-7012
fax: (504) 617-6607
email: bruce@echofoodservicemktg.com
territory: Mississippi, Western Tennessee, Arkansas, Louisiana

20 Phoenix Marketing
ph: 1(866) 377-8417
fax: (317) 534-3994
email: kford@phoenix-reps.com
territory: Indiana, Michigan

21 Castle Agencies
ph: (604) 904-7681
fax: (604) 904-7682
email: king@castleagencies.ca
territory: British Columbia, Yukon

22 The Solutions Group, Inc.
ph: (905) 760-1777
email: cmuzylo@solutionfsg.com
territory: Ontario (except Lakehead region), Quebec & Maritimes

23 The Solutions Group, Inc.
ph: (905) 760-1777
email: cmuzylo@solutionfsg.com
territory: Ontario (except Lakehead region), Quebec & Maritimes

24 Fred Peters Agencies Ltd.
ph: (403) 266-4360
email: bpatfpa@shaw.ca
territory: Alberta, Northwest Territories

25 Simpson-Wilson Ltd.
ph: (800) 342-3626
fax: (204) 633-9254
email: cam@simpsonwilson.com
territory: Manitoba, Saskatchewan, Ontario (Lakehead region only)

26 Professional Reps
ph: (877) 995-8922
fax: (602) 864-1754
email: brian@professionalreps.com
territory: New Mexico, El Paso County Texas

Factory Headquarters Sales Office

3779 Champion Blvd
Winston-Salem, NC 27105
Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

Food Service Manufacturing Facility

Parts RG's:
1082 Route 28
Brookville, PA 15825


Equipment RG's:
1082 Route 28
Brookville, PA 15825

24/7 Warranty Service
(877) 866-1223

Factory Technical Service
Phone: (800) 684-1199
Fax: (800) 262-9381

Factory Customer Service
Phone: (888) 845-9800
Fax: (800) 253-5168

For warranty service you may call
your dealer, local service company,
or our 24-hour Warranty Service
Dispatch (877) 866-1223

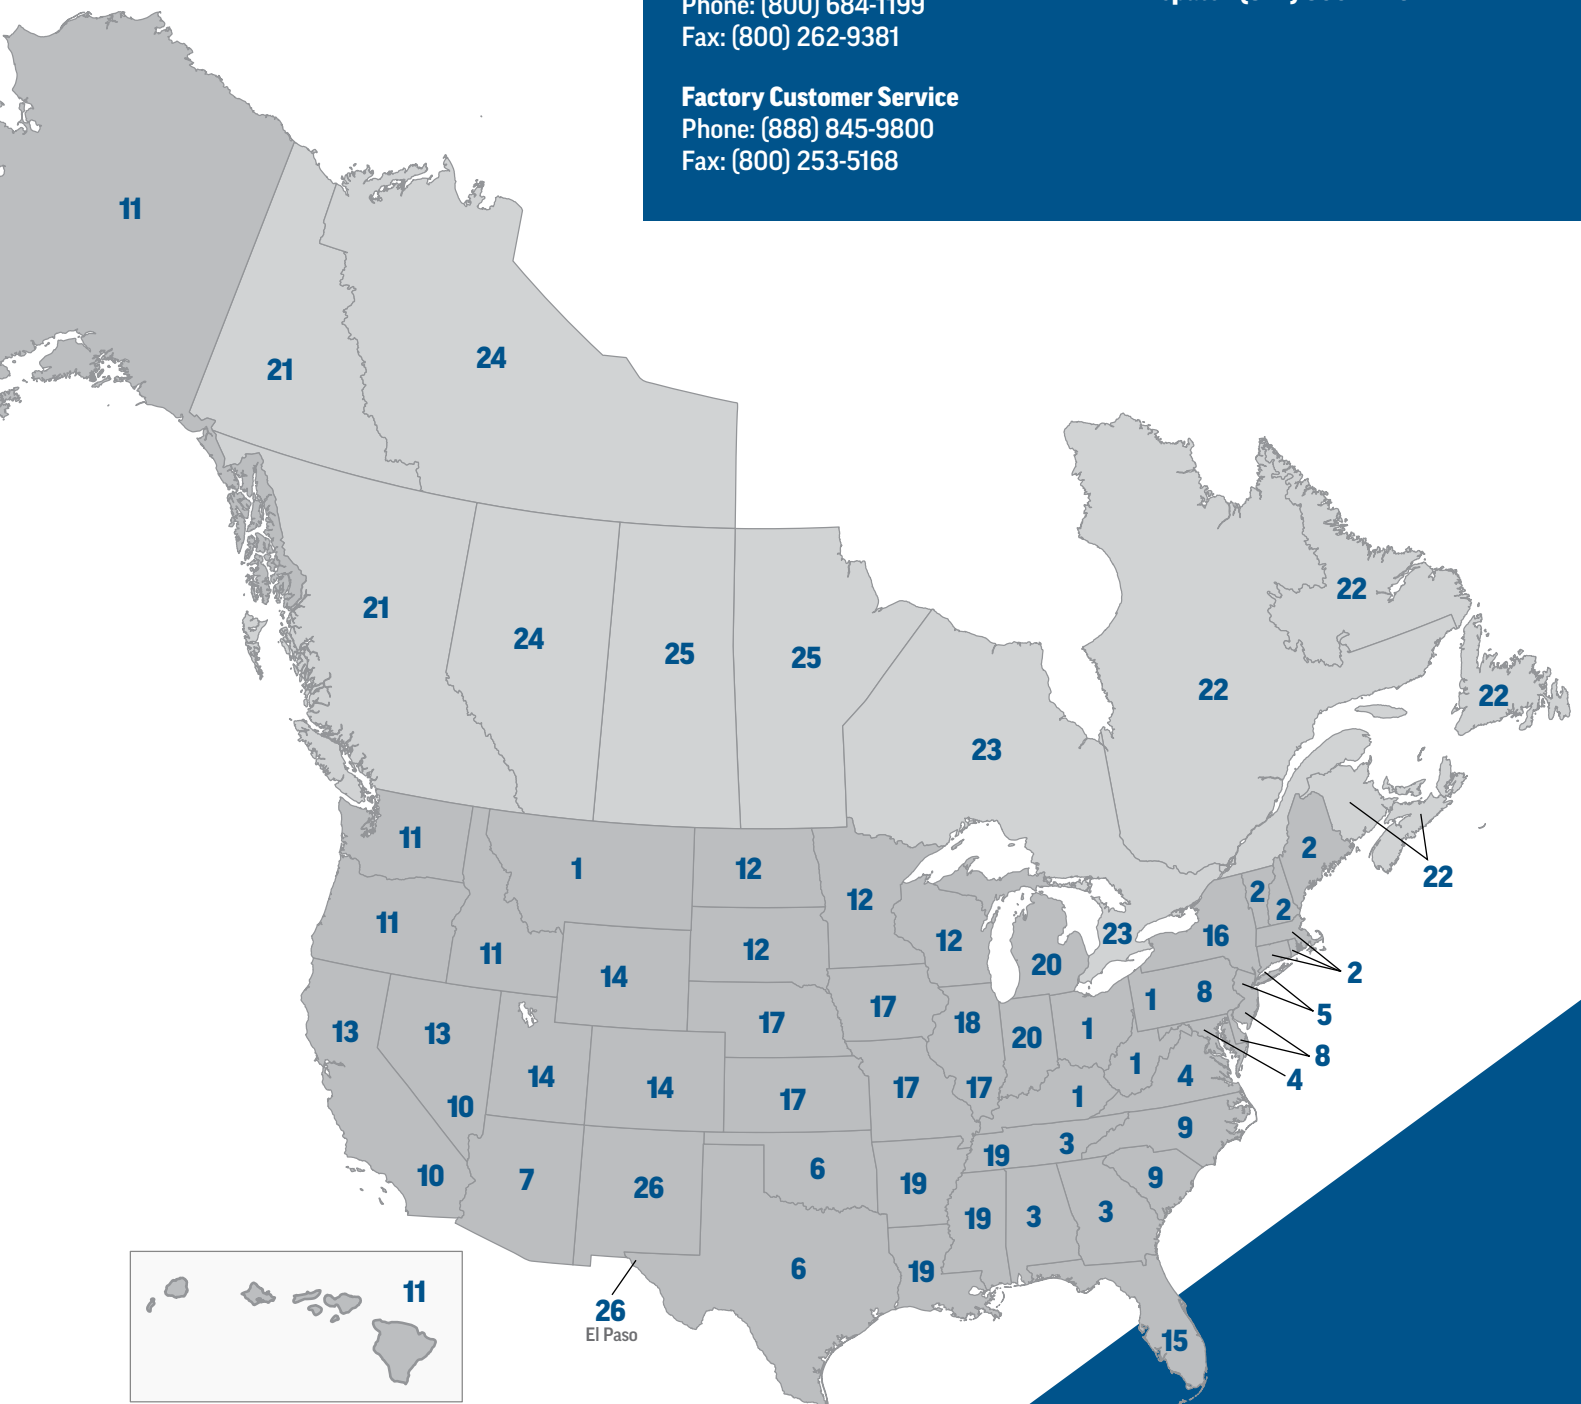



YOUR **COMPLETE** REFRIGERATION SOURCE



888-845-9800
beverage-air.com

3779 CHAMPION BLVD.
WINSTON-SALEM, NC 27105

PHONE: (888) 845-9800
FAX: (800) 253-5168

EMAIL: SALES@BEVAIR.COM

@beverageair



MASTER20190305

an Ali Group Company



The Spirit of Excellence