



Toaster Solutions

*Cafeterias • Buffets • Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars • Catering*



ITQ-1750-2C pg. 2



TPT-120 pg. 3



TQ-10 pg. 4



TQ-400 pg. 4



TRH-60 pg. 6



TK-100 pg. 6



Intelligent Toast-Qwik® Conveyor Toasters

Hatco's New Intelligent Toast-Qwik® allows the operator to toast multiple products at the touch of the button, changing easily from bagels to croissants to Texas toast to hash browns, as well as melting cheese and finishing smaller food products. The unit can easily take the place of the current toasting platform and add versatility and future menu expansion along with energy efficiency and cost savings.

- The conveyor toaster can operate in four different modes:
 - ~ Continuous Through Put
 - ~ Select Single Item Mode
 - ~ In and Reverses out Mode
 - ~ In, Pause, then Continues Through
- USB port located on the front allows for easy transfer of information such as program changes and product usage information
- The ability to program up to eighteen product settings
- Hatco's patented ColorGuard sensing system monitors and adjusts conveyor speed and temperature during high usage periods to ensure toast color uniformity
- Using Hatco's Spot-On® technology, the toaster senses when product is placed on the conveyor and activates the unit
- Easy to clean, with removable crumb tray and collector ramp. There is minimal operator maintenance required, with self cleaning elements and no maintenance motor and conveyor drives



ITQ-1000-1C



ITQ-1750-2C

HORIZONTAL CONVEYOR TOASTERS

Model	Voltage	Dimensions W x D x H	Watts	Amps	Capacity/ minute†	Plug	Ship Weight
ITQ-1000-1C®	208-240	17 ⁷ / ₈ " x 28 ³ / ₈ " x 18"	3230-4300	15.5-17.9	17	NEMA 6-30P	89 lbs.
ITQ-1750-2C	208	20" x 28 ¹ / ₁₆ " x 16 ⁵ / ₈ "	4960	23.8	30	NEMA 6-30P	106 lbs.
ITQ-1750-2C	240	20" x 28 ¹ / ₁₆ " x 16 ⁵ / ₈ "	4960	20.7	30	NEMA 6-30P	106 lbs.

† Toasting capacity may vary by product. Toasting of coated products not recommended.

® Unit is designed to operate on supply voltages between 208V and 240V.

All Intelligent Conveyor Toasters Feature:

Opening Dimensions: ITQ-1000-1C: 9⁵/₈"W x 2"H.

ITQ-1750-2C: Two openings at 5³/₈"W x 2¹/₄"H.

Cord Location: 6' Cord – left center on back of unit.

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL TOAST-QWIK METAL SHEATHED HEATING ELEMENTS.

OPTIONS (available at time of purchase only)

ITQ-L6 NEMA L6-30P Locking Cap in lieu of NEMA 6-30P



ITQ2C-PAD

ACCESSORIES (available for purchase at any time)

Paddle, with high temp, non-stick coating

ITQ1C-PAD 9" Wide Food Paddle (ITQ-1000-1C Model)

ITQ2C-PAD 5" Wide Food Paddle (ITQ-1750-2C Model)

ITQ - XXXX - XC

Intelligent Toast-Qwik

Model number

1C = single conveyor
2C = dual conveyor

POP-UP Toasters

Perfect for self-serve areas and light volume applications, the Hatco Pop-Up Toasters provide even golden toasting of a variety of bread products. The durable stainless steel housing contains four self-centering slots with individual toasting controls and removable crumb tray.

- Evenly toasts a variety of bread products including bagels, Texas toast, waffles and English muffins
- All models have four self-centering 1 1/4" wide slots
- A selector switch for single (or double) sided toasting (excluding TPT-120)
- Durable stainless steel construction
- Individual toasting controls
- Removable crumb trays for easy cleaning
- 6' cord with plug



TPT-120

Selector switch for single (or double) sided toasting (excluding TPT-120)



TPT-208

POP-UP TOASTERS

Model	Dimensions W x D x H	Voltage	kW	Plug	Ship Weight
TPT-120*	13 5/8" x 12 3/8" x 8 1/8"	120	1.8	NEMA 5-15P	15 lbs.
TPT-208*	13 3/8" x 12 3/8" x 8 1/8"	208	2.6	NEMA 6-15P	15 lbs.
TPT-240	13 3/8" x 12 3/8" x 8 1/8"	240	2.6	NEMA 6-15P	15 lbs.

- * Canadian Model is 1.4 kW.
- Canadian Model uses NEMA 6-20P.

All Pop-Up Toasters Feature:

Slot Opening: 1 1/4" W x 5 1/2" D.

Cord Location: 6' Cord – bottom, back center.

Pop-Up Toasters can be shipped Fed-Ex Ground or United Parcel Service.

ONE YEAR REPLACEMENT WARRANTY,
CONTACT HATCO SERVICE TEAM FOR DETAILS.

TOASTER AMP RATINGS

Model	120V/1 Ø Amps	208V/1 Ø Amps	240V/1 Ø Amps
TPT-120	15.0	–	–
TPT-120*	12.0	–	–
TPT-208	–	12.5	–
TPT-240	–	–	10.9

* Canada only

TPT - XXX

Toaster Pop-Up Type _____ Voltage



**Toast-Qwik®
Conveyor Toasters**

Flexibility and performance are yours with the Hatco Toast-Qwik® Conveyor Toasters. These toasters produce perfect golden toasting, from 300 to 1800 slices per hour. The power save mode conserves energy during non-peak serving times.

- Instant and precise adjustment of toast color with electronic infinite controls that regulate top and bottom heat
- Patented ColorGuard sensing system assures toast uniformity, for TQ-400, -800 and -1800 series
- Power save mode conserves energy
- Capacity of 300-1800 slices per hour
- Opening height for H and HBA models is 3", for all other models the opening height is 2"
- Insulation and an interior fan provide cool surface temperatures
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient – for sending product to the operator side or to the customer/server side
- TQ-1800 Series are 3-slice wide
- **BA models toast one side only and are for bagels and buns, cut side up**



TQ-10



TQ-800HBA

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions W x D x H (height includes legs)	Voltage/60Hz	kW	Plug	Capacity/ Minute†	Ship Weight
TQ-10	14½" x 17¾" x 13¾"	120	1.8	NEMA 5-15P	5 slices	42 lbs.
TQ-10	14½" x 17¾" x 13¾"	208, 240	1.8	NEMA 6-15P	5 slices	42 lbs.

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions W x D x H*	Voltage/60Hz	kW	Plug	Capacity/ Minute†	Ship Weight
TQ-400 [▲]	14½" x 17¾" x 14⅞"	120	1.8	NEMA 5-15P	6 slices	46 lbs.
TQ-400	14½" x 17¾" x 14⅞"	208, 240	2.2	NEMA 6-15P	6 slices	46 lbs.
TQ-400BA ^{▲▼}	14½" x 17¾" x 14⅞"	120	1.8	NEMA 5-15P	6 slices	46 lbs.
TQ-400BA [▼]	14½" x 17¾" x 14⅞"	208, 240	1.9	NEMA 6-15P	6 slices	46 lbs.
TQ-400H	14½" x 17¾" x 15⅞"	208, 240	2.2	NEMA 6-15P	6 slices	46 lbs.
TQ-800	14½" x 22¾" x 16⅞"	208	3.3	NEMA 6-20P	14 slices	62 lbs.
TQ-800*	14½" x 22¾" x 16⅞"	240	3.3	NEMA 6-15P	14 slices	62 lbs.
TQ-800BA [▼]	14½" x 22¾" x 16⅞"	208	3.3	NEMA 6-20P	14 slices	62 lbs.
TQ-800BA ^{▲▼}	14½" x 22¾" x 16⅞"	240	3.3	NEMA 6-15P	14 slices	62 lbs.
TQ-800H	14½" x 22¾" x 16⅞"	208	3.3	NEMA 6-20P	13 slices	62 lbs.
TQ-800H*	14½" x 22¾" x 16⅞"	240	3.3	NEMA 6-15P	13 slices	62 lbs.
TQ-800HBA [▼]	14½" x 22¾" x 16⅞"	208	3.3	NEMA 6-20P	13 slices	62 lbs.
TQ-800HBA ^{▲▼}	14½" x 22¾" x 16⅞"	240	3.3	NEMA 6-15P	13 slices	62 lbs.
Toasts three slices wide						
TQ-1800	18½" x 22¾" x 16⅞"	208, 240	4.4	NEMA 6-30P	30 slices	73 lbs.
TQ-1800BA [▼]	18½" x 22¾" x 16⅞"	208, 240	4.6	NEMA 6-30P	30 slices	73 lbs.
TQ-1800H	18½" x 22¾" x 16⅞"	208, 240	4.6	NEMA 6-30P	20 slices	73 lbs.
TQ-1800HBA [▼]	18½" x 22¾" x 16⅞"	208, 240	4.6	NEMA 6-30P	20 slices	73 lbs.


† Toasting capacity may vary by product. Toasting of coated products not recommended.
 * TQ-400 and TQ-400BA, add 2½" to depth if using tray extension in rear. TQ-800, TQ-800BA, TQ-800H, TQ-800HBA, TQ-1800, TQ-1800BA, TQ-1800H, and TQ-1800HBA add 6½" to depth if using tray extension in rear. Height includes legs.
 ▲ Canadian Model uses NEMA 5-20P.
 ▼ BA Models toast one side only and are for bagels and buns, cut side up.
 * Canadian Model uses NEMA 6-20P.

All Horizontal Conveyor Toasters Feature:

Cord Location: 6' Cord – lower right corner on back of unit.

Toast-Qwik Toasters can be shipped Fed-Ex Ground or United Parcel Service.

OPTIONS AND ACCESSORIES – PAGE 5

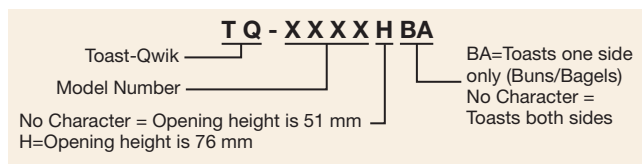

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL TOAST-QWIK METAL SHEATHED HEATING ELEMENTS.



TQ-1800 Toast Qwik® Horizontal Conveyor Toaster

OPTIONS (available at time of purchase only, excludes TQ-10)

TQ-PWR-A Automatic Power Save Mode
(Switches to Power Save Mode after 30 minutes of inactivity)

ACCESSORIES (available for purchase at any time)

Receptacles

20A-RECEP-125	20 Amp, 125V (NEMA 5-20R)
20A-RECEP-250	20 Amp, 250V (NEMA 6-20R)
30A-RECEP-250	30 Amp, 250V (NEMA 6-30R)
TQRAMP	Additional Extended Feed Guide (add 3") (not available on TQ-1800 Series)
TQ2-SECURITY	Control Cover and Bracket



TQ-800 with
TQ2-SECURITY
accessory security
control cover



20A-RECEP-125



20A-RECEP-250



30A-RECEP-250

CONVEYOR TOASTER AMP RATINGS

Model	120V/1 Ø Amps	208V/1 Ø Amps	240V/1 Ø Amps
TQ-10	15.0	8.8	7.6
TQ-400	14.9	10.7	9.3
TQ-400BA	14.8	9.0	7.8
TQ-400H		10.7	9.3
TQ-800		16.0	13.9
TQ-800BA		15.8	13.7
TQ-800H		16.0	13.9
TQ-800HBA		15.8	13.7
TQ-1800		21.4	18.5
TQ-1800H		22.4	19.4
TQ-1800BA		22.0	19.1
TQ-1800HBA		22.0	19.1

**CONVEYOR TOASTER OPENING
DIMENSIONS**

Model	Dimensions W x H
TQ-10, -400, -400BA, -800, -800BA	10" x 2"
TQ-400H, -800H, -800HBA	10" x 3"
TQ-1800, -1800BA	14" x 2"
TQ-1800H, -1800HBA	14" x 3"



**Toast-Rite®
and Toast King®
Conveyor Toasters**

Designed for mid to high volume and constant flow applications, Hatco's proven reliability and performance makes the TRH and TK Toasters the workhorse of your operation. These toasters use conveyor speed, not temperature, to determine toast color.

- Toasts a variety of bread products
- Stainless steel construction for years of trouble-free service
- Power saving thermostat for energy savings during non-peak times
- Manual advance, speed control and cord with plug included

- Fully insulated for cooler operation
- Multiple metal sheathed toasting elements
- Toast storage area keeps bread warm and dry
- Capacity of 480-600 slices per hour (TRH series)
- Capacity of 720-1500 slices per hour (TK series)
- Three basket access for fast loading (TK series)
- Top venting keeps heat away from the operator (TK series)



TRH-60



TK-72



TK-135B

CONVEYOR TOASTERS

Model	Dimensions W x D x H*	Voltage	Capacity/Minute†	Plug	Ship Weight
TRH-50	17 ⁵ / ₈ " x 27 ¹ / ₂ " x 16 ¹ / ₂ "	120	8 slices	NEMA 5-30P	60 lbs.
TRH-50	17 ⁵ / ₈ " x 27 ¹ / ₂ " x 16 ¹ / ₂ "	208, 240	8 slices	NEMA 6-20P	60 lbs.
TRH-60*	17 ⁵ / ₈ " x 27 ¹ / ₂ " x 16 ¹ / ₂ "	208, 240	10 slices	NEMA 6-20P	60 lbs.

* Depth includes tray extension of 5".

† Toasting capacity may vary by product. Toasting of coated products not recommended.

* 208V Canadian Model uses NEMA 6-30P.


All Toast-Rite Toasters Feature:

Basket Size: 10"W x 4⁵/₈"H.

Max. Product Thickness: 1¹/₄".

Cord Location: 4' Cord – lower right of center on back of unit.

Toast-Rite Toasters can be shipped Fed-Ex Ground or United Parcel Service.



VERTICAL CONVEYOR TOASTERS

Model	Description	Dimensions W x D x H*	Voltage	Capacity/Minute†	Plug	Ship Weight
TK-72*	Bread and Buns	17 ¹ / ₂ " x 17 ⁵ / ₈ " x 33"	208, 240	12 slices	NEMA 6-20	73 lbs.
TK-100	Bread and Buns	22" x 17 ⁵ / ₈ " x 33"	208, 240	16 slices	NEMA 6-30	88 lbs.
TK-135B*	Buns Only	22" x 17 ⁵ / ₈ " x 33"	208, 240	22 slices	NEMA 6-30	88 lbs.
TK-155B	3-Part Buns	22" x 17 ⁵ / ₈ " x 33"	208, 240	25 slices	NEMA 6-30	88 lbs.

* Depth includes tray extension of 3¹/₂".

† Toasting capacity may vary by product. Toasting of coated products not recommended.

* Canadian Model uses NEMA 6-30P.

* 240V Model use NEMA 6-20P (Canadian Model uses NEMA 6-30).

All Toast King Toasters Feature:

Voltage: 60 Hz, single phase only.


Basket Size: TK-72 (Two-slice Model): 10"W x 4⁵/₈"H.

TK-100, -135B, -155B (Three-slice Models): 14¹/₂"W x 4⁵/₈"H.

Max. Product Thickness: 1¹/₄".

Cord Location: 4' Cord – lower left side on back of unit.

OPTIONS AND ACCESSORIES – PAGE 7



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL TOAST-KING METAL SHEATHED HEATING ELEMENTS.



TRH-60 Conveyor Toaster


OPTIONS (available at time of purchase only)

- TRH-SECURITY** Control Cover, Bracket and Mounting Hardware (TRH Models only)
- TK-SECURITY** Control Cover, Bracket, Mounting Hardware and Fuse Cover (TK Models only)

ACCESSORIES (available for purchase at any time)

Receptacles

- 20A-RECEP-250** 20 Amp, 250V (NEMA 6-20R)
- 30A-RECEP-125** 30 Amp, 125V (NEMA 5-30R)
- 30A-RECEP-250** 30 Amp, 250V (NEMA 6-30R)
- 4"LEGS** 4" Adjustable Legs (4)
- TK-3BSKT-TL** Baskets for Jumbo 5½" Buns (qty 9) – 3-Slice Models only

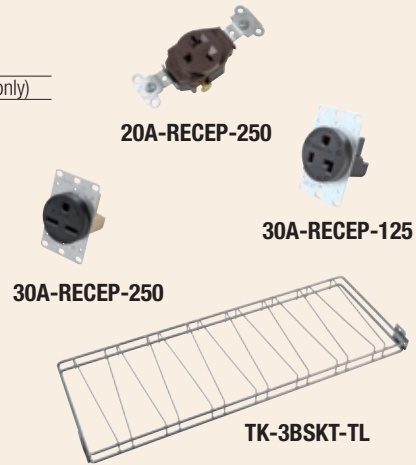

CONVEYOR TOASTER RATINGS

Model	120V/1 Ø Amps	208V/1 Ø Amps	240V/1 Ø Amps	kW
TRH-50	22.8	13.2	11.4	2.7
TRH-60		18.5	16.0	3.8
TK-72		19.4	16.8	4.0
TK-100		24.0	21.0	5.0
TK-135B		20.7	17.9	4.3
TK-155B		24.0	20.8	5.0